

AMERICAN NATIONAL STANDARD

Preferred Metric Limits and Fits

ANSI B4.2 - 1978

REAFFIRMED 1999

FOR CURRENT COMMITTEE PERSONNEL
PLEASE SEE ASME MANUAL AS-11

SECRETARIAT

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

PUBLISHED BY

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

United Engineering Center 345 East 47th Street New York, N. Y. 10017

AMERICAN NATIONAL STANDARD

Preferred Metric Limits and Fits

ANSI B4.2 - 1978

REAFFIRMED 1984

SECRETARIAT

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

PUBLISHED BY

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

United Engineering Center 345 East 47th Street New York, N. Y. 10017

No part of this document may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

**Second printing — March 1979
Includes corrected pages iii, 7, 15, 43, 44, and 46.**

**Copyright © 1978 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All Rights Reserved
Printed in U.S.A.**

FOREWORD

The American National Standards Committee B4 was organized in June 1920, and it developed the American Standard ASA B4a-1925, Tolerances, Allowances and Gages for Metal Fits.

As a result of committee work during World War II by ASA and ABC (American, British, Canadian), American Standard, Limits and Fits for Engineering and Manufacturing (Part I), ASA B4.1-1947, was produced. The preface to that document made significant reference to the contribution of the ABC meetings in developing agreement on five basic principles, four of which apply to the present standard. These related to the desirability of establishing common definitions, a table of preferred basic sizes, a system of preferred tolerances and allowances, and a uniform method of applying tolerances.

In 1973, the General Motors Corporation recognized a need for a metric standard similar to the ISO R286 and published an interim standard which was later adopted as an ANSI Special Metric Publication, SR 11.

The B4 Standards Committee was reorganized in November 1975, and renamed "Standardization of Allowances and Tolerances for Manufactured Parts". The first draft proposal of this standard was based on the principles noted above and utilized computer programs to implement the concept.

The preferred basic sizes have been selected from the American National Standard for Preferred Metric Sizes for Round, Square and Hexagonal Metal Products, B32.4-1974, and the first choice sizes are all consistently rounded off from the Renard 10 (R10) series of preferred numbers. A logical reduction or expansion of the first choice sizes can simply be achieved by utilizing the R5 or R20 series of preferred numbers as explained in this standard.

The selection of standard tolerance zones and preferred metric fits in this standard were based on international and national standards shown in the following list:

WORLD	ISO SYSTEM OF LIMITS AND FITS	PREFERRED TOLERANCE ZONES
	ISO/R286	ISO 1829
USA	ANSI SR 11	ANSI B4.1 (INCH STD)
JAPAN	JIS B 0401	JIS B 0401
GERMANY	DIN 7160/61	DIN 7157/54/55
FRANCE	NF E 02-100-118	NF E 02-131-135
U.K.	BSI 4500	BSI 4500
ITALY	UNI 6388/89	UNI 7218
CANADA	NONE	CSA B97.3 (INCH STD)
AUSTRALIA	AS 1654	AS 1654

The above standards have affected the availability of material stock, tooling and gages to the preferred ISO tolerances throughout the world. Implementation of this standard by industry can greatly reduce cost in manufacturing.

A draft proposal was circulated for letter ballot of the B4 Committee on October 16, 1976. Comments received as a result of this ballot led to changes and subsequent approval of the text by the Committee. Final approval for this standard was granted by the American National Standards Institute (ANSI) on 8 March 1978.

ACKNOWLEDGMENT

Tables 2, 3, 4 and 5 of the text and Tables A1 through A24 of the Appendix were developed by Massey-Ferguson and full rights to usage have been conveyed to ASME.

AMERICAN NATIONAL STANDARDS COMMITTEE B4

Standardization of Allowances and Tolerances for Manufactured Parts

(The following is the roster of the Committee at the time of approval of this Standard)

OFFICERS

Knut O. Kverneland, *Chairman*

C. J. Gomez, *Secretary*

COMMITTEE PERSONNEL

AMERICAN MEASURING TOOL MANUFACTURERS ASSOCIATION

R. P. Knittel, Glastonbury Gage, REB Industries, Inc., Glastonbury, Connecticut

AMERICAN SOCIETY OF MECHANICAL ENGINEERS, THE

A. E. Merritt, Harnischfeger Corporation, Milwaukee, Wisconsin

R. T. Woythal, Standard Machine Div., Kearney & Trecker Corporation, Milwaukee, Wisconsin

ANTI-FRICTION BEARING MANUFACTURERS ASSOCIATION, THE

K. D. MacKenzie, The Barden Corporation, Danbury, Connecticut

COMPUTERS AND BUSINESS EQUIPMENT MANUFACTURERS ASSOCIATION

A. E. Mall, International Business Machines Corporation, Endicott, New York

METAL CUTTING TOOL INSTITUTE

D. J. Emanuelli, Greenfield Tap & Die, A United-Greenfield Div. of TRW, Inc., Greenfield, Massachusetts

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION

F. V. Kupchak, Westinghouse Electric Corporation, R & D Center, Pittsburgh, Pennsylvania

R. L. Mancini, *Alternate*, National Electrical Manufacturers Association, New York, New York

NATIONAL FLUID POWER ASSOCIATION

J. R. Luecke, National Fluid Power Association, Milwaukee, Wisconsin

NATIONAL MACHINE TOOL BUILDERS ASSOCIATION

F. S. Blackall, III, The Taft-Peirce Manufacturing Company, Woonsocket, Rhode Island

W. L. McCann, Fond du Lac, Wisconsin

SOCIETY OF AUTOMOTIVE ENGINEERS, INC.

K. O. Kverneland, Massey-Ferguson, Inc., Detroit, Michigan

J. E. Long, General Motors Technical Center, Warren, Michigan

C. W. Stockwell, International Harvester, Hinsdale, Illinois

SOCIETY OF MANUFACTURING ENGINEERS

J. P. Wood, Society of Manufacturing Engineers, Dearborn, Michigan

SPORTING ARMS & AMMUNITIONS MANUFACTURERS ASSOCIATION

J. F. Walsh, Winchester-Western, Olin Corporation, New Haven, Connecticut

U. S. DEPARTMENT OF THE ARMY

M. E. Taylor, U. S. Army Armament Research Development Command, Dover, New Jersey

U.S. DEPARTMENT OF THE NAVY

C. A. Fulesdy, Naval Ship Systems Command, Washington, D.C.

R. M. Petros, *Alternate*, Naval Ship Systems Command, Washington, D.C.

U. S. MACHINE, CAP, WOOD & TAPPING SCREW BUREAUS

H. G. Muenchinger, Continental Screw Company, New Bedford, Massachusetts

INDIVIDUAL COMPANIES

- D. C. Blewitt*, Xerox Corporation, Webster, New York
- W. K. Luety, Alternate*, Xerox Corporation, Webster, New York
- D. E. Wendeln*, Monsanto Research, Miamisburg, Ohio

INDIVIDUAL MEMBERS

- H. W. Fahrlander, Sr.*, St. Petersburg, Florida
- R. E. W. Harrison*, Harrison Engineering Services, Washington, D.C.
- A. O. Schmidt*, University of Wisconsin, Milwaukee, Wisconsin

CONTENTS

SECTION	Page
1 Scope	1
2 Definitions	1
3 Description of Tolerance Designation	2
4 Symbols	2
5 Preferred Basic Sizes	2
6 Preferred Tolerance Zones	3
7 Preferred Fits	3
FIGURE	
1 Illustration of Definitions	1
2 Tolerance Zones for Internal Dimensions (Holes)	4
3 Tolerance Zones for External Dimensions (Shafts)	4
4 Preferred Hole Basis Fits	5
5 Preferred Shaft Basis Fits	6
6 Description of Preferred Fits	7
TABLE	
1 Preferred Sizes	3
2 Preferred Hole Basis Clearance Fits	8, 9
3 Preferred Hole Basis Transition and Interference Fits	10, 11
4 Preferred Shaft Basis Clearance Fits	12, 13
5 Preferred Shaft Basis Transition and Interference Fits	14, 15
APPENDIX	
A Tables of Deviation from Basic Sizes Up to 500 mm of Preferred Tolerance Zones	16
B Tables of International Tolerance Grades, Fundamental Deviations and Their Derivations	42
C Applications	62
D Reference Temperature	64

AMERICAN NATIONAL STANDARD

PREFERRED METRIC LIMITS AND FITS

1. SCOPE

This standard describes the ISO system of limits and fits for mating parts as it is approved for general engineering usage in the United States of America. It establishes: (1) the designation symbols used to define specific dimensional limits on drawings, material stock, related tools, gages, etc., (2) the preferred basic sizes (first and second choices), (3) the preferred tolerance zones (first, second and third choices), (4) the preferred limits and fits for sizes (first choice only) up to and including 500 millimeters, and (5) definitions of related terms. Tolerance zones for basic sizes in the range from 500 to 3150 mm are specified in Appendix B.

The general terms "hole" and "shaft" can also be taken as referring to the space containing or contained by two parallel faces of any part, such as the width of a slot, the thickness of a key, etc.

2. DEFINITIONS

The most important terms relating to limits and

fits are as shown in Figure 1. The terms are defined in words below:

(1) *Basic Size*. The size to which limits or deviations are assigned. The basic size is the same for both members of a fit. It is designated by the number 40 in 40H7.

(2) *Deviation*. The algebraic difference between a size and the corresponding basic size.

(3) *Upper Deviation*. The algebraical difference between the maximum limit of size and the corresponding basic size.

(4) *Lower Deviation*. The algebraic difference between the minimum limit of size and the corresponding basic size.

(5) *Fundamental Deviation*. That one of the two deviations closest to the basic size. It is designated by the letter H in 40H7.

(6) *Tolerance*. The difference between the maximum and minimum size limits on a part.

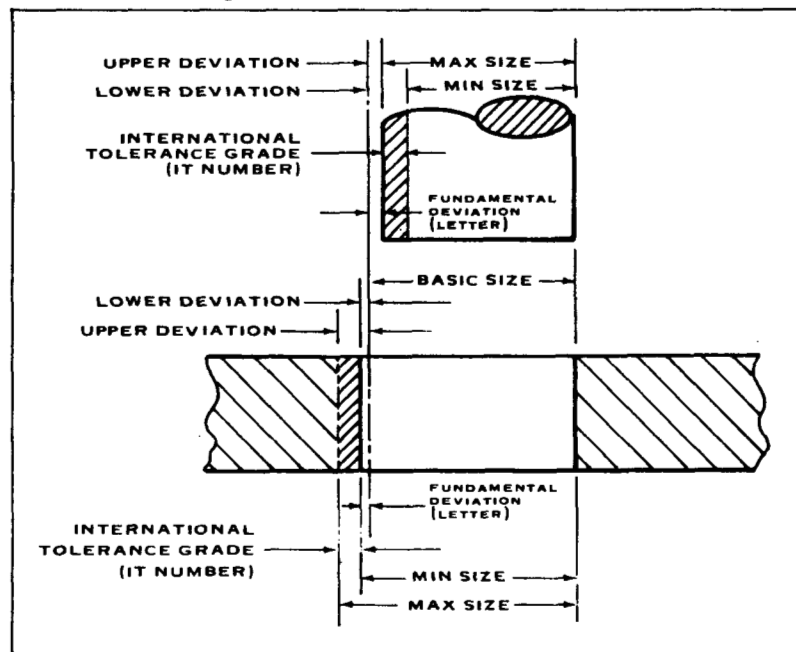


FIG. 1 ILLUSTRATION OF DEFINITIONS

(7) *Tolerance Zone*. A zone representing the tolerance and its position in relation to the basic size.

(8) *International Tolerance Grade (IT)*. A group of tolerances which vary depending on the basic size, but which provide the same relative level of accuracy within a given grade. It is designated by the number 7 in 40H7 (IT7).

(9) *Hole Basis*. The system of fits where the minimum hole size is basic. The fundamental deviation for a hole basis system is "H".

(10) *Shaft Basis*. The system of fits where the maximum shaft size is basic. The fundamental deviation for a shaft basis system is "h".

(11) *Clearance Fit*. The relationship between assembled parts when clearance occurs under all tolerance conditions.

(12) *Interference Fit*. The relationship between assembled parts when interference occurs under all tolerance conditions.

(13) *Transition Fit*. The relationship between assembled parts when either a clearance or interference fit can result depending on the tolerance conditions of the mating parts.

3. DESCRIPTION OF TOLERANCE DESIGNATION

An "International Tolerance grade" establishes the magnitude of the tolerance zone or the amount of part size variation allowed for internal and external dimensions alike (see Figure 1). Tolerances are expressed in "grade numbers", which are consistent with International Tolerance grades identified by the prefix IT, i.e., "IT6", "IT11", etc. A smaller grade number provides a smaller tolerance zone (see Appendix B, Table B1).



A fundamental deviation establishes the position of the tolerance zone with respect to the basic size (see Figure 1). Fundamental deviations are expressed by "tolerance position letters". Capital letters are used for internal dimensions (see Appendix B, Table B2), and lower case or small letters are used for external dimensions (see Appendix B, Table B3).

4. SYMBOLS

By combining the IT grade number and the tolerance position letter, the tolerance symbol is established which identifies the actual maximum and minimum


limits of the part. The toleranced size is thus defined by the basic size of the part followed by a symbol composed of a letter and a number.

Examples:

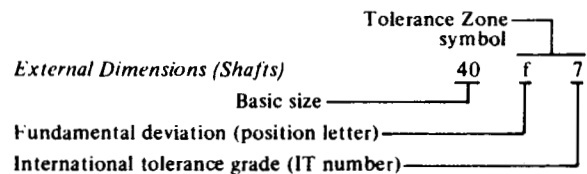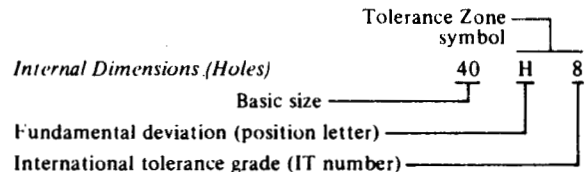

A fit is indicated by the basic size common to both components, followed by a symbol corresponding to each component, the internal part symbol preceding the external part symbol.

Example:



Some methods of designating tolerances on drawings, gages, etc. are shown in the following three examples.

- a. 40H8 b. 40H8 $\left(\begin{matrix} 40.039 \\ 40.000 \end{matrix} \right)$ c. $\begin{matrix} 40.039 \\ 40.000 \end{matrix}$ (40H8)

Note: Values in parentheses indicate reference only.

5. PREFERRED BASIC SIZES

The basic size of mating parts should, where possible, be chosen from the first choice sizes listed in Table 1, which were selected from the preferred diameters of round metal products in the American National Standard for Preferred Metric Sizes for Round, Square and Hexagonal Metal Products, B32.4-1974. The preference rating has been based on the RENARD'S series of preferred numbers (see American National Standards on Preferred Numbers, Z17.1-1973) and the first choice sizes shown in Table 1 follow approximately the preferred number series R10, where succeeding numbers in the series increase by 25%. The second choice series shown are rounded off from the R20 series of preferred numbers (12% increments).

The first choice sizes can be rationalized by selecting every second number in the series such as 1, 1.6, 2.5, 4, 6, 10, 16, etc., and this number series is rounded off from the R5 series of preferred numbers (60% increments).

Preferred sizes outside the range of 1 through 1000 are found by multiplying or dividing the sizes shown in Table 1 by 1000 or multiples thereof.

Table 1 Preferred Sizes

Basic Size, mm		Basic Size, mm		Basic Size, mm	
First Choice	Second Choice	First Choice	Second Choice	First Choice	Second Choice
1		10	11	100	110
	1.1				
1.2		12	14	120	140
	1.4				
1.6		16	18	160	180
	1.8				
2		20	22	200	220
	2.2				
2.5		25	28	250	280
	2.8				
3		30	35	300	350
	3.5				
4		40	45	400	450
	4.5				
5		50	55	500	550
	5.5				
6		60	70	600	700
	7				
8		80	90	800	900
	9			1000	

6. PREFERRED TOLERANCE ZONES

The preferred tolerance zones are shown in Figure 2 for internal dimensions and in Figure 3 for external dimensions. The encircled tolerance zones (13 each) are first choice, the framed tolerance zones are second choice, and the open tolerance zones are third choice. The encircled tolerance zones are specified for all preferred fits in this standard.

Deviations from basic size for all tolerance zones in Figures 2 and 3 are tabulated in sizes over 0 to 500 mm in Appendix A.

Deviations from basic size for all tolerance zones not shown in Figure 2 and Figure 3 may be calculated from table values given in Appendix B for sizes up to 3150 mm.

7. PREFERRED FITS


First choice tolerance zones are used to establish preferred fits in this standard, as shown to relative scale in Figure 4 for hole basis and in Figure 5 for shaft basis fits. Hole basis fits have a fundamental deviation of "H" on the hole, and shaft basis fits have a fundamental deviation of "h" on the shaft. A description of both types of fits which have the same relative fit condition is given in Figure 6. Normally, the hole basis system is preferred, however, when a common shaft mates with several holes, the shaft basis system should be used. Thus, clearance fit H7/h6 is included in both hole basis and shaft basis fits.

The hole basis and shaft basis fits of Figure 6 are combined with the first choice sizes of Table 1 to form Tables 2, 3, 4 and 5 where the specific limits as well as the resultant fits are tabulated.

If the required size is not tabulated in Tables 2, 3, 4 and 5, the preferred fit can be calculated from numerical values shown in Tables A1 through A24 in Appendix A.

It is anticipated that other fit conditions may be necessary to suit special requirements, and a preferred fit can be loosened or tightened simply by selecting a standard tolerance zone in Figure 2 or 3. Other fit conditions may be calculated from the numerical values for standard tolerance zones shown in Tables A1 through A24 in Appendix A.


Information on how to calculate the limit dimensions, clearances, and interferences, for non-preferred fits and sizes can be found in Appendix A and Appendix B.

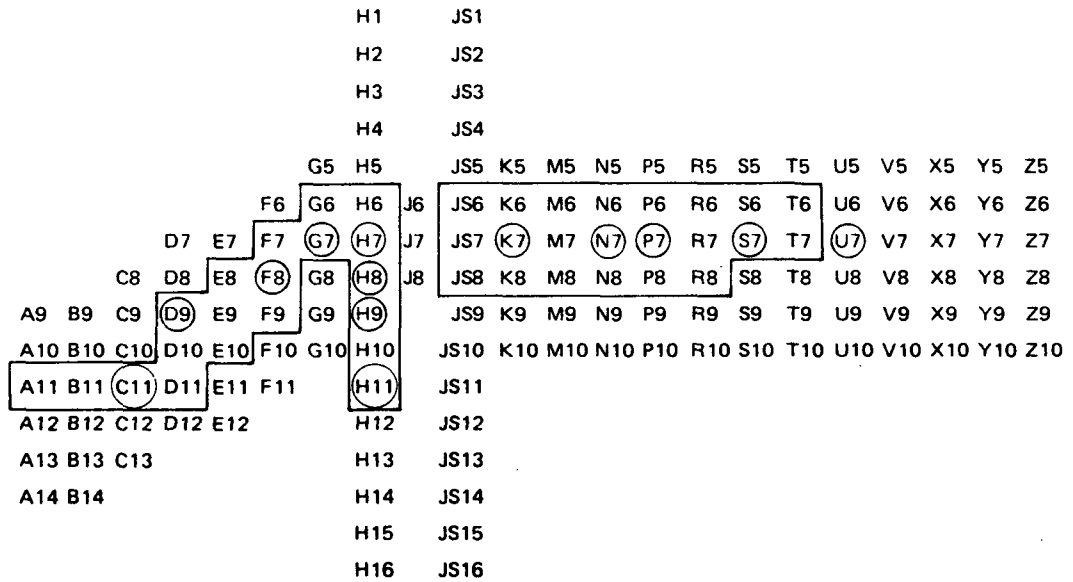

For numeric values of tolerance zones shown see Appendix A.

FIG. 2 TOLERANCE ZONES FOR INTERNAL DIMENSIONS (HOLES)

Legend: First choice tolerance zones encircled (ANSI B4.2 preferred)
Second choice tolerance zones framed (ISO 1829 selected)
Third choice tolerance zones open

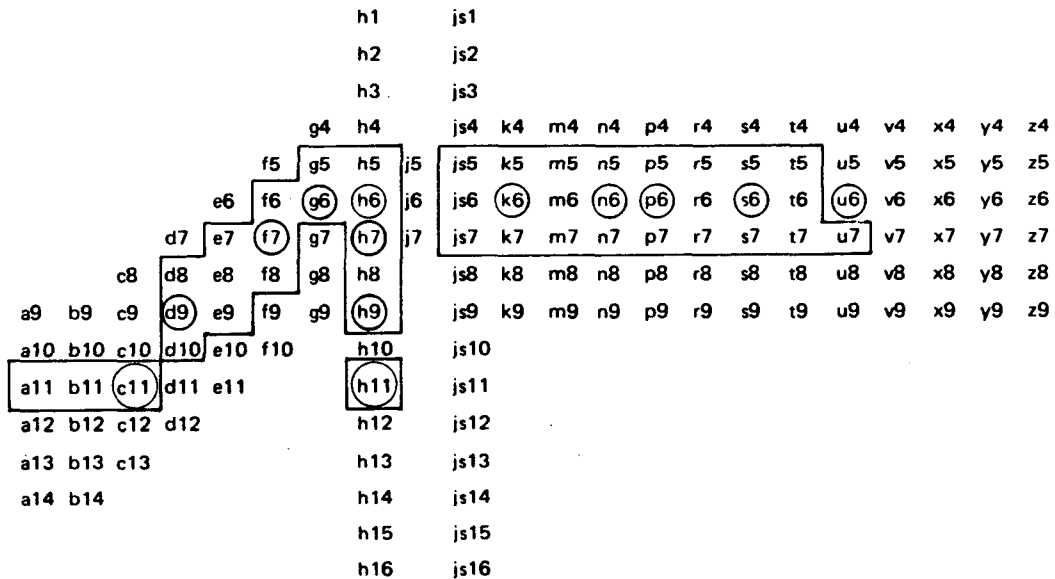

For numeric values of tolerance zones shown see Appendix A.

FIG. 3 TOLERANCE ZONES FOR EXTERNAL DIMENSIONS (SHAFTS)

Legend: First choice tolerance zones encircled (ANSI B4.2 preferred)
Second choice tolerance zones framed (ISO 1829 selected)
Third choice tolerance zones open

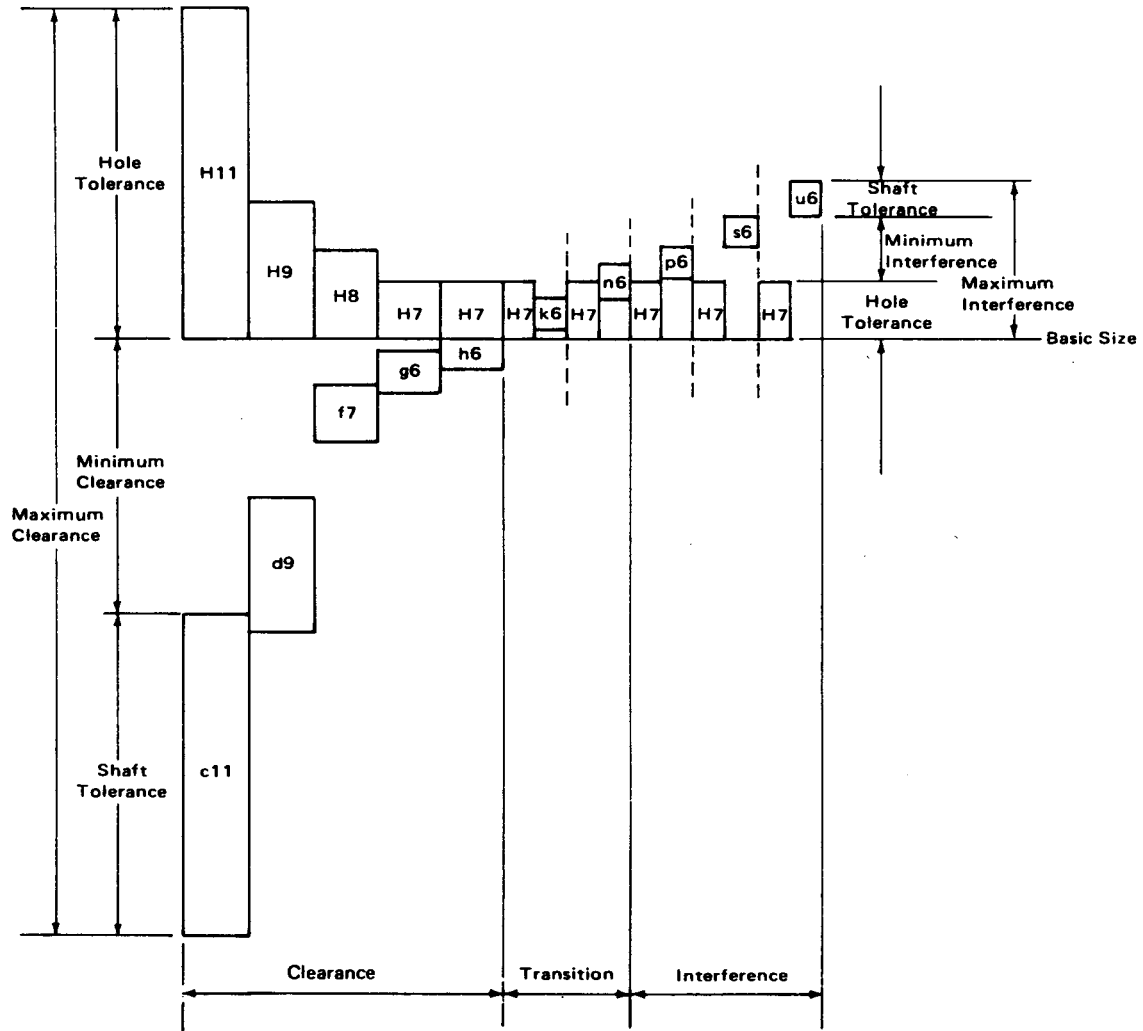


FIG. 4 PREFERRED HOLE BASIS FITS

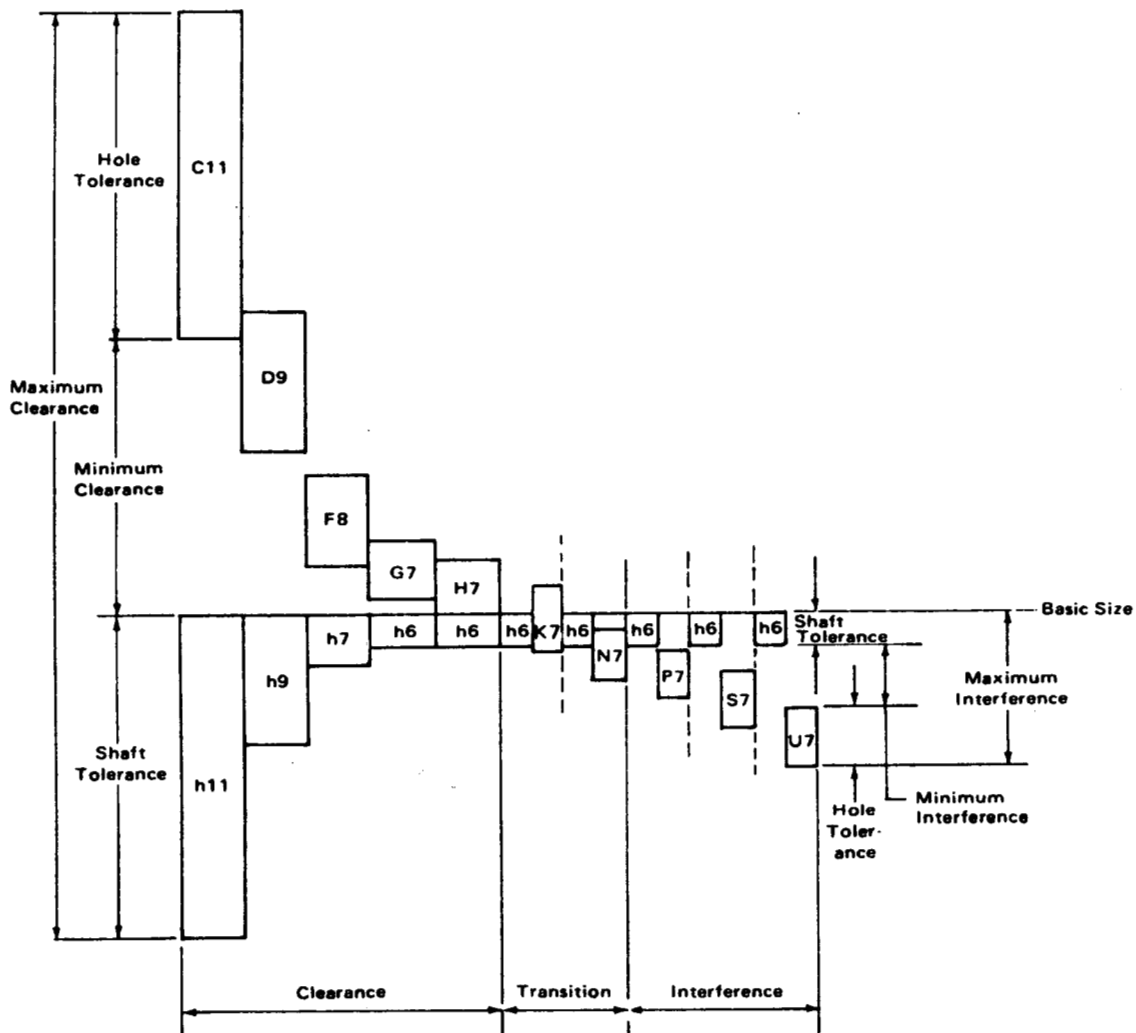


FIG. 5 PREFERRED SHAFT BASIS FITS

ISO SYMBOL		DESCRIPTION
Hole Basis	Shaft ¹ Basis	
H11/c11	C11/h11	<i>Loose running</i> fit for wide commercial tolerances or allowances on external members.
H9/d9	D9/h9	<i>Free running</i> fit not for use where accuracy is essential, but good for large temperature variations, high running speeds, or heavy journal pressures.
H8/f7	F8/h7	<i>Close running</i> fit for running on accurate machines and for accurate location at moderate speeds and journal pressures.
H7/g6	G7/h6	<i>Sliding</i> fit not intended to run freely, but to move and turn freely and locate accurately.
H7/h6	H7/h6	<i>Locational clearance</i> fit provides snug fit for locating stationary parts; but can be freely assembled and disassembled.
H7/k6	K7/h6	<i>Locational transition</i> fit for accurate location, a compromise between clearance and interference.
H7/n6	N7/h6	<i>Locational transition</i> fit for more accurate location where greater interference is permissible.
H7/p6	P7/h6	<i>Locational interference</i> fit for parts requiring rigidity and alignment with prime accuracy of location but without special bore pressure requirements.
H7/s6	S7/h6	<i>Medium drive</i> fit for ordinary steel parts or shrink fits on light sections, the tightest fit usable with cast iron.
H7/u6	U7/h6	<i>Force</i> fit suitable for parts which can be highly stressed or for shrink fits where the heavy pressing forces required are impractical.

¹ The transition and interference shaft basis fits shown do not convert to exactly the same hole basis fit conditions for basic sizes in range from 0 through 3 mm. Interference fit P7/h6 converts to a transition fit H7/p6 in the above size range.

FIG. 6 DESCRIPTION OF PREFERRED FITS

TABLE 2 PREFERRED HOLE BASIS CLEARANCE FITS

BASIC SIZE	LOOSE RUNNING		FREE RUNNING		CLOSE RUNNING		SLIDING		LOCATIONAL CLEARANCE		
	Hole H11	Shaft c11	Hole H9	Shaft d9	Hole H8	Shaft f7	Hole H7	Shaft g6	Hole H7	Shaft h6	
1	MAX 1.060	0.940	0.180	0.980	0.070	0.994	0.030	0.998	0.018	1.000	0.016
	MIN 1.000	0.880	0.060	0.955	0.020	0.984	0.006	0.992	0.002	1.000	0.000
1.2	MAX 1.260	1.140	0.180	1.180	0.070	1.194	0.030	1.198	0.018	1.210	0.016
	MIN 1.200	1.080	0.060	1.155	0.020	1.184	0.006	1.192	0.002	1.200	0.000
1.6	MAX 1.660	1.540	0.180	1.580	0.070	1.594	0.030	1.598	0.018	1.610	0.016
	MIN 1.600	1.480	0.060	1.555	0.020	1.584	0.006	1.592	0.002	1.600	0.000
2	MAX 2.060	1.940	0.180	1.980	0.070	1.994	0.030	1.998	0.018	2.010	0.016
	MIN 2.000	1.880	0.060	1.955	0.020	1.984	0.006	1.992	0.002	2.000	0.000
2.5	MAX 2.560	2.440	0.180	2.480	0.070	2.494	0.030	2.498	0.018	2.510	0.016
	MIN 2.500	2.380	0.060	2.455	0.020	2.484	0.006	2.492	0.002	2.500	0.000
3	MAX 3.060	2.940	0.180	2.980	0.070	2.994	0.030	2.998	0.018	3.010	0.016
	MIN 3.000	2.880	0.060	2.955	0.020	2.984	0.006	2.992	0.002	3.000	0.000
4	MAX 4.075	3.930	0.220	3.970	0.090	3.984	0.040	3.988	0.024	4.012	0.020
	MIN 4.000	3.855	0.070	3.940	0.030	3.978	0.010	3.986	0.004	4.000	0.000
5	MAX 5.075	4.930	0.220	4.970	0.090	4.984	0.040	4.988	0.024	5.012	0.020
	MIN 5.000	4.855	0.070	4.940	0.030	4.978	0.010	4.986	0.004	5.000	0.000
6	MAX 6.075	5.930	0.220	5.970	0.090	5.984	0.040	5.988	0.024	6.012	0.020
	MIN 6.000	5.855	0.070	5.940	0.030	5.978	0.010	5.986	0.004	6.000	0.000
8	MAX 8.090	7.920	0.260	7.960	0.112	7.974	0.050	7.978	0.035	8.015	0.024
	MIN 8.000	7.830	0.080	7.924	0.040	7.972	0.013	7.986	0.005	8.000	0.000
10	MAX 10.090	9.920	0.260	9.960	0.112	9.974	0.050	9.978	0.035	10.015	0.024
	MIN 10.000	9.830	0.080	9.924	0.040	9.972	0.013	9.986	0.005	10.000	0.000
12	MAX 12.110	11.905	0.315	11.950	0.136	11.984	0.061	11.994	0.035	12.018	0.029
	MIN 12.000	11.795	0.095	11.907	0.050	11.986	0.016	11.983	0.006	12.000	0.000
16	MAX 16.110	15.905	0.315	15.950	0.136	15.984	0.061	15.994	0.035	16.018	0.029
	MIN 16.000	15.795	0.095	15.907	0.050	15.986	0.016	15.983	0.006	16.000	0.000
20	MAX 20.130	19.890	0.370	19.935	0.169	19.984	0.074	19.993	0.041	20.021	0.034
	MIN 20.000	19.760	0.110	19.883	0.065	19.959	0.020	19.980	0.007	20.000	0.000
25	MAX 25.130	24.890	0.370	24.935	0.169	24.984	0.074	24.993	0.041	25.021	0.034
	MIN 25.000	24.760	0.110	24.883	0.065	24.959	0.020	24.980	0.007	25.000	0.000
30	MAX 30.130	29.890	0.370	29.935	0.169	29.984	0.074	29.993	0.041	30.021	0.034
	MIN 30.000	29.760	0.110	29.883	0.065	29.959	0.020	29.980	0.007	30.000	0.000

Dimensions in mm.

Dimensions in mm.

BASIC SIZE	LOOSE RUNNING		FREE RUNNING		CLOSE RUNNING		SLIDING		LOCATIONAL CLEARANCE		
	Hole H11	Shaft c11	Hole H9	Shaft d9	Hole H8	Shaft f7	Hole H7	Shaft g6	Hole H7	Shaft h6	
40	MAX MIN	39.880 39.720	0.440 0.120	39.920 39.858	0.204 0.060	40.039 39.975	0.089 0.009	40.025 39.991	0.050 0.009	40.025 40.000	0.041 0.000
50	MAX MIN	49.870 49.710	0.450 0.130	49.920 49.858	0.204 0.080	50.039 49.975	0.089 0.009	50.025 49.991	0.050 0.009	50.025 50.000	0.041 0.000
60	MAX MIN	59.860 59.670	0.520 0.140	59.900 59.826	0.248 0.100	60.046 59.970	0.106 0.030	60.030 59.990	0.059 0.010	60.030 60.000	0.049 0.000
80	MAX MIN	79.850 79.660	0.530 0.150	79.900 79.826	0.248 0.100	80.046 79.970	0.106 0.030	80.030 79.990	0.059 0.010	80.030 80.000	0.049 0.000
100	MAX MIN	99.830 99.610	0.610 0.170	99.880 99.793	0.294 0.120	100.054 99.964	0.125 0.036	100.035 99.988	0.069 0.012	100.035 100.000	0.057 0.000
120	MAX MIN	119.820 119.600	0.620 0.180	119.880 119.793	0.294 0.120	120.054 119.964	0.125 0.036	120.035 119.988	0.069 0.012	120.035 120.000	0.057 0.000
160	MAX MIN	159.790 159.540	0.710 0.210	159.855 159.755	0.345 0.145	160.063 159.957	0.146 0.043	160.040 159.986	0.079 0.014	160.040 160.000	0.065 0.000
200	MAX MIN	199.760 199.470	0.820 0.240	199.830 199.715	0.400 0.170	200.072 199.904	0.168 0.050	200.046 199.985	0.090 0.015	200.046 200.000	0.075 0.000
250	MAX MIN	249.720 249.430	0.860 0.280	249.830 249.715	0.400 0.170	250.072 249.904	0.168 0.050	250.046 249.985	0.090 0.015	250.046 250.000	0.075 0.000
300	MAX MIN	299.670 299.350	0.970 0.330	299.810 299.680	0.450 0.190	300.081 299.892	0.189 0.056	300.052 299.983	0.101 0.017	300.052 300.000	0.084 0.000
400	MAX MIN	399.600 399.240	1.120 0.400	399.790 399.650	0.490 0.210	400.089 399.881	0.208 0.062	400.057 399.946	0.111 0.018	400.057 400.000	0.093 0.000
500	MAX MIN	499.520 499.120	1.280 0.480	499.770 499.615	0.540 0.230	500.097 499.869	0.228 0.068	500.063 499.940	0.123 0.020	500.063 500.000	0.103 0.000

TABLE 2 PREFERRED HOLE BASIS CLEARANCE FITS (Continued)

TABLE 3 PREFERRED HOLE BASIS TRANSITION AND INTERFERENCE FITS

BASIC SIZE	LOCATIONAL TRANSN. Shaft k6		LOCATIONAL TRANSN. Hole H7		LOCATIONAL INTERF. Shaft p6		LOCATIONAL INTERF. Hole H7		MEDIUM DRIVE Shaft s6		MEDIUM DRIVE Hole H7		FORCE Shaft u6		FORCE Hole H7						
	Hole	Fit	Hole	Fit	Shaft	Fit	Hole	Fit	Hole	Fit	Hole	Fit	Hole	Fit	Hole	Fit					
1	MAX	1.006	0.010	1.010	0.006	1.010	0.004	1.010	0.012	0.004	1.020	-0.004	1.010	1.024	-0.008	1.000	1.018	-0.024			
	MIN	1.000	-0.006	1.000	-0.010	1.000	-0.012	1.000	-0.012	1.014	-0.020	1.000	-0.020	1.000	1.014	-0.024	1.000	1.014	-0.024		
1.2	MAX	1.210	0.010	1.210	0.006	1.210	0.004	1.210	0.012	0.004	1.220	-0.004	1.210	1.224	-0.008	1.200	1.218	-0.024	1.200	1.218	-0.024
	MIN	1.200	-0.006	1.200	-0.010	1.200	-0.012	1.200	-0.012	1.214	-0.020	1.200	-0.020	1.200	1.214	-0.024	1.200	1.214	-0.024	1.200	1.214
1.6	MAX	1.610	0.010	1.610	0.006	1.610	0.006	1.610	0.012	0.004	1.620	-0.004	1.610	1.624	-0.008	1.600	1.618	-0.024	1.600	1.618	-0.024
	MIN	1.600	-0.006	1.600	-0.010	1.600	-0.012	1.600	-0.012	1.614	-0.020	1.600	-0.020	1.600	1.614	-0.024	1.600	1.614	-0.024	1.600	1.614
2	MAX	2.010	0.010	2.010	0.006	2.010	0.006	2.010	0.012	0.004	2.020	-0.004	2.010	2.024	-0.008	2.000	2.018	-0.024	2.000	2.018	-0.024
	MIN	2.000	-0.006	2.000	-0.010	2.000	-0.012	2.000	-0.012	2.014	-0.020	2.000	-0.020	2.000	2.014	-0.024	2.000	2.014	-0.024	2.000	2.014
2.5	MAX	2.510	0.010	2.510	0.006	2.510	0.006	2.510	0.012	0.004	2.520	-0.004	2.510	2.524	-0.008	2.500	2.518	-0.024	2.500	2.518	-0.024
	MIN	2.500	-0.006	2.500	-0.010	2.500	-0.012	2.500	-0.012	2.514	-0.020	2.500	-0.020	2.500	2.514	-0.024	2.500	2.514	-0.024	2.500	2.514
3	MAX	3.010	0.010	3.010	0.006	3.010	0.006	3.010	0.012	0.004	3.020	-0.004	3.010	3.024	-0.008	3.000	3.018	-0.024	3.000	3.018	-0.024
	MIN	3.000	-0.006	3.000	-0.010	3.000	-0.012	3.000	-0.012	3.014	-0.020	3.000	-0.020	3.000	3.014	-0.024	3.000	3.014	-0.024	3.000	3.014
4	MAX	4.012	0.011	4.009	0.009	4.012	0.004	4.012	0.012	0.004	4.027	-0.007	4.012	4.031	-0.011	4.000	4.023	-0.031	4.000	4.023	-0.031
	MIN	4.000	-0.009	4.001	-0.009	4.000	-0.014	4.000	-0.012	4.016	-0.020	4.000	-0.020	4.000	4.016	-0.024	4.000	4.016	-0.024	4.000	4.016
5	MAX	5.012	0.011	5.009	0.009	5.012	0.004	5.012	0.012	0.004	5.027	-0.007	5.012	5.031	-0.011	5.000	5.023	-0.031	5.000	5.023	-0.031
	MIN	5.000	-0.009	5.001	-0.009	5.000	-0.016	5.000	-0.012	5.016	-0.020	5.000	-0.020	5.000	5.016	-0.024	5.000	5.016	-0.024	5.000	5.016
6	MAX	6.012	0.011	6.009	0.009	6.012	0.004	6.012	0.012	0.004	6.027	-0.007	6.012	6.031	-0.011	6.000	6.023	-0.031	6.000	6.023	-0.031
	MIN	6.000	-0.009	6.001	-0.009	6.000	-0.016	6.000	-0.012	6.016	-0.020	6.000	-0.020	6.000	6.016	-0.024	6.000	6.016	-0.024	6.000	6.016
8	MAX	8.015	0.014	8.010	0.005	8.015	0.005	8.015	0.015	0.005	8.032	-0.008	8.015	8.037	-0.013	8.000	8.028	-0.037	8.000	8.028	-0.037
	MIN	8.000	-0.014	8.001	-0.014	8.000	-0.023	8.000	-0.015	8.019	-0.024	8.000	-0.024	8.000	8.019	-0.028	8.000	8.019	-0.028	8.000	8.019
10	MAX	10.015	0.014	10.010	0.005	10.015	0.005	10.015	0.015	0.005	10.032	-0.008	10.015	10.037	-0.013	10.000	10.028	-0.037	10.000	10.028	-0.037
	MIN	10.000	-0.014	10.001	-0.014	10.000	-0.023	10.000	-0.015	10.019	-0.024	10.000	-0.024	10.000	10.019	-0.028	10.000	10.019	-0.028	10.000	10.019
12	MAX	12.018	0.017	12.012	0.006	12.018	0.006	12.018	0.018	0.006	12.039	-0.010	12.018	12.044	-0.015	12.000	12.033	-0.044	12.000	12.033	-0.044
	MIN	12.000	-0.017	12.001	-0.017	12.000	-0.023	12.000	-0.018	12.029	-0.029	12.000	-0.029	12.000	12.029	-0.033	12.000	12.029	-0.033	12.000	12.029
16	MAX	16.018	0.017	16.012	0.006	16.018	0.006	16.018	0.018	0.006	16.039	-0.010	16.018	16.044	-0.015	16.000	16.033	-0.044	16.000	16.033	-0.044
	MIN	16.000	-0.017	16.001	-0.017	16.000	-0.023	16.000	-0.018	16.029	-0.029	16.000	-0.029	16.000	16.029	-0.033	16.000	16.029	-0.033	16.000	16.029
20	MAX	20.021	0.019	20.015	0.006	20.021	0.006	20.021	0.021	0.006	20.044	-0.014	20.021	20.054	-0.020	20.000	20.041	-0.054	20.000	20.041	-0.054
	MIN	20.000	-0.019	20.001	-0.019	20.000	-0.028	20.000	-0.022	20.035	-0.035	20.000	-0.035	20.000	20.035	-0.039	20.000	20.035	-0.039	20.000	20.035
25	MAX	25.021	0.019	25.015	0.006	25.021	0.006	25.021	0.025	0.006	25.044	-0.014	25.021	25.061	-0.027	25.000	25.048	-0.061	25.000	25.048	-0.061
	MIN	25.000	-0.019	25.001	-0.019	25.000	-0.028	25.000	-0.022	25.035	-0.035	25.000	-0.035	25.000	25.035	-0.039	25.000	25.035	-0.039	25.000	25.035
30	MAX	30.021	0.019	30.015	0.006	30.021	0.006	30.021	0.030	0.006	30.044	-0.014	30.021	30.061	-0.027	30.000	30.048	-0.061	30.000	30.048	-0.061
	MIN	30.000	-0.019	30.001	-0.019	30.000	-0.028	30.000	-0.022	30.035	-0.035	30.000	-0.035	30.000	30.035	-0.039	30.000	30.035	-0.039	30.000	30.035

TABLE 3 PREFERRED HOLE BASIS TRANSITION AND INTERFERENCE FITS (Continued)

Dimensions in mm.

BASIC SIZE	LOCALATIONAL TRANSN. k6		LOCALATIONAL TRANSN. n6		LOCALATIONAL INTERF. p6		MEDIUM DRIVE s6		FORCE Shaft u6						
	Hole H7	Shaft Fit	Hole H7	Shaft Fit	Hole H7	Shaft Fit	Hole H7	Shaft Fit	Hole H7	Shaft Fit					
40	MAX	+0.018	0.023	+0.025	+0.033	0.008	+0.025	+0.042	-0.001	+0.025	+0.059	-0.018	+0.025	+0.076	-0.035
	MIN	+0.000	-0.018	+0.000	+0.017	-0.033	+0.000	+0.026	-0.042	+0.000	+0.043	-0.059	+0.000	+0.060	-0.076
50	MAX	+0.018	0.023	+0.025	+0.033	0.008	+0.025	+0.042	-0.001	+0.025	+0.059	-0.018	+0.025	+0.086	-0.045
	MIN	+0.000	-0.018	+0.000	+0.017	-0.033	+0.000	+0.026	-0.042	+0.000	+0.043	-0.059	+0.000	+0.070	-0.086
60	MAX	+0.021	0.028	+0.030	+0.039	0.010	+0.030	+0.051	-0.002	+0.030	+0.072	-0.023	+0.030	+0.106	-0.057
	MIN	+0.000	-0.021	+0.000	+0.020	-0.039	+0.000	+0.032	-0.051	+0.000	+0.053	-0.072	+0.000	+0.087	-0.106
80	MAX	+0.021	0.028	+0.030	+0.039	0.010	+0.030	+0.051	-0.002	+0.030	+0.078	-0.029	+0.030	+0.121	-0.072
	MIN	+0.000	-0.021	+0.000	+0.020	-0.039	+0.000	+0.032	-0.051	+0.000	+0.059	-0.078	+0.000	+0.102	-0.121
100	MAX	+0.025	0.032	+0.035	+0.045	0.012	+0.035	+0.059	-0.002	+0.035	+0.093	-0.036	+0.035	+0.146	-0.089
	MIN	+0.000	-0.025	+0.000	+0.023	-0.045	+0.000	+0.037	-0.059	+0.000	+0.071	-0.093	+0.000	+0.124	-0.146
120	MAX	+0.025	0.032	+0.035	+0.045	0.012	+0.035	+0.059	-0.002	+0.035	+0.101	-0.044	+0.035	+0.166	-0.109
	MIN	+0.000	-0.025	+0.000	+0.023	-0.045	+0.000	+0.037	-0.059	+0.000	+0.079	-0.101	+0.000	+0.144	-0.166
160	MAX	+0.028	0.037	+0.040	+0.052	0.013	+0.040	+0.068	-0.003	+0.040	+0.125	-0.060	+0.040	+0.215	-0.150
	MIN	+0.000	-0.028	+0.000	+0.027	-0.052	+0.000	+0.043	-0.068	+0.000	+0.100	-0.125	+0.000	+0.190	-0.215
200	MAX	+0.033	0.042	+0.046	+0.060	0.015	+0.046	+0.079	-0.004	+0.046	+0.151	-0.076	+0.046	+0.265	-0.190
	MIN	+0.000	-0.033	+0.000	+0.031	-0.060	+0.000	+0.050	-0.079	+0.000	+0.122	-0.151	+0.000	+0.236	-0.265
250	MAX	+0.033	0.042	+0.046	+0.060	0.015	+0.046	+0.079	-0.004	+0.046	+0.169	-0.094	+0.046	+0.313	-0.238
	MIN	+0.000	-0.033	+0.000	+0.031	-0.060	+0.000	+0.050	-0.079	+0.000	+0.140	-0.169	+0.000	+0.284	-0.313
300	MAX	+0.036	0.048	+0.052	+0.066	0.018	+0.052	+0.088	-0.004	+0.052	+0.202	-0.118	+0.052	+0.382	-0.298
	MIN	+0.000	-0.036	+0.000	+0.034	-0.066	+0.000	+0.056	-0.088	+0.000	+0.170	-0.202	+0.000	+0.350	-0.382
400	MAX	+0.040	0.053	+0.057	+0.073	0.020	+0.057	+0.098	-0.005	+0.057	+0.244	-0.151	+0.057	+0.471	-0.378
	MIN	+0.000	-0.040	+0.000	+0.037	-0.073	+0.000	+0.062	-0.098	+0.000	+0.208	-0.244	+0.000	+0.435	-0.471
500	MAX	+0.045	0.058	+0.063	+0.080	0.023	+0.063	+0.108	-0.005	+0.063	+0.292	-0.189	+0.063	+0.580	-0.477
	MIN	+0.000	-0.045	+0.000	+0.040	-0.080	+0.000	+0.068	-0.108	+0.000	+0.252	-0.292	+0.000	+0.540	-0.580

TABLE 4 PREFERRED SHAFT BASIS CLEARANCE FITS

BASIC SIZE	LOOSE RUNNING		FREE RUNNING		CLOSE RUNNING		SLIDING		LOCATIONAL CLEARANCE	
	Hole C11	Shaft h11	Hole D9	Shaft h9	Hole F8	Shaft h7	Hole G7	Shaft h6	Hole H7	Shaft h6
1	MAX	1.120	1.045	1.000	1.020	1.000	1.012	1.000	1.010	1.000
	MIN	1.060	1.020	0.975	0.920	1.006	0.990	1.002	1.000	0.994
1.2	MAX	1.320	1.245	1.200	1.175	1.220	1.200	1.200	1.210	1.200
	MIN	1.260	1.220	1.175	1.120	1.206	1.190	1.202	1.200	1.194
1.6	MAX	1.720	1.645	1.600	1.575	1.620	1.600	1.600	1.610	1.600
	MIN	1.660	1.620	1.575	1.520	1.606	1.590	1.602	1.600	1.594
2	MAX	2.120	2.045	2.000	1.975	2.020	2.000	2.000	2.010	2.000
	MIN	2.060	2.020	1.975	1.920	2.006	1.990	2.002	2.000	1.994
2.5	MAX	2.620	2.545	2.500	2.475	2.520	2.500	2.500	2.510	2.500
	MIN	2.560	2.520	2.475	2.420	2.506	2.490	2.502	2.500	2.494
3	MAX	3.120	3.045	3.000	2.975	3.020	3.000	3.000	3.010	3.000
	MIN	3.060	3.020	2.975	2.920	3.006	2.990	3.002	3.000	2.994
4	MAX	4.145	4.060	4.000	3.975	4.020	4.000	4.000	4.012	4.000
	MIN	4.070	4.030	3.975	3.920	4.010	3.988	4.004	4.000	3.992
5	MAX	5.145	5.060	5.000	4.975	5.020	5.000	5.000	5.012	5.000
	MIN	5.070	5.030	4.975	4.920	5.010	4.988	5.004	5.000	4.992
6	MAX	6.145	6.060	6.000	5.975	6.020	6.000	6.000	6.012	6.000
	MIN	6.070	6.030	5.975	5.920	6.010	5.988	6.004	6.000	5.992
8	MAX	8.170	8.080	8.000	7.964	8.012	8.000	8.000	8.015	8.000
	MIN	8.080	8.040	7.964	7.908	8.013	7.985	8.005	8.000	7.991
10	MAX	10.170	10.080	10.000	9.964	10.012	10.000	10.000	10.015	10.000
	MIN	10.080	10.040	9.964	9.908	10.013	9.985	10.005	10.000	9.991
12	MAX	12.205	12.093	12.000	11.957	12.043	12.000	12.000	12.018	12.000
	MIN	12.095	12.050	11.957	11.901	12.016	11.982	12.006	12.000	11.989
16	MAX	16.205	16.093	16.000	15.957	16.043	16.000	16.000	16.018	16.000
	MIN	16.095	16.050	15.957	15.901	16.016	15.982	16.006	16.000	15.989
20	MAX	20.240	20.117	20.000	19.948	20.053	20.000	20.000	20.021	20.000
	MIN	20.110	20.065	19.948	19.892	20.020	19.979	20.007	20.000	19.987
25	MAX	25.240	25.117	25.000	24.948	25.053	25.000	25.000	25.021	25.000
	MIN	25.110	25.065	24.948	24.892	25.020	24.979	25.007	25.000	24.987
30	MAX	30.240	30.117	30.000	29.948	30.053	30.000	30.000	30.021	30.000
	MIN	30.110	30.065	29.948	29.892	30.020	29.979	30.007	30.000	29.987

Dimensions in mm.

Dimensions in mm.

TABLE 4 PREFERRED SHAFT BASIS CLEARANCE FITS (Continued)

BASIC SIZE	LOOSE RUNNING		FREE RUNNING		CLOSE RUNNING		SLIDING		LOCATIONAL CLEARANCE		
	Hole C11	Shaft h11	Hole D9	Shaft h9	Hole F8	Shaft h7	Hole G7	Shaft h6	Hole H7	Shaft h6	Fit
40	MAX	40.280	40.142	40.000	40.064	40.000	40.034	40.000	40.025	40.000	0.041
	MIN	40.120	40.080	39.938	0.080	40.025	39.975	40.009	40.000	39.984	0.000
50	MAX	50.290	50.142	50.000	0.204	50.064	50.000	50.034	50.025	50.000	0.041
	MIN	50.130	50.080	49.938	0.080	50.025	49.975	50.009	50.000	49.984	0.000
60	MAX	60.330	60.174	60.000	0.248	60.076	60.000	60.040	60.030	60.000	0.049
	MIN	60.140	60.100	59.926	0.100	60.030	59.970	60.010	60.000	59.981	0.000
80	MAX	80.340	80.174	80.000	0.248	80.076	80.000	80.040	80.030	80.000	0.049
	MIN	80.150	80.100	79.926	0.100	80.030	79.970	80.010	80.000	79.981	0.000
100	MAX	100.390	100.207	100.000	0.294	100.090	100.000	100.047	100.035	100.000	0.057
	MIN	100.170	100.120	99.913	0.120	100.036	99.965	100.012	100.000	99.978	0.000
120	MAX	120.400	120.207	120.000	0.294	120.090	120.000	120.047	120.035	120.000	0.057
	MIN	120.180	120.120	119.913	0.120	120.036	119.965	120.012	120.000	119.978	0.000
160	MAX	160.460	160.245	160.000	0.345	160.106	160.000	160.054	160.040	160.000	0.065
	MIN	160.210	160.145	159.900	0.145	160.043	159.960	160.014	160.000	159.975	0.000
200	MAX	200.530	200.285	200.000	0.400	200.122	200.000	200.061	200.046	200.000	0.075
	MIN	200.240	200.170	199.885	0.170	200.050	199.954	200.015	200.000	199.971	0.000
250	MAX	250.570	250.285	250.000	0.400	250.122	250.000	250.061	250.046	250.000	0.075
	MIN	250.280	250.170	249.885	0.170	250.050	249.954	250.015	250.000	249.971	0.000
300	MAX	300.650	300.320	300.000	0.450	300.137	300.000	300.069	300.052	300.000	0.084
	MIN	300.330	300.190	299.870	0.190	300.056	299.944	300.017	300.000	299.968	0.000
400	MAX	400.760	400.350	400.000	0.490	400.151	400.000	400.075	400.057	400.000	0.093
	MIN	400.400	400.210	399.840	0.210	400.062	399.943	400.018	400.000	399.964	0.000
500	MAX	500.880	500.385	500.000	0.540	500.165	500.000	500.083	500.063	500.000	0.103
	MIN	500.480	500.230	499.845	0.230	500.068	499.937	500.020	500.000	499.960	0.000

TABLE 5 PREFERRED SHAFT BASIS TRANSITION AND INTERFERENCE FITS

BASIC SIZE	LOCALITIONAL TRANSN.		LOCALITIONAL TRANSN.		LOCALITIONAL INTERF.		MEDIUM DRIVE		FORCE	
	Hole K7	Shaft h6	Hole N7	Shaft h6	Hole P7	Shaft h6	Hole S7	Shaft h6	Hole U7	Shaft h6
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
1	1.000	0.006	0.996	1.000	0.002	0.994	1.000	0.000	0.982	1.000
	0.990	-0.010	0.986	0.994	-0.014	0.984	0.994	-0.016	0.972	0.994
1.2	1.200	0.006	1.196	1.200	0.002	1.194	1.200	0.000	1.182	1.200
	1.190	-0.010	1.186	1.194	-0.014	1.184	1.194	-0.016	1.172	1.194
1.6	1.600	0.006	1.596	1.600	0.002	1.594	1.600	0.000	1.582	1.600
	1.590	-0.010	1.586	1.594	-0.014	1.584	1.594	-0.016	1.572	1.594
2	2.000	0.006	1.996	2.000	0.002	1.994	2.000	0.000	1.982	2.000
	1.990	-0.010	1.986	1.994	-0.014	1.984	1.994	-0.016	1.972	1.994
2.5	2.500	0.006	2.496	2.500	0.002	2.494	2.500	0.000	2.482	2.500
	2.490	-0.010	2.486	2.494	-0.014	2.484	2.494	-0.016	2.472	2.494
3	3.000	0.006	2.996	3.000	0.002	2.994	3.000	0.000	2.982	3.000
	2.990	-0.010	2.986	2.994	-0.014	2.984	2.994	-0.016	2.972	2.994
4	4.000	0.011	3.996	4.000	0.004	3.992	4.000	0.000	3.981	4.000
	3.991	-0.009	3.984	3.992	-0.016	3.980	3.992	-0.020	3.969	3.992
5	5.000	0.011	4.996	5.000	0.004	4.992	5.000	0.000	4.981	5.000
	4.991	-0.009	4.984	4.992	-0.016	4.980	4.992	-0.020	4.969	4.992
6	6.000	0.011	5.996	6.000	0.004	5.992	6.000	0.000	5.981	6.000
	5.991	-0.009	5.984	5.992	-0.016	5.980	5.992	-0.020	5.969	5.992
8	8.000	0.014	7.996	8.000	0.005	7.991	8.000	0.000	7.978	8.000
	7.990	-0.010	7.981	7.991	-0.019	7.976	7.991	-0.024	7.963	7.991
10	10.000	0.014	9.996	10.000	0.005	9.991	10.000	0.000	9.978	10.000
	9.990	-0.010	9.981	9.991	-0.019	9.976	9.991	-0.024	9.963	9.991
12	12.000	0.017	11.996	12.000	0.006	11.989	12.000	0.000	11.974	12.000
	11.988	-0.012	11.977	11.989	-0.023	11.971	11.989	-0.029	11.956	11.989
16	16.000	0.017	15.996	16.000	0.006	15.989	16.000	0.000	15.974	16.000
	15.988	-0.012	15.977	15.989	-0.023	15.971	15.989	-0.029	15.956	15.989
20	20.000	0.019	19.993	20.000	0.006	19.986	20.000	0.000	19.967	20.000
	19.985	-0.015	19.972	19.987	-0.028	19.965	19.987	-0.035	19.946	19.987
25	25.000	0.019	24.993	25.000	0.006	24.986	25.000	0.000	24.960	25.000
	24.985	-0.015	24.972	24.987	-0.028	24.965	24.987	-0.035	24.939	24.987
30	30.000	0.019	29.993	30.000	0.006	29.986	30.000	0.000	29.960	30.000
	29.985	-0.015	29.972	29.987	-0.028	29.965	29.987	-0.035	29.939	29.987

Dimensions in mm.

TABLE 5 PREFERRED SHAFT BASIS TRANSITION AND INTERFERENCE FITS (Continued)

BASIC SIZE	LOCATIONAL TRANSN.		LOCATIONAL TRANSN.		LOCATIONAL INTERF.		MEDIUM DRIVE		FORCE								
	Hole K7	Shaft h6	Hole N7	Shaft h6	Hole P7	Shaft h6	Hole S7	Shaft h6	Hole U7	Shaft h6							
40	MAX	40.007	40.000	40.000	39.992	40.000	0.008	0.008	39.983	40.000	-0.001	39.966	40.000	-0.016	39.949	40.000	-0.035
	MIN	39.982	39.984	-0.016	39.967	39.984	-0.033	39.958	39.984	-0.042	39.958	-0.042	39.941	39.984	-0.059	39.924	39.984
50	MAX	50.007	50.000	50.000	49.992	50.000	0.008	0.008	49.983	50.000	-0.001	49.966	50.000	-0.016	49.939	50.000	-0.045
	MIN	49.982	49.984	-0.016	49.967	49.984	-0.033	49.958	49.984	-0.042	49.958	-0.042	49.941	49.984	-0.059	49.914	49.984
60	MAX	60.009	60.000	60.000	59.991	60.000	0.010	0.010	59.979	60.000	-0.002	59.958	60.000	-0.023	59.924	60.000	-0.057
	MIN	59.979	59.981	-0.021	59.961	59.981	-0.039	59.949	59.981	-0.051	59.949	-0.051	59.928	59.981	-0.072	59.894	59.981
80	MAX	80.009	80.000	80.000	79.991	80.000	0.010	0.010	79.979	80.000	-0.002	79.952	80.000	-0.029	79.909	80.000	-0.072
	MIN	79.979	79.981	-0.021	79.961	79.981	-0.039	79.949	79.981	-0.051	79.949	-0.051	79.922	79.981	-0.078	79.879	79.981
100	MAX	100.010	100.000	100.000	99.990	100.000	0.012	0.012	99.976	100.000	-0.002	99.942	100.000	-0.036	99.889	100.000	-0.089
	MIN	99.975	99.978	-0.025	99.955	99.978	-0.045	99.941	99.978	-0.059	99.941	-0.059	99.907	99.978	-0.093	99.854	99.978
120	MAX	120.010	120.000	120.000	119.990	120.000	0.012	0.012	119.976	120.000	-0.002	119.934	120.000	-0.044	119.869	120.000	-0.109
	MIN	119.975	119.978	-0.025	119.955	119.978	-0.045	119.941	119.978	-0.059	119.941	-0.059	119.899	119.978	-0.101	119.834	119.978
160	MAX	160.012	160.000	160.000	159.988	160.000	0.013	0.013	159.972	160.000	-0.003	159.915	160.000	-0.060	159.825	160.000	-0.150
	MIN	159.972	159.975	-0.028	159.948	159.975	-0.052	159.932	159.975	-0.068	159.932	-0.068	159.875	159.975	-0.125	159.785	159.975
200	MAX	200.013	200.000	200.000	199.986	200.000	0.015	0.015	199.967	200.000	-0.004	199.895	200.000	-0.076	199.781	200.000	-0.190
	MIN	199.967	199.971	-0.033	199.940	199.971	-0.060	199.921	199.971	-0.079	199.921	-0.079	199.849	199.971	-0.151	199.735	199.971
250	MAX	250.013	250.000	250.000	249.986	250.000	0.015	0.015	249.967	250.000	-0.004	249.877	250.000	-0.094	249.733	250.000	-0.238
	MIN	249.967	249.971	-0.033	249.940	249.971	-0.060	249.921	249.971	-0.079	249.921	-0.079	249.831	249.971	-0.169	249.687	249.971
300	MAX	300.016	300.000	300.000	299.986	300.000	0.016	0.016	299.964	300.000	-0.004	299.850	300.000	-0.118	299.670	300.000	-0.298
	MIN	299.964	299.968	-0.036	299.934	299.968	-0.066	299.912	299.968	-0.088	299.912	-0.088	299.798	299.968	-0.202	299.618	299.968
400	MAX	400.017	400.000	400.000	399.984	400.000	0.020	0.020	399.959	400.000	-0.005	399.813	400.000	-0.151	399.586	400.000	-0.378
	MIN	399.960	399.964	-0.040	399.927	399.964	-0.073	399.902	399.964	-0.098	399.902	-0.098	399.756	399.964	-0.244	399.529	399.964
500	MAX	500.018	500.000	500.000	499.983	500.000	0.023	0.023	499.955	500.000	-0.005	499.771	500.000	-0.189	499.483	500.000	-0.477
	MIN	499.955	499.960	-0.045	499.920	499.960	-0.080	499.892	499.960	-0.108	499.892	-0.108	499.708	499.960	-0.292	499.420	499.960

Dimensions in mm.

APPENDIX A

Tables of Deviation From Basic Sizes up to 500 mm of Preferred Tolerance Zones²

INDEX

Tolerance Zone Ranges	Table Number
Holes	
A14 through A9 and B14 through B9	A1
C13 through C8 and D12 through D7	A2
E12 through E7 and F11 through F6	A3
G10 through G5 and J8 through J6	A4
H16 through H1	A5
JS16 through JS1	A6
K10 through K5 and M10 through M5	A7
N10 through N5 and P10 through P5	A8
R10 through R5 and S10 through S5	A9
T10 through T5 and U10 through U5	A10
V10 through V5 and X10 through X5	A11
Y10 through Y5 and Z10 through Z5	A12
Shafts	
a14 through a9 and b14 through b9	A13
c13 through c8 and d12 through d7	A14
e11 through e6 and f10 through f5	A15
g9 through g4 and j7 through j5	A16
h16 through h1	A17
js16 through js1	A18
k9 through k4 and m9 through m4	A19
n9 through n4 and p9 through p4	A20
r9 through r4 and s9 through s4	A21
t9 through t4 and u9 through u4	A22
v9 through v4 and x9 through x4	A23
y9 through y4 and z9 through z4	A24

² For first, second and third choice tolerance zones see Figure 2 and Figure 3.

Table A1 Tolerance Zones for Internal (Hole) Dimensions (A14 through A9 and B14 through B9)

Dimensions in mm

BASIC SIZE	A14	A13	A12	A11	A10	A9	B14	B13	B12	B11	B10	B9
OVER 0	+0.520	+0.410	+0.370	+0.330	+0.310	+0.295	+0.390	+0.280	+0.240	+0.200	+0.180	+0.165
TO 3	+0.270	+0.270	+0.270	+0.270	+0.270	+0.270	+0.140	+0.140	+0.140	+0.140	+0.140	+0.140
OVER 3	+0.570	+0.450	+0.390	+0.345	+0.318	+0.300	+0.440	+0.320	+0.260	+0.215	+0.188	+0.170
TO 6	+0.270	+0.270	+0.270	+0.270	+0.270	+0.270	+0.140	+0.140	+0.140	+0.140	+0.140	+0.140
OVER 6	+0.640	+0.500	+0.430	+0.370	+0.338	+0.316	+0.510	+0.370	+0.300	+0.240	+0.208	+0.186
TO 10	+0.280	+0.280	+0.280	+0.280	+0.280	+0.280	+0.150	+0.150	+0.150	+0.150	+0.150	+0.150
OVER 10	+0.720	+0.560	+0.470	+0.400	+0.360	+0.338	+0.580	+0.420	+0.330	+0.260	+0.220	+0.193
TO 14	+0.290	+0.290	+0.290	+0.290	+0.290	+0.290	+0.150	+0.150	+0.150	+0.150	+0.150	+0.150
OVER 14	+0.720	+0.560	+0.470	+0.400	+0.360	+0.333	+0.580	+0.420	+0.330	+0.260	+0.220	+0.193
TO 18	+0.290	+0.290	+0.290	+0.290	+0.290	+0.290	+0.150	+0.150	+0.150	+0.150	+0.150	+0.150
OVER 18	+0.820	+0.630	+0.510	+0.430	+0.384	+0.352	+0.680	+0.490	+0.370	+0.290	+0.244	+0.212
TO 24	+0.300	+0.300	+0.300	+0.300	+0.300	+0.300	+0.160	+0.160	+0.160	+0.160	+0.160	+0.160
OVER 24	+0.820	+0.630	+0.510	+0.430	+0.384	+0.352	+0.680	+0.490	+0.370	+0.290	+0.244	+0.212
TO 30	+0.300	+0.300	+0.300	+0.300	+0.300	+0.300	+0.160	+0.160	+0.160	+0.160	+0.160	+0.160
OVER 30	+0.930	+0.700	+0.560	+0.470	+0.410	+0.372	+0.790	+0.560	+0.420	+0.330	+0.270	+0.232
TO 40	+0.310	+0.310	+0.310	+0.310	+0.310	+0.310	+0.170	+0.170	+0.170	+0.170	+0.170	+0.170
OVER 40	+0.940	+0.710	+0.570	+0.480	+0.420	+0.382	+0.800	+0.570	+0.430	+0.340	+0.280	+0.242
TO 50	+0.320	+0.320	+0.320	+0.320	+0.320	+0.320	+0.180	+0.180	+0.180	+0.180	+0.180	+0.180
OVER 50	+1.080	+0.800	+0.640	+0.530	+0.460	+0.414	+0.930	+0.650	+0.490	+0.380	+0.310	+0.264
TO 65	+0.340	+0.340	+0.340	+0.340	+0.340	+0.340	+0.190	+0.190	+0.190	+0.190	+0.190	+0.190
OVER 65	+1.100	+0.820	+0.660	+0.550	+0.480	+0.434	+0.940	+0.660	+0.500	+0.390	+0.320	+0.274
TO 80	+0.360	+0.360	+0.360	+0.360	+0.360	+0.360	+0.200	+0.200	+0.200	+0.200	+0.200	+0.200
OVER 80	+1.250	+0.920	+0.730	+0.600	+0.520	+0.467	+1.090	+0.760	+0.570	+0.440	+0.360	+0.307
TO 100	+0.380	+0.380	+0.380	+0.380	+0.380	+0.380	+0.220	+0.220	+0.220	+0.220	+0.220	+0.220
OVER 100	+1.280	+0.950	+0.760	+0.630	+0.550	+0.497	+1.110	+0.780	+0.590	+0.460	+0.380	+0.327
TO 120	+0.410	+0.410	+0.410	+0.410	+0.410	+0.410	+0.240	+0.240	+0.240	+0.240	+0.240	+0.240
OVER 120	+1.460	+1.090	+0.860	+0.710	+0.620	+0.560	+1.260	+0.890	+0.660	+0.510	+0.420	+0.360
TO 140	+0.460	+0.460	+0.460	+0.460	+0.460	+0.460	+0.260	+0.260	+0.260	+0.260	+0.260	+0.260
OVER 140	+1.520	+1.150	+0.920	+0.770	+0.680	+0.620	+1.280	+0.910	+0.680	+0.530	+0.440	+0.380
TO 160	+0.520	+0.520	+0.520	+0.520	+0.520	+0.520	+0.280	+0.280	+0.280	+0.280	+0.280	+0.280
OVER 160	+1.580	+1.210	+0.980	+0.830	+0.740	+0.680	+1.310	+0.940	+0.710	+0.560	+0.470	+0.410
TO 180	+0.580	+0.580	+0.580	+0.580	+0.580	+0.580	+0.310	+0.310	+0.310	+0.310	+0.310	+0.310
OVER 180	+1.810	+1.380	+1.120	+0.950	+0.845	+0.775	+1.490	+1.060	+0.800	+0.630	+0.525	+0.455
TO 200	+0.660	+0.660	+0.660	+0.660	+0.660	+0.660	+0.340	+0.340	+0.340	+0.340	+0.340	+0.340
OVER 200	+1.890	+1.460	+1.200	+1.030	+0.925	+0.855	+1.530	+1.100	+0.840	+0.670	+0.565	+0.495
TO 225	+0.740	+0.740	+0.740	+0.740	+0.740	+0.740	+0.380	+0.380	+0.380	+0.380	+0.380	+0.380
OVER 225	+1.970	+1.540	+1.280	+1.110	+1.005	+0.935	+1.570	+1.140	+0.880	+0.710	+0.605	+0.535
TO 250	+0.820	+0.820	+0.820	+0.820	+0.820	+0.820	+0.420	+0.420	+0.420	+0.420	+0.420	+0.420
OVER 250	+2.220	+1.730	+1.440	+1.240	+1.130	+1.050	+1.780	+1.290	+1.000	+0.800	+0.690	+0.610
TO 280	+0.920	+0.920	+0.920	+0.920	+0.920	+0.920	+0.480	+0.480	+0.480	+0.480	+0.480	+0.480
OVER 280	+2.350	+1.860	+1.570	+1.370	+1.260	+1.180	+1.840	+1.350	+1.060	+0.860	+0.750	+0.670
TO 315	+1.050	+1.050	+1.050	+1.050	+1.050	+1.050	+0.540	+0.540	+0.540	+0.540	+0.540	+0.540
OVER 315	+2.600	+2.090	+1.770	+1.560	+1.430	+1.340	+2.000	+1.490	+1.170	+0.960	+0.830	+0.740
TO 355	+1.200	+1.200	+1.200	+1.200	+1.200	+1.200	+0.600	+0.600	+0.600	+0.600	+0.600	+0.600
OVER 355	+2.750	+2.240	+1.920	+1.710	+1.580	+1.490	+2.080	+1.570	+1.250	+1.040	+0.910	+0.820
TO 400	+1.350	+1.350	+1.350	+1.350	+1.350	+1.350	+0.680	+0.680	+0.680	+0.680	+0.680	+0.680
OVER 400	+3.050	+2.470	+2.130	+1.900	+1.750	+1.655	+2.310	+1.730	+1.390	+1.160	+1.010	+0.915
TO 450	+1.500	+1.500	+1.500	+1.500	+1.500	+1.500	+0.760	+0.760	+0.760	+0.760	+0.760	+0.760
OVER 450	+3.200	+2.620	+2.280	+2.050	+1.900	+1.805	+2.390	+1.810	+1.470	+1.240	+1.090	+0.995
TO 500	+1.650	+1.650	+1.650	+1.650	+1.650	+1.650	+0.840	+0.840	+0.840	+0.840	+0.840	+0.840

Table A2 Tolerance Zones for Internal (Hole) Dimensions (C13 through C8 and D12 through D7)

Dimensions in mm

BASIC SIZE	C13	C12	C11	C10	C9	C8	D12	D11	D10	D9	D8	D7
OVER 0 TØ 3	+0.200 +0.060	+0.160 +0.060	+0.120 +0.060	+0.100 +0.060	+0.085 +0.060	+0.074 +0.060	+0.120 +0.020	+0.080 +0.020	+0.060 +0.020	+0.045 +0.020	+0.034 +0.020	+0.030 +0.020
OVER 3 TØ 6	+0.250 +0.070	+0.190 +0.070	+0.145 +0.070	+0.118 +0.070	+0.100 +0.070	+0.088 +0.070	+0.150 +0.030	+0.105 +0.030	+0.078 +0.030	+0.060 +0.030	+0.048 +0.030	+0.042 +0.030
OVER 6 TØ 10	+0.300 +0.080	+0.230 +0.080	+0.170 +0.080	+0.138 +0.080	+0.116 +0.080	+0.102 +0.080	+0.190 +0.040	+0.130 +0.040	+0.098 +0.040	+0.076 +0.040	+0.062 +0.040	+0.055 +0.040
OVER 10 TØ 14	+0.365 +0.095	+0.275 +0.095	+0.205 +0.095	+0.165 +0.095	+0.138 +0.095	+0.122 +0.095	+0.230 +0.050	+0.160 +0.050	+0.120 +0.050	+0.093 +0.050	+0.077 +0.050	+0.068 +0.050
OVER 14 TØ 18	+0.365 +0.095	+0.275 +0.095	+0.205 +0.095	+0.165 +0.095	+0.138 +0.095	+0.122 +0.095	+0.230 +0.050	+0.160 +0.050	+0.120 +0.050	+0.093 +0.050	+0.077 +0.050	+0.068 +0.050
OVER 18 TØ 24	+0.440 +0.110	+0.320 +0.110	+0.240 +0.110	+0.194 +0.110	+0.162 +0.110	+0.143 +0.110	+0.275 +0.065	+0.195 +0.065	+0.149 +0.065	+0.117 +0.065	+0.098 +0.065	+0.086 +0.065
OVER 24 TØ 30	+0.440 +0.110	+0.320 +0.110	+0.240 +0.110	+0.194 +0.110	+0.162 +0.110	+0.143 +0.110	+0.275 +0.065	+0.195 +0.065	+0.149 +0.065	+0.117 +0.065	+0.098 +0.065	+0.086 +0.065
OVER 30 TØ 40	+0.510 +0.120	+0.370 +0.120	+0.280 +0.120	+0.220 +0.120	+0.182 +0.120	+0.159 +0.120	+0.330 +0.080	+0.240 +0.080	+0.180 +0.080	+0.142 +0.080	+0.119 +0.080	+0.105 +0.080
OVER 40 TØ 50	+0.520 +0.130	+0.380 +0.130	+0.290 +0.130	+0.230 +0.130	+0.192 +0.130	+0.169 +0.130	+0.330 +0.080	+0.240 +0.080	+0.180 +0.080	+0.142 +0.080	+0.119 +0.080	+0.105 +0.080
OVER 50 TØ 65	+0.600 +0.140	+0.440 +0.140	+0.330 +0.140	+0.260 +0.140	+0.214 +0.140	+0.186 +0.140	+0.400 +0.100	+0.290 +0.100	+0.220 +0.100	+0.174 +0.100	+0.146 +0.100	+0.130 +0.100
OVER 65 TØ 80	+0.610 +0.150	+0.450 +0.150	+0.340 +0.150	+0.270 +0.150	+0.224 +0.150	+0.196 +0.150	+0.400 +0.100	+0.290 +0.100	+0.220 +0.100	+0.174 +0.100	+0.146 +0.100	+0.130 +0.100
OVER 80 TØ 100	+0.710 +0.170	+0.520 +0.170	+0.390 +0.170	+0.310 +0.170	+0.257 +0.170	+0.224 +0.170	+0.470 +0.120	+0.340 +0.120	+0.260 +0.120	+0.207 +0.120	+0.174 +0.120	+0.155 +0.120
OVER 100 TØ 120	+0.720 +0.180	+0.530 +0.180	+0.400 +0.180	+0.320 +0.180	+0.267 +0.180	+0.234 +0.180	+0.470 +0.120	+0.340 +0.120	+0.260 +0.120	+0.207 +0.120	+0.174 +0.120	+0.155 +0.120
OVER 120 TØ 140	+0.830 +0.200	+0.600 +0.200	+0.450 +0.200	+0.360 +0.200	+0.300 +0.200	+0.263 +0.200	+0.545 +0.145	+0.395 +0.145	+0.305 +0.145	+0.245 +0.145	+0.208 +0.145	+0.185 +0.145
OVER 140 TØ 160	+0.840 +0.210	+0.610 +0.210	+0.460 +0.210	+0.370 +0.210	+0.310 +0.210	+0.273 +0.210	+0.545 +0.145	+0.395 +0.145	+0.305 +0.145	+0.245 +0.145	+0.208 +0.145	+0.185 +0.145
OVER 160 TØ 180	+0.860 +0.230	+0.630 +0.230	+0.480 +0.230	+0.390 +0.230	+0.330 +0.230	+0.293 +0.230	+0.545 +0.145	+0.395 +0.145	+0.305 +0.145	+0.245 +0.145	+0.208 +0.145	+0.185 +0.145
OVER 180 TØ 200	+0.960 +0.240	+0.700 +0.240	+0.530 +0.240	+0.425 +0.240	+0.355 +0.240	+0.312 +0.240	+0.630 +0.170	+0.460 +0.170	+0.355 +0.170	+0.285 +0.170	+0.242 +0.170	+0.216 +0.170
OVER 200 TØ 225	+0.980 +0.260	+0.720 +0.260	+0.550 +0.260	+0.445 +0.260	+0.375 +0.260	+0.332 +0.260	+0.630 +0.170	+0.460 +0.170	+0.355 +0.170	+0.285 +0.170	+0.242 +0.170	+0.216 +0.170
OVER 225 TØ 250	+1.000 +0.280	+0.740 +0.280	+0.570 +0.280	+0.465 +0.280	+0.395 +0.280	+0.352 +0.280	+0.630 +0.170	+0.460 +0.170	+0.355 +0.170	+0.285 +0.170	+0.242 +0.170	+0.216 +0.170
OVER 250 TØ 280	+1.110 +0.300	+0.820 +0.300	+0.620 +0.300	+0.510 +0.300	+0.430 +0.300	+0.381 +0.300	+0.710 +0.190	+0.510 +0.190	+0.400 +0.190	+0.320 +0.190	+0.271 +0.190	+0.242 +0.190
OVER 280 TØ 315	+1.140 +0.330	+0.850 +0.330	+0.650 +0.330	+0.540 +0.330	+0.460 +0.330	+0.411 +0.330	+0.710 +0.190	+0.510 +0.190	+0.400 +0.190	+0.320 +0.190	+0.271 +0.190	+0.242 +0.190
OVER 315 TØ 355	+1.250 +0.360	+0.930 +0.360	+0.720 +0.360	+0.590 +0.360	+0.500 +0.360	+0.449 +0.360	+0.780 +0.210	+0.570 +0.210	+0.440 +0.210	+0.350 +0.210	+0.299 +0.210	+0.267 +0.210
OVER 355 TØ 400	+1.290 +0.400	+0.970 +0.400	+0.760 +0.400	+0.630 +0.400	+0.540 +0.400	+0.489 +0.400	+0.780 +0.210	+0.570 +0.210	+0.440 +0.210	+0.350 +0.210	+0.299 +0.210	+0.267 +0.210
OVER 400 TØ 450	+1.410 +0.440	+1.070 +0.440	+0.840 +0.440	+0.690 +0.440	+0.595 +0.440	+0.537 +0.440	+0.860 +0.230	+0.630 +0.230	+0.480 +0.230	+0.385 +0.230	+0.327 +0.230	+0.293 +0.230
OVER 450 TØ 500	+1.450 +0.480	+1.110 +0.480	+0.880 +0.480	+0.730 +0.480	+0.635 +0.480	+0.577 +0.480	+0.860 +0.230	+0.630 +0.230	+0.480 +0.230	+0.385 +0.230	+0.327 +0.230	+0.293 +0.230

Table A3 Tolerance Zones for Internal (Hole) Dimensions (E12 through E7 and F11 through F6)

Dimensions in mm

BASIC SIZE		E12	E11	E10	E9	E8	E7	F11	F10	F9	F8	F7	F6
OVER	0	+0.114	+0.074	+0.054	+0.039	+0.028	+0.024	+0.066	+0.046	+0.031	+0.020	+0.016	+0.012
TO	3	+0.014	+0.014	+0.014	+0.014	+0.014	+0.014	+0.006	+0.006	+0.006	+0.006	+0.006	+0.006
OVER	3	+0.140	+0.095	+0.068	+0.050	+0.038	+0.032	+0.085	+0.058	+0.040	+0.028	+0.022	+0.018
TO	6	+0.020	+0.020	+0.020	+0.020	+0.020	+0.020	+0.010	+0.010	+0.010	+0.010	+0.010	+0.010
OVER	6	+0.175	+0.115	+0.083	+0.061	+0.047	+0.040	+0.103	+0.071	+0.049	+0.035	+0.028	+0.022
TO	10	+0.025	+0.025	+0.025	+0.025	+0.025	+0.025	+0.013	+0.013	+0.013	+0.013	+0.013	+0.013
OVER	10	+0.212	+0.142	+0.102	+0.075	+0.059	+0.050	+0.126	+0.086	+0.059	+0.043	+0.034	+0.027
TO	14	+0.032	+0.032	+0.032	+0.032	+0.032	+0.032	+0.016	+0.016	+0.016	+0.016	+0.016	+0.016
OVER	14	+0.212	+0.142	+0.102	+0.075	+0.059	+0.050	+0.126	+0.086	+0.059	+0.043	+0.034	+0.027
TO	18	+0.032	+0.032	+0.032	+0.032	+0.032	+0.032	+0.016	+0.016	+0.016	+0.016	+0.016	+0.016
OVER	18	+0.250	+0.170	+0.124	+0.092	+0.073	+0.061	+0.150	+0.104	+0.072	+0.053	+0.041	+0.033
TO	24	+0.040	+0.040	+0.040	+0.040	+0.040	+0.040	+0.020	+0.020	+0.020	+0.020	+0.020	+0.020
OVER	24	+0.250	+0.170	+0.124	+0.092	+0.073	+0.061	+0.150	+0.104	+0.072	+0.053	+0.041	+0.033
TO	30	+0.040	+0.040	+0.040	+0.040	+0.040	+0.040	+0.020	+0.020	+0.020	+0.020	+0.020	+0.020
OVER	30	+0.300	+0.210	+0.150	+0.112	+0.089	+0.075	+0.185	+0.125	+0.087	+0.064	+0.050	+0.041
TO	40	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.025	+0.025	+0.025	+0.025	+0.025	+0.025
OVER	40	+0.300	+0.210	+0.150	+0.112	+0.089	+0.075	+0.185	+0.125	+0.087	+0.064	+0.050	+0.041
TO	50	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.025	+0.025	+0.025	+0.025	+0.025	+0.025
OVER	50	+0.360	+0.250	+0.180	+0.134	+0.106	+0.090	+0.220	+0.150	+0.104	+0.076	+0.060	+0.049
TO	65	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.030	+0.030	+0.030	+0.030	+0.030	+0.030
OVER	65	+0.360	+0.250	+0.180	+0.134	+0.106	+0.090	+0.220	+0.150	+0.104	+0.076	+0.060	+0.049
TO	80	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.030	+0.030	+0.030	+0.030	+0.030	+0.030
OVER	80	+0.422	+0.292	+0.212	+0.159	+0.126	+0.107	+0.256	+0.176	+0.123	+0.090	+0.071	+0.058
TO	100	+0.072	+0.072	+0.072	+0.072	+0.072	+0.072	+0.036	+0.036	+0.036	+0.036	+0.036	+0.036
OVER	100	+0.422	+0.292	+0.212	+0.159	+0.126	+0.107	+0.256	+0.176	+0.123	+0.090	+0.071	+0.058
TO	120	+0.072	+0.072	+0.072	+0.072	+0.072	+0.072	+0.036	+0.036	+0.036	+0.036	+0.036	+0.036
OVER	120	+0.485	+0.335	+0.245	+0.185	+0.148	+0.125	+0.293	+0.203	+0.143	+0.106	+0.083	+0.068
TO	140	+0.085	+0.085	+0.085	+0.085	+0.085	+0.085	+0.043	+0.043	+0.043	+0.043	+0.043	+0.043
OVER	140	+0.485	+0.335	+0.245	+0.185	+0.148	+0.125	+0.293	+0.203	+0.143	+0.106	+0.083	+0.068
TO	160	+0.085	+0.085	+0.085	+0.085	+0.085	+0.085	+0.043	+0.043	+0.043	+0.043	+0.043	+0.043
OVER	160	+0.485	+0.335	+0.245	+0.185	+0.148	+0.125	+0.293	+0.203	+0.143	+0.106	+0.083	+0.068
TO	180	+0.085	+0.085	+0.085	+0.085	+0.085	+0.085	+0.043	+0.043	+0.043	+0.043	+0.043	+0.043
OVER	180	+0.560	+0.390	+0.285	+0.215	+0.172	+0.146	+0.340	+0.235	+0.165	+0.122	+0.096	+0.079
TO	200	+0.100	+0.100	+0.100	+0.100	+0.100	+0.100	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050
OVER	200	+0.560	+0.390	+0.285	+0.215	+0.172	+0.146	+0.340	+0.235	+0.165	+0.122	+0.096	+0.079
TO	225	+0.100	+0.100	+0.100	+0.100	+0.100	+0.100	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050
OVER	225	+0.560	+0.390	+0.285	+0.215	+0.172	+0.146	+0.340	+0.235	+0.165	+0.122	+0.096	+0.079
TO	250	+0.100	+0.100	+0.100	+0.100	+0.100	+0.100	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050
OVER	250	+0.630	+0.430	+0.320	+0.240	+0.191	+0.162	+0.376	+0.266	+0.186	+0.137	+0.108	+0.088
TO	280	+0.110	+0.110	+0.110	+0.110	+0.110	+0.110	+0.056	+0.056	+0.056	+0.056	+0.056	+0.056
OVER	280	+0.630	+0.430	+0.320	+0.240	+0.191	+0.162	+0.376	+0.266	+0.186	+0.137	+0.108	+0.088
TO	315	+0.110	+0.110	+0.110	+0.110	+0.110	+0.110	+0.056	+0.056	+0.056	+0.056	+0.056	+0.056
OVER	315	+0.695	+0.485	+0.355	+0.265	+0.214	+0.182	+0.422	+0.292	+0.202	+0.151	+0.119	+0.098
TO	355	+0.125	+0.125	+0.125	+0.125	+0.125	+0.125	+0.062	+0.062	+0.062	+0.062	+0.062	+0.062
OVER	355	+0.695	+0.485	+0.355	+0.265	+0.214	+0.182	+0.422	+0.292	+0.202	+0.151	+0.119	+0.098
TO	400	+0.125	+0.125	+0.125	+0.125	+0.125	+0.125	+0.062	+0.062	+0.062	+0.062	+0.062	+0.062
OVER	400	+0.765	+0.535	+0.385	+0.290	+0.232	+0.198	+0.468	+0.318	+0.223	+0.165	+0.131	+0.108
TO	450	+0.135	+0.135	+0.135	+0.135	+0.135	+0.135	+0.068	+0.068	+0.068	+0.068	+0.068	+0.068
OVER	450	+0.765	+0.535	+0.385	+0.290	+0.232	+0.198	+0.468	+0.318	+0.223	+0.165	+0.131	+0.108
TO	500	+0.135	+0.135	+0.135	+0.135	+0.135	+0.135	+0.068	+0.068	+0.068	+0.068	+0.068	+0.068

Table A4 Tolerance Zones for Internal (Hole) Dimensions (G10 through G5 and J8 through J6)

Dimensions in mm

BASIC SIZE	G10	G9	G8	G7	G6	G5	J8	J7	J6
OVER 0	+0.042	+0.027	+0.016	+0.012	+0.008	+0.006	+0.006	+0.004	+0.002
TO 3	+0.002	+0.002	+0.002	+0.002	+0.002	+0.002	-0.008	-0.006	-0.004
OVER 3	+0.052	+0.034	+0.022	+0.016	+0.012	+0.009	+0.010	+0.006	+0.005
TO 6	+0.004	+0.004	+0.004	+0.004	+0.004	+0.004	-0.008	-0.006	-0.003
OVER 6	+0.063	+0.041	+0.027	+0.020	+0.014	+0.011	+0.012	+0.008	+0.005
TO 10	+0.005	+0.005	+0.005	+0.005	+0.005	+0.005	-0.010	-0.007	-0.004
OVER 10	+0.076	+0.049	+0.033	+0.024	+0.017	+0.014	+0.015	+0.010	+0.006
TO 14	+0.006	+0.006	+0.006	+0.006	+0.006	+0.006	-0.012	-0.008	-0.005
OVER 14	+0.076	+0.049	+0.033	+0.024	+0.017	+0.014	+0.015	+0.010	+0.006
TO 18	+0.006	+0.006	+0.006	+0.006	+0.006	+0.006	-0.012	-0.008	-0.005
OVER 18	+0.091	+0.059	+0.040	+0.028	+0.020	+0.016	+0.020	+0.012	+0.008
TO 24	+0.007	+0.007	+0.007	+0.007	+0.007	+0.007	-0.013	-0.009	-0.005
OVER 24	+0.091	+0.059	+0.040	+0.028	+0.020	+0.016	+0.020	+0.012	+0.008
TO 30	+0.007	+0.007	+0.007	+0.007	+0.007	+0.007	-0.013	-0.009	-0.005
OVER 30	+0.109	+0.071	+0.048	+0.034	+0.025	+0.020	+0.024	+0.014	+0.010
TO 40	+0.009	+0.009	+0.009	+0.009	+0.009	+0.009	-0.015	-0.011	-0.006
OVER 40	+0.109	+0.071	+0.048	+0.034	+0.025	+0.020	+0.024	+0.014	+0.010
TO 50	+0.009	+0.009	+0.009	+0.009	+0.009	+0.009	-0.015	-0.011	-0.006
OVER 50	+0.130	+0.084	+0.056	+0.040	+0.029	+0.023	+0.028	+0.018	+0.013
TO 65	+0.010	+0.010	+0.010	+0.010	+0.010	+0.010	-0.018	-0.012	-0.006
OVER 65	+0.130	+0.084	+0.056	+0.040	+0.029	+0.023	+0.028	+0.018	+0.013
TO 80	+0.010	+0.010	+0.010	+0.010	+0.010	+0.010	-0.018	-0.012	-0.006
OVER 80	+0.152	+0.099	+0.066	+0.047	+0.034	+0.027	+0.034	+0.022	+0.016
TO 100	+0.012	+0.012	+0.012	+0.012	+0.012	+0.012	-0.020	-0.013	-0.006
OVER 100	+0.152	+0.099	+0.066	+0.047	+0.034	+0.027	+0.034	+0.022	+0.016
TO 120	+0.012	+0.012	+0.012	+0.012	+0.012	+0.012	-0.020	-0.013	-0.006
OVER 120	+0.174	+0.114	+0.077	+0.054	+0.039	+0.032	+0.041	+0.026	+0.018
TO 140	+0.014	+0.014	+0.014	+0.014	+0.014	+0.014	-0.022	-0.014	-0.007
OVER 140	+0.174	+0.114	+0.077	+0.054	+0.039	+0.032	+0.041	+0.026	+0.018
TO 160	+0.014	+0.014	+0.014	+0.014	+0.014	+0.014	-0.022	-0.014	-0.007
OVER 160	+0.174	+0.114	+0.077	+0.054	+0.039	+0.032	+0.041	+0.026	+0.018
TO 180	+0.014	+0.014	+0.014	+0.014	+0.014	+0.014	-0.022	-0.014	-0.007
OVER 180	+0.200	+0.130	+0.087	+0.061	+0.044	+0.035	+0.047	+0.030	+0.022
TO 200	+0.015	+0.015	+0.015	+0.015	+0.015	+0.015	-0.025	-0.016	-0.007
OVER 200	+0.200	+0.130	+0.087	+0.061	+0.044	+0.035	+0.047	+0.030	+0.022
TO 225	+0.015	+0.015	+0.015	+0.015	+0.015	+0.015	-0.025	-0.016	-0.007
OVER 225	+0.200	+0.130	+0.087	+0.061	+0.044	+0.035	+0.047	+0.030	+0.022
TO 250	+0.015	+0.015	+0.015	+0.015	+0.015	+0.015	-0.025	-0.016	-0.007
OVER 250	+0.227	+0.147	+0.098	+0.069	+0.049	+0.040	+0.055	+0.036	+0.025
TO 280	+0.017	+0.017	+0.017	+0.017	+0.017	+0.017	-0.026	-0.016	-0.007
OVER 280	+0.227	+0.147	+0.098	+0.069	+0.049	+0.040	+0.055	+0.036	+0.025
TO 315	+0.017	+0.017	+0.017	+0.017	+0.017	+0.017	-0.026	-0.016	-0.007
OVER 315	+0.248	+0.158	+0.107	+0.075	+0.054	+0.043	+0.060	+0.039	+0.029
TO 355	+0.018	+0.018	+0.018	+0.018	+0.018	+0.018	-0.029	-0.018	-0.007
OVER 355	+0.248	+0.158	+0.107	+0.075	+0.054	+0.043	+0.060	+0.039	+0.029
TO 400	+0.018	+0.018	+0.018	+0.018	+0.018	+0.018	-0.029	-0.018	-0.007
OVER 400	+0.270	+0.175	+0.117	+0.083	+0.060	+0.047	+0.066	+0.043	+0.033
TO 450	+0.020	+0.020	+0.020	+0.020	+0.020	+0.020	-0.031	-0.020	-0.007
OVER 450	+0.270	+0.175	+0.117	+0.083	+0.060	+0.047	+0.066	+0.043	+0.033
TO 500	+0.020	+0.020	+0.020	+0.020	+0.020	+0.020	-0.031	-0.020	-0.007

Table A5 Tolerance Zones for Internal (Hole) Dimensions (H16 through H1)

Dimensions in mm

BASIC SIZE		H16	H15	H14	H13	H12	H11	H10	H9	H8	H7	H6	H5	H4	H3	H2	H1
		OVER	0	+0.600	+0.400	+0.250	+0.140	+0.100	+0.060	+0.040	+0.025	+0.014	+0.010	+0.006	+0.004	+0.003	+0.002
TS	3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000	0.0000
OVER	3	+0.750	+0.480	+0.300	+0.180	+0.120	+0.075	+0.048	+0.030	+0.018	+0.012	+0.008	+0.005	+0.004	+0.0025	+0.0015	+0.001
TS	6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000	0.0000	0.000
OVER	6	+0.900	+0.580	+0.360	+0.220	+0.150	+0.090	+0.058	+0.036	+0.022	+0.015	+0.009	+0.006	+0.004	+0.0025	+0.0015	+0.001
TS	10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000	0.0000	0.000
OVER	10	+1.100	+0.700	+0.430	+0.270	+0.180	+0.110	+0.070	+0.043	+0.027	+0.018	+0.011	+0.008	+0.005	+0.003	+0.002	+0.0012
TS	14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	14	+1.100	+0.700	+0.430	+0.270	+0.180	+0.110	+0.070	+0.043	+0.027	+0.018	+0.011	+0.008	+0.005	+0.003	+0.002	+0.0012
TS	18	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	18	+1.300	+0.840	+0.520	+0.330	+0.210	+0.130	+0.084	+0.052	+0.033	+0.021	+0.013	+0.009	+0.006	+0.004	+0.0025	+0.0015
TS	24	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000	0.0000	0.0000
OVER	24	+1.300	+0.840	+0.520	+0.330	+0.210	+0.130	+0.084	+0.052	+0.033	+0.021	+0.013	+0.009	+0.006	+0.004	+0.0025	+0.0015
TS	30	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000	0.0000
OVER	30	+1.600	+1.000	+0.620	+0.390	+0.250	+0.160	+0.100	+0.062	+0.039	+0.025	+0.016	+0.011	+0.007	+0.004	+0.0025	+0.0015
TS	40	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000	0.0000	0.0000
OVER	40	+1.600	+1.000	+0.620	+0.390	+0.250	+0.160	+0.100	+0.062	+0.039	+0.025	+0.016	+0.011	+0.007	+0.004	+0.0025	+0.0015
TS	50	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000	0.0000
OVER	50	+1.900	+1.200	+0.740	+0.460	+0.300	+0.190	+0.120	+0.074	+0.046	+0.030	+0.019	+0.013	+0.008	+0.005	+0.003	+0.002
TS	65	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
OVER	65	+1.900	+1.200	+0.740	+0.460	+0.300	+0.190	+0.120	+0.074	+0.046	+0.030	+0.019	+0.013	+0.008	+0.005	+0.003	+0.002
TS	80	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
OVER	80	+2.200	+1.400	+0.870	+0.540	+0.350	+0.220	+0.140	+0.087	+0.054	+0.035	+0.022	+0.015	+0.010	+0.006	+0.004	+0.0025
TS	100	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	100	+2.200	+1.400	+0.870	+0.540	+0.350	+0.220	+0.140	+0.087	+0.054	+0.035	+0.022	+0.015	+0.010	+0.006	+0.004	+0.0025
TS	120	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	120	+2.500	+1.600	+1.000	+0.630	+0.400	+0.250	+0.160	+0.100	+0.063	+0.040	+0.025	+0.018	+0.012	+0.008	+0.005	+0.0035
TS	140	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	140	+2.500	+1.600	+1.000	+0.630	+0.400	+0.250	+0.160	+0.100	+0.063	+0.040	+0.025	+0.018	+0.012	+0.008	+0.005	+0.0035
TS	160	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	160	+2.500	+1.600	+1.000	+0.630	+0.400	+0.250	+0.160	+0.100	+0.063	+0.040	+0.025	+0.018	+0.012	+0.008	+0.005	+0.0035
TS	180	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	180	+2.900	+1.850	+1.150	+0.720	+0.460	+0.290	+0.185	+0.115	+0.072	+0.046	+0.029	+0.020	+0.014	+0.010	+0.007	+0.0045
TS	200	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	200	+2.900	+1.850	+1.150	+0.720	+0.460	+0.290	+0.185	+0.115	+0.072	+0.046	+0.029	+0.020	+0.014	+0.010	+0.007	+0.0045
TS	225	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	225	+2.900	+1.850	+1.150	+0.720	+0.460	+0.290	+0.185	+0.115	+0.072	+0.046	+0.029	+0.020	+0.014	+0.010	+0.007	+0.0045
TS	250	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.0000
OVER	250	+3.200	+2.100	+1.300	+0.810	+0.520	+0.320	+0.210	+0.130	+0.081	+0.052	+0.032	+0.023	+0.016	+0.012	+0.008	+0.006
TS	280	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
OVER	280	+3.200	+2.100	+1.300	+0.810	+0.520	+0.320	+0.210	+0.130	+0.081	+0.052	+0.032	+0.023	+0.016	+0.012	+0.008	+0.006
TS	315	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
OVER	315	+3.600	+2.300	+1.400	+0.890	+0.570	+0.360	+0.230	+0.140	+0.089	+0.057	+0.036	+0.025	+0.018	+0.013	+0.009	+0.007
TS	355	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
OVER	355	+3.600	+2.300	+1.400	+0.890	+0.570	+0.360	+0.230	+0.140	+0.089	+0.057	+0.036	+0.025	+0.018	+0.013	+0.009	+0.007
TS	400	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
OVER	400	+4.000	+2.500	+1.550	+0.970	+0.630	+0.400	+0.250	+0.155	+0.097	+0.063	+0.040	+0.027	+0.020	+0.015	+0.010	+0.008
TS	450	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
OVER	450	+4.000	+2.500	+1.550	+0.970	+0.630	+0.400	+0.250	+0.155	+0.097	+0.063	+0.040	+0.027	+0.020	+0.015	+0.010	+0.008
TS	500	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table A6 Tolerance Zones for Internal (Hole) Dimensions (JS16 through JS1)

Dimensions in mm

BASIC SIZE	JS16	JS15	JS14	JS13	JS12	JS11	JS10	JS9	JS8	JS7	JS6	JS5	JS4	JS3	JS2	JS1
OVER 0 TO 3	+0.300 -0.300	+0.200 -0.200	+0.125 -0.125	+0.070 -0.070	+0.050 -0.050	+0.030 -0.030	+0.020 -0.020	+0.012 -0.012	+0.007 -0.007	+0.005 -0.005	+0.003 -0.003	+0.002 -0.002	+0.0015 -0.0015	+0.001 -0.001	+0.0006 -0.0006	+0.0004 -0.0004
OVER 3 TO 6	+0.375 -0.375	+0.240 -0.240	+0.150 -0.150	+0.090 -0.090	+0.060 -0.060	+0.037 -0.037	+0.024 -0.024	+0.015 -0.015	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075	+0.0005 -0.0005
OVER 6 TO 10	+0.450 -0.450	+0.290 -0.290	+0.180 -0.180	+0.110 -0.110	+0.075 -0.075	+0.045 -0.045	+0.029 -0.029	+0.018 -0.018	+0.011 -0.011	+0.007 -0.007	+0.0045 -0.0045	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075	+0.0005 -0.0005
OVER 10 TO 14	+0.550 -0.550	+0.350 -0.350	+0.215 -0.215	+0.135 -0.135	+0.090 -0.090	+0.055 -0.055	+0.035 -0.035	+0.021 -0.021	+0.013 -0.013	+0.009 -0.009	+0.0055 -0.0055	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001	+0.0006 -0.0006
OVER 14 TO 18	+0.550 -0.550	+0.350 -0.350	+0.215 -0.215	+0.135 -0.135	+0.090 -0.090	+0.055 -0.055	+0.035 -0.035	+0.021 -0.021	+0.013 -0.013	+0.009 -0.009	+0.0055 -0.0055	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001	+0.0006 -0.0006
OVER 18 TO 24	+0.650 -0.650	+0.420 -0.420	+0.260 -0.260	+0.165 -0.165	+0.105 -0.105	+0.065 -0.065	+0.042 -0.042	+0.026 -0.026	+0.016 -0.016	+0.010 -0.010	+0.0065 -0.0065	+0.0045 -0.0045	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 24 TO 30	+0.650 -0.650	+0.420 -0.420	+0.260 -0.260	+0.165 -0.165	+0.105 -0.105	+0.065 -0.065	+0.042 -0.042	+0.026 -0.026	+0.016 -0.016	+0.010 -0.010	+0.0065 -0.0065	+0.0045 -0.0045	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 30 TO 40	+0.800 -0.800	+0.500 -0.500	+0.310 -0.310	+0.195 -0.195	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.019 -0.019	+0.012 -0.012	+0.008 -0.008	+0.0055 -0.0055	+0.0035 -0.0035	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 40 TO 50	+0.800 -0.800	+0.500 -0.500	+0.310 -0.310	+0.195 -0.195	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.019 -0.019	+0.012 -0.012	+0.008 -0.008	+0.0055 -0.0055	+0.0035 -0.0035	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 50 TO 65	+0.950 -0.950	+0.600 -0.600	+0.370 -0.370	+0.230 -0.230	+0.150 -0.150	+0.095 -0.095	+0.060 -0.060	+0.037 -0.037	+0.023 -0.023	+0.015 -0.015	+0.0095 -0.0095	+0.0065 -0.0065	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001
OVER 65 TO 80	+0.950 -0.950	+0.600 -0.600	+0.370 -0.370	+0.230 -0.230	+0.150 -0.150	+0.095 -0.095	+0.060 -0.060	+0.037 -0.037	+0.023 -0.023	+0.015 -0.015	+0.0095 -0.0095	+0.0065 -0.0065	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001
OVER 80 TO 100	+1.100 -1.100	+0.700 -0.700	+0.435 -0.435	+0.270 -0.270	+0.175 -0.175	+0.110 -0.110	+0.070 -0.070	+0.043 -0.043	+0.027 -0.027	+0.017 -0.017	+0.011 -0.011	+0.0075 -0.0075	+0.005 -0.005	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125
OVER 100 TO 120	+1.100 -1.100	+0.700 -0.700	+0.435 -0.435	+0.270 -0.270	+0.175 -0.175	+0.110 -0.110	+0.070 -0.070	+0.043 -0.043	+0.027 -0.027	+0.017 -0.017	+0.011 -0.011	+0.0075 -0.0075	+0.005 -0.005	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125
OVER 120 TO 140	+1.250 -1.250	+0.800 -0.800	+0.500 -0.500	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.020 -0.020	+0.0125 -0.0125	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.00175 -0.00175
OVER 140 TO 160	+1.250 -1.250	+0.800 -0.800	+0.500 -0.500	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.020 -0.020	+0.0125 -0.0125	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.00175 -0.00175
OVER 160 TO 180	+1.250 -1.250	+0.800 -0.800	+0.500 -0.500	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.020 -0.020	+0.0125 -0.0125	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.00175 -0.00175
OVER 180 TO 200	+1.450 -1.450	+0.925 -0.925	+0.575 -0.575	+0.360 -0.360	+0.230 -0.230	+0.145 -0.145	+0.092 -0.092	+0.057 -0.057	+0.036 -0.036	+0.023 -0.023	+0.0145 -0.0145	+0.010 -0.010	+0.007 -0.007	+0.005 -0.005	+0.0035 -0.0035	+0.00225 -0.00225
OVER 200 TO 225	+1.450 -1.450	+0.925 -0.925	+0.575 -0.575	+0.360 -0.360	+0.230 -0.230	+0.145 -0.145	+0.092 -0.092	+0.057 -0.057	+0.036 -0.036	+0.023 -0.023	+0.0145 -0.0145	+0.010 -0.010	+0.007 -0.007	+0.005 -0.005	+0.0035 -0.0035	+0.00225 -0.00225
OVER 225 TO 250	+1.450 -1.450	+0.925 -0.925	+0.575 -0.575	+0.360 -0.360	+0.230 -0.230	+0.145 -0.145	+0.092 -0.092	+0.057 -0.057	+0.036 -0.036	+0.023 -0.023	+0.0145 -0.0145	+0.010 -0.010	+0.007 -0.007	+0.005 -0.005	+0.0035 -0.0035	+0.00225 -0.00225
OVER 250 TO 280	+1.600 -1.600	+1.050 -1.050	+0.650 -0.650	+0.405 -0.405	+0.260 -0.260	+0.160 -0.160	+0.105 -0.105	+0.065 -0.065	+0.040 -0.040	+0.026 -0.026	+0.016 -0.016	+0.0115 -0.0115	+0.008 -0.008	+0.006 -0.006	+0.004 -0.004	+0.003 -0.003
OVER 280 TO 315	+1.600 -1.600	+1.050 -1.050	+0.650 -0.650	+0.405 -0.405	+0.260 -0.260	+0.160 -0.160	+0.105 -0.105	+0.065 -0.065	+0.040 -0.040	+0.026 -0.026	+0.016 -0.016	+0.0115 -0.0115	+0.008 -0.008	+0.006 -0.006	+0.004 -0.004	+0.003 -0.003
OVER 315 TO 355	+1.800 -1.800	+1.150 -1.150	+0.700 -0.700	+0.445 -0.445	+0.285 -0.285	+0.180 -0.180	+0.115 -0.115	+0.070 -0.070	+0.044 -0.044	+0.028 -0.028	+0.018 -0.018	+0.0125 -0.0125	+0.009 -0.009	+0.0065 -0.0065	+0.0045 -0.0045	+0.0035 -0.0035
OVER 355 TO 400	+1.800 -1.800	+1.150 -1.150	+0.700 -0.700	+0.445 -0.445	+0.285 -0.285	+0.180 -0.180	+0.115 -0.115	+0.070 -0.070	+0.044 -0.044	+0.028 -0.028	+0.018 -0.018	+0.0125 -0.0125	+0.009 -0.009	+0.0065 -0.0065	+0.0045 -0.0045	+0.0035 -0.0035
OVER 400 TO 450	+2.000 -2.000	+1.250 -1.250	+0.775 -0.775	+0.485 -0.485	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.077 -0.077	+0.048 -0.048	+0.031 -0.031	+0.020 -0.020	+0.0135 -0.0135	+0.010 -0.010	+0.0075 -0.0075	+0.005 -0.005	+0.004 -0.004
OVER 450 TO 500	+2.000 -2.000	+1.250 -1.250	+0.775 -0.775	+0.485 -0.485	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.077 -0.077	+0.048 -0.048	+0.031 -0.031	+0.020 -0.020	+0.0135 -0.0135	+0.010 -0.010	+0.0075 -0.0075	+0.005 -0.005	+0.004 -0.004

Note: Some JS deviations in the grades 7 to 11 have been rounded off to 1/2 (IT - 0.001) when the IT value is odd.

Table A7 Tolerance Zones for Internal (Hole) Dimensions (K10 through K5 and M10 through M5)

Dimensions in mm

BASIC SIZE	K10	K9	K8	K7	K6	K5	M10	M9	M8	M7	M6	M5
OVER 0 TO 3	0.000 -0.040	0.000 -0.025	0.000 -0.014	0.000 -0.010	0.000 -0.006	0.000 -0.004	-0.002 -0.042	-0.002 -0.027	-0.002 -0.016	-0.002 -0.012	-0.002 -0.008	-0.002 -0.006
OVER 3 TO 6	NUMERICAL VALUES FOR TOLERANCE ZONES IN THIS AREA NOT DEFINED		+0.005 -0.013	+0.003 -0.009	+0.002 -0.006	0.000 -0.005	-0.004 -0.052	-0.004 -0.034	+0.002 -0.016	0.000 -0.012	+0.001 -0.009	-0.003 -0.008
OVER 6 TO 10			+0.004 -0.016	+0.005 -0.010	+0.002 -0.007	0.001 -0.005	-0.006 -0.064	-0.006 -0.042	+0.001 -0.021	0.000 -0.015	+0.003 -0.012	-0.004 -0.010
OVER 10 TO 14			+0.008 -0.019	+0.006 -0.012	+0.002 -0.009	0.002 -0.006	-0.007 -0.077	-0.007 -0.050	+0.002 -0.025	0.000 -0.018	+0.004 -0.015	-0.004 -0.012
OVER 14 TO 18			+0.008 -0.019	+0.006 -0.012	+0.002 -0.009	0.002 -0.006	-0.007 -0.077	-0.007 -0.050	+0.002 -0.025	0.000 -0.018	+0.004 -0.015	-0.004 -0.012
OVER 18 TO 24			+0.010 -0.023	+0.006 -0.015	+0.002 -0.011	0.001 -0.008	-0.008 -0.092	-0.008 -0.060	+0.004 -0.029	0.000 -0.021	+0.004 -0.017	-0.005 -0.014
OVER 24 TO 30			+0.010 -0.023	+0.006 -0.015	+0.002 -0.011	0.001 -0.008	-0.008 -0.092	-0.008 -0.060	+0.004 -0.029	0.000 -0.021	+0.004 -0.017	-0.005 -0.014
OVER 30 TO 40			+0.012 -0.027	+0.007 -0.018	+0.003 -0.013	0.002 -0.009	-0.009 -0.109	-0.009 -0.071	+0.005 -0.034	0.000 -0.025	+0.004 -0.020	-0.005 -0.016
OVER 40 TO 50			+0.012 -0.027	+0.007 -0.018	+0.003 -0.013	0.002 -0.009	-0.009 -0.109	-0.009 -0.071	+0.005 -0.034	0.000 -0.025	+0.004 -0.020	-0.005 -0.016
OVER 50 TO 65			+0.014 -0.032	+0.009 -0.021	+0.004 -0.015	0.003 -0.010	-0.011 -0.131	-0.011 -0.085	+0.005 -0.041	0.000 -0.030	+0.005 -0.024	-0.006 -0.019
OVER 65 TO 80			+0.014 -0.032	+0.009 -0.021	+0.004 -0.015	0.003 -0.010	-0.011 -0.131	-0.011 -0.085	+0.005 -0.041	0.000 -0.030	+0.005 -0.024	-0.006 -0.019
OVER 80 TO 100			+0.016 -0.038	+0.010 -0.025	+0.004 -0.018	0.002 -0.013	-0.013 -0.153	-0.013 -0.100	+0.006 -0.048	0.000 -0.035	+0.006 -0.028	-0.008 -0.023
OVER 100 TO 120			+0.016 -0.038	+0.010 -0.025	+0.004 -0.018	0.002 -0.013	-0.013 -0.153	-0.013 -0.100	+0.006 -0.048	0.000 -0.035	+0.006 -0.028	-0.008 -0.023
OVER 120 TO 140			+0.020 -0.043	+0.012 -0.028	+0.004 -0.021	0.003 -0.015	-0.015 -0.175	-0.015 -0.115	+0.008 -0.055	0.000 -0.040	+0.008 -0.033	-0.009 -0.027
OVER 140 TO 160			+0.020 -0.043	+0.012 -0.028	+0.004 -0.021	0.003 -0.015	-0.015 -0.175	-0.015 -0.115	+0.008 -0.055	0.000 -0.040	+0.008 -0.033	-0.009 -0.027
OVER 160 TO 180			+0.020 -0.043	+0.012 -0.028	+0.004 -0.021	0.003 -0.015	-0.015 -0.175	-0.015 -0.115	+0.008 -0.055	0.000 -0.040	+0.008 -0.033	-0.009 -0.027
OVER 180 TO 200			+0.022 -0.050	+0.013 -0.033	+0.005 -0.024	0.002 -0.018	-0.017 -0.202	-0.017 -0.132	+0.009 -0.063	0.000 -0.046	+0.008 -0.037	-0.011 -0.031
OVER 200 TO 225			+0.022 -0.050	+0.013 -0.033	+0.005 -0.024	0.002 -0.018	-0.017 -0.202	-0.017 -0.132	+0.009 -0.063	0.000 -0.046	+0.008 -0.037	-0.011 -0.031
OVER 225 TO 250			+0.022 -0.050	+0.013 -0.033	+0.005 -0.024	0.002 -0.018	-0.017 -0.202	-0.017 -0.132	+0.009 -0.063	0.000 -0.046	+0.008 -0.037	-0.011 -0.031
OVER 250 TO 280	+0.025 -0.056	+0.016 -0.036	+0.005 -0.027	0.003 -0.020	-0.020 -0.230	-0.020 -0.150	+0.009 -0.072	0.000 -0.052	+0.009 -0.041	-0.013 -0.036		
OVER 280 TO 315	+0.025 -0.056	+0.016 -0.036	+0.005 -0.027	0.003 -0.020	-0.020 -0.230	-0.020 -0.150	+0.009 -0.072	0.000 -0.052	+0.009 -0.041	-0.013 -0.036		
OVER 315 TO 355	+0.028 -0.061	+0.017 -0.040	+0.007 -0.029	0.003 -0.022	-0.021 -0.251	-0.021 -0.161	+0.011 -0.078	0.000 -0.057	+0.010 -0.046	-0.014 -0.039		
OVER 355 TO 400	+0.028 -0.061	+0.017 -0.040	+0.007 -0.029	0.003 -0.022	-0.021 -0.251	-0.021 -0.161	+0.011 -0.078	0.000 -0.057	+0.010 -0.046	-0.014 -0.039		
OVER 400 TO 450	+0.029 -0.068	+0.018 -0.045	+0.008 -0.032	0.002 -0.025	-0.023 -0.273	-0.023 -0.178	+0.011 -0.086	0.000 -0.063	+0.010 -0.050	-0.016 -0.043		
OVER 450 TO 500	+0.029 -0.068	+0.018 -0.045	+0.008 -0.032	0.002 -0.025	-0.023 -0.273	-0.023 -0.178	+0.011 -0.086	0.000 -0.063	+0.010 -0.050	-0.016 -0.043		

Table A8 Tolerance Zones for Internal (Hole) Dimensions (N10 through N5 and P10 through P5)

Dimensions in mm

BASIC SIZE	N10	N9	N8	N7	N6	N5	P10	P9	P8	P7	P6	P5
OVER 0 TO 3	-0.004	-0.004	-0.004	-0.004	-0.004	-0.004	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006
OVER 3 TO 6	-0.004	-0.029	-0.018	-0.014	-0.010	-0.008	-0.046	-0.031	-0.020	-0.016	-0.012	-0.010
OVER 6 TO 10	0.000	0.000	-0.002	-0.004	-0.005	-0.007	-0.012	-0.012	-0.012	-0.008	-0.009	-0.011
OVER 10 TO 14	-0.048	-0.030	-0.020	-0.016	-0.013	-0.012	-0.060	-0.042	-0.030	-0.020	-0.017	-0.016
OVER 14 TO 18	0.000	0.000	-0.003	-0.004	-0.007	-0.008	-0.015	-0.015	-0.015	-0.009	-0.012	-0.013
OVER 18 TO 24	-0.058	-0.036	-0.025	-0.019	-0.016	-0.014	-0.073	-0.051	-0.037	-0.024	-0.021	-0.019
OVER 24 TO 30	0.000	0.000	-0.003	-0.005	-0.009	-0.009	-0.018	-0.018	-0.018	-0.011	-0.015	-0.015
OVER 30 TO 40	-0.070	-0.043	-0.030	-0.023	-0.020	-0.017	-0.088	-0.061	-0.045	-0.029	-0.026	-0.023
OVER 40 TO 50	0.000	0.000	-0.003	-0.005	-0.009	-0.009	-0.018	-0.018	-0.018	-0.011	-0.015	-0.015
OVER 50 TO 65	-0.070	-0.043	-0.030	-0.023	-0.020	-0.017	-0.088	-0.061	-0.045	-0.029	-0.026	-0.023
OVER 65 TO 80	0.000	0.000	-0.003	-0.007	-0.011	-0.012	-0.022	-0.022	-0.022	-0.014	-0.018	-0.019
OVER 80 TO 100	-0.084	-0.052	-0.036	-0.028	-0.024	-0.021	-0.106	-0.074	-0.055	-0.035	-0.031	-0.028
OVER 100 TO 120	0.000	0.000	-0.003	-0.007	-0.011	-0.012	-0.022	-0.022	-0.022	-0.014	-0.018	-0.019
OVER 120 TO 140	-0.084	-0.052	-0.036	-0.028	-0.024	-0.021	-0.106	-0.074	-0.055	-0.035	-0.031	-0.028
OVER 140 TO 160	0.000	0.000	-0.003	-0.008	-0.012	-0.013	-0.026	-0.026	-0.026	-0.017	-0.021	-0.022
OVER 160 TO 180	-0.100	-0.062	-0.042	-0.033	-0.028	-0.024	-0.126	-0.088	-0.065	-0.042	-0.037	-0.033
OVER 180 TO 200	0.000	0.000	-0.003	-0.008	-0.012	-0.013	-0.026	-0.026	-0.026	-0.017	-0.021	-0.022
OVER 200 TO 225	-0.100	-0.062	-0.042	-0.033	-0.028	-0.024	-0.126	-0.088	-0.065	-0.042	-0.037	-0.033
OVER 225 TO 250	0.000	0.000	-0.004	-0.009	-0.014	-0.015	-0.032	-0.032	-0.032	-0.021	-0.026	-0.027
OVER 250 TO 280	-0.120	-0.074	-0.050	-0.039	-0.033	-0.028	-0.152	-0.106	-0.078	-0.051	-0.045	-0.040
OVER 280 TO 315	0.000	0.000	-0.004	-0.009	-0.014	-0.015	-0.032	-0.032	-0.032	-0.021	-0.026	-0.027
OVER 315 TO 355	-0.120	-0.074	-0.050	-0.039	-0.033	-0.028	-0.152	-0.106	-0.078	-0.051	-0.045	-0.040
OVER 355 TO 400	0.000	0.000	-0.004	-0.010	-0.016	-0.018	-0.037	-0.037	-0.037	-0.024	-0.030	-0.032
OVER 400 TO 450	-0.140	-0.087	-0.058	-0.045	-0.038	-0.033	-0.177	-0.124	-0.091	-0.059	-0.052	-0.047
OVER 450 TO 500	0.000	0.000	-0.004	-0.010	-0.016	-0.018	-0.037	-0.037	-0.037	-0.024	-0.030	-0.032
OVER 500 TO 550	-0.140	-0.087	-0.058	-0.045	-0.038	-0.033	-0.177	-0.124	-0.091	-0.059	-0.052	-0.047
OVER 550 TO 600	0.000	0.000	-0.004	-0.012	-0.020	-0.021	-0.043	-0.043	-0.043	-0.028	-0.036	-0.037
OVER 600 TO 650	-0.160	-0.100	-0.067	-0.052	-0.045	-0.039	-0.203	-0.143	-0.106	-0.068	-0.061	-0.055
OVER 650 TO 700	0.000	0.000	-0.004	-0.012	-0.020	-0.021	-0.043	-0.043	-0.043	-0.028	-0.036	-0.037
OVER 700 TO 750	-0.160	-0.100	-0.067	-0.052	-0.045	-0.039	-0.203	-0.143	-0.106	-0.068	-0.061	-0.055
OVER 750 TO 800	0.000	0.000	-0.004	-0.012	-0.020	-0.021	-0.043	-0.043	-0.043	-0.028	-0.036	-0.037
OVER 800 TO 850	-0.160	-0.100	-0.067	-0.052	-0.045	-0.039	-0.203	-0.143	-0.106	-0.068	-0.061	-0.055
OVER 850 TO 900	0.000	0.000	-0.005	-0.014	-0.022	-0.025	-0.050	-0.050	-0.050	-0.033	-0.041	-0.044
OVER 900 TO 950	-0.185	-0.115	-0.077	-0.060	-0.051	-0.045	-0.235	-0.165	-0.122	-0.079	-0.070	-0.064
OVER 950 TO 1000	0.000	0.000	-0.005	-0.014	-0.022	-0.025	-0.050	-0.050	-0.050	-0.033	-0.041	-0.044
OVER 1000 TO 1050	-0.185	-0.115	-0.077	-0.060	-0.051	-0.045	-0.235	-0.165	-0.122	-0.079	-0.070	-0.064
OVER 1050 TO 1100	0.000	0.000	-0.005	-0.014	-0.022	-0.025	-0.050	-0.050	-0.050	-0.033	-0.041	-0.044
OVER 1100 TO 1150	-0.185	-0.115	-0.077	-0.060	-0.051	-0.045	-0.235	-0.165	-0.122	-0.079	-0.070	-0.064
OVER 1150 TO 1200	0.000	0.000	-0.005	-0.014	-0.025	-0.027	-0.056	-0.056	-0.056	-0.036	-0.047	-0.049
OVER 1200 TO 1250	-0.210	-0.130	-0.086	-0.066	-0.057	-0.050	-0.266	-0.186	-0.137	-0.088	-0.079	-0.072
OVER 1250 TO 1300	0.000	0.000	-0.005	-0.014	-0.025	-0.027	-0.056	-0.056	-0.056	-0.036	-0.047	-0.049
OVER 1300 TO 1350	-0.210	-0.130	-0.086	-0.066	-0.057	-0.050	-0.266	-0.186	-0.137	-0.088	-0.079	-0.072
OVER 1350 TO 1400	0.000	0.000	-0.005	-0.016	-0.026	-0.030	-0.062	-0.062	-0.062	-0.041	-0.051	-0.055
OVER 1400 TO 1450	-0.230	-0.140	-0.094	-0.073	-0.062	-0.055	-0.292	-0.202	-0.151	-0.098	-0.087	-0.080
OVER 1450 TO 1500	0.000	0.000	-0.005	-0.016	-0.026	-0.030	-0.062	-0.062	-0.062	-0.041	-0.051	-0.055
OVER 1500 TO 1550	-0.230	-0.140	-0.094	-0.073	-0.062	-0.055	-0.292	-0.202	-0.151	-0.098	-0.087	-0.080
OVER 1550 TO 1600	0.000	0.000	-0.006	-0.017	-0.027	-0.033	-0.068	-0.068	-0.068	-0.045	-0.055	-0.061
OVER 1600 TO 1650	-0.250	-0.155	-0.103	-0.080	-0.067	-0.060	-0.318	-0.223	-0.165	-0.108	-0.095	-0.088
OVER 1650 TO 1700	0.000	0.000	-0.006	-0.017	-0.027	-0.033	-0.068	-0.068	-0.068	-0.045	-0.055	-0.061
OVER 1700 TO 1750	-0.250	-0.155	-0.103	-0.080	-0.067	-0.060	-0.318	-0.223	-0.165	-0.108	-0.095	-0.088

Table A9 Tolerance Zones for Internal (Hole) Dimensions (R10 through R5 and S10 through S5)

Dimensions in mm

BASIC SIZE	R10	R9	R8	R7	R6	R5	S10	S9	S8	S7	S6	S5
OVER 0	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014
TO 3	-0.050	-0.035	-0.024	-0.020	-0.016	-0.014	-0.054	-0.039	-0.028	-0.024	-0.020	-0.018
OVER 3	-0.015	-0.015	-0.015	-0.011	-0.012	-0.014	-0.019	-0.019	-0.019	-0.015	-0.016	-0.018
TO 6	-0.063	-0.045	-0.033	-0.023	-0.020	-0.019	-0.067	-0.049	-0.037	-0.027	-0.024	-0.023
OVER 6	-0.019	-0.019	-0.019	-0.013	-0.016	-0.017	-0.023	-0.023	-0.023	-0.017	-0.020	-0.021
TO 10	-0.077	-0.055	-0.041	-0.028	-0.025	-0.023	-0.081	-0.059	-0.045	-0.032	-0.029	-0.027
OVER 10	-0.023	-0.023	-0.023	-0.016	-0.020	-0.020	-0.028	-0.028	-0.028	-0.021	-0.025	-0.025
TO 14	-0.093	-0.066	-0.050	-0.034	-0.031	-0.028	-0.098	-0.071	-0.055	-0.039	-0.036	-0.033
OVER 14	-0.023	-0.023	-0.023	-0.016	-0.020	-0.020	-0.028	-0.028	-0.028	-0.021	-0.025	-0.025
TO 18	-0.093	-0.066	-0.050	-0.034	-0.031	-0.028	-0.098	-0.071	-0.055	-0.039	-0.036	-0.033
OVER 18	-0.028	-0.028	-0.028	-0.020	-0.024	-0.025	-0.035	-0.035	-0.035	-0.027	-0.031	-0.032
TO 24	-0.112	-0.080	-0.061	-0.041	-0.037	-0.034	-0.119	-0.087	-0.068	-0.048	-0.044	-0.041
OVER 24	-0.028	-0.028	-0.028	-0.020	-0.024	-0.025	-0.035	-0.035	-0.035	-0.027	-0.031	-0.032
TO 30	-0.112	-0.080	-0.061	-0.041	-0.037	-0.034	-0.119	-0.087	-0.068	-0.048	-0.044	-0.041
OVER 30	-0.034	-0.034	-0.034	-0.025	-0.029	-0.030	-0.043	-0.043	-0.043	-0.034	-0.038	-0.039
TO 40	-0.134	-0.096	-0.073	-0.050	-0.045	-0.041	-0.143	-0.105	-0.082	-0.059	-0.054	-0.050
OVER 40	-0.034	-0.034	-0.034	-0.025	-0.029	-0.030	-0.043	-0.043	-0.043	-0.034	-0.038	-0.039
TO 50	-0.134	-0.096	-0.073	-0.050	-0.045	-0.041	-0.143	-0.105	-0.082	-0.059	-0.054	-0.050
OVER 50	-0.041	-0.041	-0.041	-0.030	-0.035	-0.036	-0.053	-0.053	-0.053	-0.042	-0.047	-0.048
TO 65	-0.161	-0.115	-0.087	-0.060	-0.054	-0.049	-0.173	-0.127	-0.099	-0.072	-0.066	-0.061
OVER 65	-0.043	-0.043	-0.043	-0.032	-0.037	-0.038	-0.059	-0.059	-0.059	-0.048	-0.053	-0.054
TO 80	-0.163	-0.117	-0.089	-0.062	-0.056	-0.051	-0.179	-0.133	-0.105	-0.078	-0.072	-0.067
OVER 80	-0.051	-0.051	-0.051	-0.038	-0.044	-0.046	-0.071	-0.071	-0.071	-0.058	-0.064	-0.066
TO 100	-0.191	-0.138	-0.105	-0.073	-0.066	-0.061	-0.211	-0.158	-0.125	-0.093	-0.086	-0.081
OVER 100	-0.054	-0.054	-0.054	-0.041	-0.047	-0.049	-0.079	-0.079	-0.079	-0.066	-0.072	-0.074
TO 120	-0.194	-0.141	-0.108	-0.076	-0.069	-0.064	-0.219	-0.166	-0.133	-0.101	-0.094	-0.089
OVER 120	-0.063	-0.063	-0.063	-0.048	-0.056	-0.057	-0.092	-0.092	-0.092	-0.077	-0.085	-0.086
TO 140	-0.223	-0.163	-0.126	-0.088	-0.081	-0.075	-0.252	-0.192	-0.155	-0.117	-0.110	-0.104
OVER 140	-0.065	-0.065	-0.065	-0.050	-0.058	-0.059	-0.100	-0.100	-0.100	-0.085	-0.093	-0.094
TO 160	-0.225	-0.165	-0.128	-0.090	-0.083	-0.077	-0.260	-0.200	-0.163	-0.125	-0.118	-0.112
OVER 160	-0.068	-0.068	-0.068	-0.053	-0.061	-0.062	-0.108	-0.108	-0.108	-0.093	-0.101	-0.102
TO 180	-0.228	-0.168	-0.131	-0.093	-0.086	-0.080	-0.268	-0.208	-0.171	-0.133	-0.126	-0.120
OVER 180	-0.077	-0.077	-0.077	-0.060	-0.068	-0.071	-0.122	-0.122	-0.122	-0.105	-0.113	-0.116
TO 200	-0.262	-0.192	-0.149	-0.106	-0.097	-0.091	-0.307	-0.237	-0.194	-0.151	-0.142	-0.136
OVER 200	-0.080	-0.080	-0.080	-0.063	-0.071	-0.074	-0.130	-0.130	-0.130	-0.113	-0.121	-0.124
TO 225	-0.265	-0.195	-0.152	-0.109	-0.100	-0.094	-0.315	-0.245	-0.202	-0.159	-0.150	-0.144
OVER 225	-0.084	-0.084	-0.084	-0.067	-0.075	-0.078	-0.140	-0.140	-0.140	-0.123	-0.131	-0.134
TO 250	-0.269	-0.199	-0.156	-0.113	-0.104	-0.098	-0.325	-0.255	-0.212	-0.169	-0.160	-0.154
OVER 250	-0.094	-0.094	-0.094	-0.074	-0.085	-0.087	-0.158	-0.158	-0.158	-0.138	-0.149	-0.151
TO 280	-0.304	-0.224	-0.175	-0.126	-0.117	-0.110	-0.368	-0.288	-0.239	-0.190	-0.181	-0.174
OVER 280	-0.098	-0.098	-0.098	-0.078	-0.089	-0.091	-0.170	-0.170	-0.170	-0.150	-0.161	-0.163
TO 315	-0.308	-0.228	-0.179	-0.130	-0.121	-0.114	-0.380	-0.300	-0.251	-0.202	-0.193	-0.186
OVER 315	-0.108	-0.108	-0.108	-0.087	-0.097	-0.101	-0.190	-0.190	-0.190	-0.169	-0.179	-0.183
TO 355	-0.338	-0.248	-0.197	-0.144	-0.133	-0.126	-0.420	-0.330	-0.279	-0.226	-0.215	-0.208
OVER 355	-0.114	-0.114	-0.114	-0.093	-0.103	-0.107	-0.208	-0.208	-0.208	-0.187	-0.197	-0.201
TO 400	-0.344	-0.254	-0.203	-0.150	-0.139	-0.132	-0.438	-0.348	-0.297	-0.244	-0.233	-0.226
OVER 400	-0.126	-0.126	-0.126	-0.103	-0.113	-0.119	-0.232	-0.232	-0.232	-0.209	-0.219	-0.225
TO 450	-0.376	-0.281	-0.223	-0.166	-0.153	-0.146	-0.482	-0.387	-0.329	-0.272	-0.259	-0.252
OVER 450	-0.132	-0.132	-0.132	-0.109	-0.119	-0.125	-0.252	-0.252	-0.252	-0.229	-0.239	-0.245
TO 500	-0.382	-0.287	-0.229	-0.172	-0.159	-0.152	-0.502	-0.407	-0.349	-0.292	-0.279	-0.272

Table A10 Tolerance Zones for Internal (Hole) Dimensions (T10 through T5 and U10 through U5)

Dimensions in mm

BASIC SIZE	T10	T9	T8	T7	T6	T5	U10	U9	U8	U7	U6	U5	
OVER 0 TO 3	NUMERICAL VALUES FOR TOLERANCE ZONES IN THIS AREA NOT DEFINED.						-0.018	-0.018	-0.018	-0.018	-0.018	-0.018	-0.018
OVER 3 TO 6							-0.058	-0.043	-0.032	-0.028	-0.024	-0.022	
OVER 6 TO 10							-0.023	-0.023	-0.023	-0.019	-0.020	-0.022	
OVER 10 TO 14							-0.071	-0.053	-0.041	-0.031	-0.028	-0.027	
OVER 14 TO 18							-0.028	-0.028	-0.028	-0.022	-0.025	-0.026	
OVER 18 TO 24							-0.086	-0.064	-0.050	-0.037	-0.034	-0.032	
OVER 24 TO 30	-0.033	-0.033	-0.033	-0.026	-0.030	-0.030	-0.048	-0.048	-0.048	-0.040	-0.044	-0.045	
OVER 30 TO 40	-0.103	-0.076	-0.060	-0.044	-0.041	-0.038	-0.125	-0.100	-0.081	-0.061	-0.057	-0.054	
OVER 40 TO 50	-0.048	-0.048	-0.048	-0.039	-0.043	-0.044	-0.060	-0.060	-0.060	-0.051	-0.055	-0.056	
OVER 50 TO 65	-0.148	-0.110	-0.087	-0.064	-0.059	-0.055	-0.160	-0.122	-0.099	-0.076	-0.071	-0.067	
OVER 65 TO 80	-0.054	-0.054	-0.054	-0.045	-0.049	-0.050	-0.070	-0.070	-0.070	-0.061	-0.065	-0.066	
OVER 80 TO 100	-0.154	-0.116	-0.093	-0.070	-0.065	-0.061	-0.170	-0.132	-0.109	-0.086	-0.081	-0.077	
OVER 100 TO 120	-0.066	-0.066	-0.066	-0.055	-0.060	-0.061	-0.087	-0.087	-0.087	-0.076	-0.081	-0.082	
OVER 120 TO 140	-0.186	-0.140	-0.112	-0.085	-0.079	-0.074	-0.207	-0.161	-0.133	-0.106	-0.100	-0.095	
OVER 140 TO 160	-0.075	-0.075	-0.075	-0.064	-0.069	-0.070	-0.102	-0.102	-0.102	-0.091	-0.096	-0.097	
OVER 160 TO 180	-0.195	-0.149	-0.121	-0.094	-0.088	-0.083	-0.222	-0.176	-0.148	-0.121	-0.115	-0.110	
OVER 180 TO 200	-0.091	-0.091	-0.091	-0.078	-0.084	-0.086	-0.124	-0.124	-0.124	-0.111	-0.117	-0.119	
OVER 200 TO 225	-0.231	-0.178	-0.145	-0.113	-0.106	-0.101	-0.264	-0.211	-0.178	-0.146	-0.139	-0.134	
OVER 225 TO 250	-0.104	-0.104	-0.104	-0.091	-0.097	-0.099	-0.144	-0.144	-0.144	-0.131	-0.137	-0.139	
OVER 250 TO 280	-0.244	-0.191	-0.158	-0.126	-0.119	-0.114	-0.284	-0.231	-0.198	-0.166	-0.159	-0.154	
OVER 280 TO 315	-0.122	-0.122	-0.122	-0.107	-0.115	-0.116	-0.170	-0.170	-0.170	-0.155	-0.163	-0.164	
OVER 315 TO 355	-0.282	-0.222	-0.185	-0.147	-0.140	-0.134	-0.330	-0.270	-0.233	-0.195	-0.188	-0.182	
OVER 355 TO 400	-0.134	-0.134	-0.134	-0.119	-0.127	-0.128	-0.190	-0.190	-0.190	-0.175	-0.183	-0.184	
OVER 400 TO 450	-0.294	-0.234	-0.197	-0.159	-0.152	-0.146	-0.350	-0.290	-0.253	-0.215	-0.208	-0.202	
OVER 450 TO 500	-0.146	-0.146	-0.146	-0.131	-0.139	-0.140	-0.210	-0.210	-0.210	-0.195	-0.203	-0.204	
OVER 500	-0.306	-0.246	-0.209	-0.171	-0.164	-0.158	-0.370	-0.310	-0.273	-0.235	-0.228	-0.222	
OVER 500	-0.166	-0.166	-0.166	-0.149	-0.157	-0.160	-0.236	-0.236	-0.236	-0.219	-0.227	-0.230	
OVER 500	-0.351	-0.281	-0.238	-0.195	-0.186	-0.180	-0.421	-0.351	-0.308	-0.265	-0.256	-0.250	
OVER 500	-0.180	-0.180	-0.180	-0.163	-0.171	-0.174	-0.258	-0.258	-0.258	-0.241	-0.249	-0.252	
OVER 500	-0.365	-0.295	-0.252	-0.209	-0.200	-0.194	-0.443	-0.373	-0.330	-0.287	-0.278	-0.272	
OVER 500	-0.196	-0.196	-0.196	-0.179	-0.187	-0.190	-0.284	-0.284	-0.284	-0.267	-0.275	-0.278	
OVER 500	-0.381	-0.311	-0.268	-0.225	-0.216	-0.210	-0.469	-0.399	-0.356	-0.313	-0.304	-0.298	
OVER 500	-0.218	-0.218	-0.218	-0.198	-0.209	-0.211	-0.315	-0.315	-0.315	-0.295	-0.306	-0.308	
OVER 500	-0.428	-0.348	-0.299	-0.250	-0.241	-0.234	-0.525	-0.445	-0.396	-0.347	-0.338	-0.331	
OVER 500	-0.240	-0.240	-0.240	-0.220	-0.231	-0.233	-0.350	-0.350	-0.350	-0.330	-0.341	-0.343	
OVER 500	-0.450	-0.370	-0.321	-0.272	-0.263	-0.256	-0.560	-0.480	-0.431	-0.382	-0.373	-0.366	
OVER 500	-0.268	-0.268	-0.268	-0.247	-0.257	-0.261	-0.390	-0.390	-0.390	-0.369	-0.379	-0.383	
OVER 500	-0.498	-0.408	-0.357	-0.304	-0.293	-0.286	-0.620	-0.530	-0.479	-0.426	-0.415	-0.408	
OVER 500	-0.294	-0.294	-0.294	-0.273	-0.283	-0.287	-0.435	-0.435	-0.435	-0.414	-0.424	-0.428	
OVER 500	-0.524	-0.434	-0.383	-0.330	-0.319	-0.312	-0.665	-0.575	-0.524	-0.471	-0.460	-0.453	
OVER 500	-0.330	-0.330	-0.330	-0.307	-0.317	-0.323	-0.490	-0.490	-0.490	-0.467	-0.477	-0.483	
OVER 500	-0.580	-0.485	-0.427	-0.370	-0.357	-0.350	-0.740	-0.645	-0.587	-0.530	-0.517	-0.510	
OVER 500	-0.360	-0.360	-0.360	-0.337	-0.347	-0.353	-0.540	-0.540	-0.540	-0.517	-0.527	-0.533	
OVER 500	-0.610	-0.515	-0.457	-0.400	-0.387	-0.380	-0.790	-0.695	-0.637	-0.580	-0.567	-0.560	

Table A11 Tolerance Zones for Internal (Hole) Dimensions (V10 through V5 and X10 through X5)

Dimensions in mm

BASIC SIZE	V10	V9	V8	V7	V6	V5	X10	X9	X8	X7	X6	X5					
OVER 0 TO 3	NUMERICAL VALUES FOR TOLERANCE ZONES IN THIS AREA NOT DEFINED.						-0.020	-0.020	-0.020	-0.020	-0.020	-0.020	-0.020				
OVER 3 TO 6							-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028
OVER 6 TO 10							-0.034	-0.034	-0.034	-0.034	-0.034	-0.034	-0.034	-0.034	-0.034	-0.034	-0.034
OVER 10 TO 14							-0.040	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040
OVER 14 TO 18	-0.039	-0.039	-0.039	-0.032	-0.036	-0.036	-0.045	-0.045	-0.045	-0.038	-0.042	-0.042					
OVER 18 TO 24	-0.047	-0.047	-0.047	-0.039	-0.043	-0.044	-0.054	-0.054	-0.054	-0.046	-0.050	-0.051					
OVER 24 TO 30	-0.055	-0.055	-0.055	-0.047	-0.051	-0.052	-0.064	-0.064	-0.064	-0.056	-0.060	-0.061					
OVER 30 TO 40	-0.068	-0.068	-0.068	-0.059	-0.063	-0.064	-0.080	-0.080	-0.080	-0.071	-0.075	-0.076					
OVER 40 TO 50	-0.081	-0.081	-0.081	-0.072	-0.076	-0.077	-0.097	-0.097	-0.097	-0.088	-0.092	-0.093					
OVER 50 TO 65	-0.102	-0.102	-0.102	-0.091	-0.096	-0.097	-0.122	-0.122	-0.122	-0.111	-0.116	-0.117					
OVER 65 TO 80	-0.120	-0.120	-0.120	-0.109	-0.114	-0.115	-0.146	-0.146	-0.146	-0.135	-0.140	-0.141					
OVER 80 TO 100	-0.146	-0.146	-0.146	-0.133	-0.139	-0.141	-0.178	-0.178	-0.178	-0.165	-0.171	-0.173					
OVER 100 TO 120	-0.172	-0.172	-0.172	-0.159	-0.165	-0.167	-0.210	-0.210	-0.210	-0.197	-0.203	-0.205					
OVER 120 TO 140	-0.202	-0.202	-0.202	-0.187	-0.195	-0.196	-0.248	-0.248	-0.248	-0.233	-0.241	-0.242					
OVER 140 TO 160	-0.228	-0.228	-0.228	-0.213	-0.221	-0.222	-0.280	-0.280	-0.280	-0.265	-0.273	-0.274					
OVER 160 TO 180	-0.252	-0.252	-0.252	-0.237	-0.245	-0.246	-0.310	-0.310	-0.310	-0.295	-0.303	-0.304					
OVER 180 TO 200	-0.284	-0.284	-0.284	-0.267	-0.275	-0.278	-0.350	-0.350	-0.350	-0.333	-0.341	-0.344					
OVER 200 TO 225	-0.310	-0.310	-0.310	-0.293	-0.301	-0.304	-0.385	-0.385	-0.385	-0.368	-0.376	-0.379					
OVER 225 TO 250	-0.340	-0.340	-0.340	-0.323	-0.331	-0.334	-0.425	-0.425	-0.425	-0.408	-0.416	-0.419					
OVER 250 TO 280	-0.385	-0.385	-0.385	-0.365	-0.376	-0.378	-0.475	-0.475	-0.475	-0.455	-0.466	-0.468					
OVER 280 TO 315	-0.425	-0.425	-0.425	-0.405	-0.416	-0.418	-0.525	-0.525	-0.525	-0.505	-0.516	-0.518					
OVER 315 TO 355	-0.475	-0.475	-0.475	-0.454	-0.464	-0.468	-0.590	-0.590	-0.590	-0.569	-0.579	-0.583					
OVER 355 TO 400	-0.530	-0.530	-0.530	-0.509	-0.519	-0.523	-0.660	-0.660	-0.660	-0.639	-0.649	-0.653					
OVER 400 TO 450	-0.595	-0.595	-0.595	-0.572	-0.582	-0.588	-0.740	-0.740	-0.740	-0.717	-0.727	-0.733					
OVER 450 TO 500	-0.660	-0.660	-0.660	-0.637	-0.647	-0.653	-0.820	-0.820	-0.820	-0.797	-0.807	-0.813					
	-0.910	-0.910	-0.910	-0.887	-0.897	-0.903	-1.070	-1.070	-1.070	-1.047	-1.057	-1.063					

Table A12 Tolerance Zones for Internal (Hole) Dimensions (Y10 through Y5 and Z10 through Z5)

Dimensions in mm

BASIC SIZE	Y10	Y9	Y8	Y7	Y6	Y5	Z10	Z9	Z8	Z7	Z6	Z5						
OVER 0 TO 3	NUMERICAL VALUES FOR TOLERANCE ZONES IN THIS AREA NOT DEFINED.							-0.026	-0.026	-0.026	-0.026	-0.026	-0.026					
OVER 3 TO 6								-0.035	-0.035	-0.035	-0.031	-0.032	-0.034					
OVER 6 TO 10								-0.042	-0.042	-0.042	-0.036	-0.039	-0.040					
OVER 10 TO 14								-0.050	-0.050	-0.050	-0.043	-0.047	-0.047					
OVER 14 TO 18								-0.060	-0.060	-0.060	-0.053	-0.057	-0.057					
OVER 18 TO 24							-0.063	-0.063	-0.063	-0.055	-0.059	-0.060	-0.073	-0.073	-0.073	-0.065	-0.069	-0.070
OVER 24 TO 30							-0.147	-0.115	-0.096	-0.076	-0.072	-0.069	-0.157	-0.125	-0.106	-0.086	-0.082	-0.079
OVER 30 TO 40							-0.075	-0.075	-0.075	-0.067	-0.071	-0.072	-0.088	-0.088	-0.088	-0.080	-0.084	-0.085
OVER 40 TO 50							-0.159	-0.127	-0.108	-0.088	-0.084	-0.081	-0.172	-0.140	-0.121	-0.101	-0.097	-0.094
OVER 50 TO 65							-0.094	-0.094	-0.094	-0.085	-0.089	-0.090	-0.112	-0.112	-0.112	-0.103	-0.107	-0.108
OVER 65 TO 80							-0.194	-0.156	-0.133	-0.110	-0.105	-0.101	-0.212	-0.174	-0.151	-0.128	-0.123	-0.119
OVER 80 TO 100							-0.114	-0.114	-0.114	-0.105	-0.109	-0.110	-0.136	-0.136	-0.136	-0.127	-0.131	-0.132
OVER 100 TO 120	-0.214	-0.176	-0.153	-0.130	-0.125	-0.121	-0.236	-0.198	-0.175	-0.152	-0.147	-0.143						
OVER 120 TO 140	-0.144	-0.144	-0.144	-0.133	-0.138	-0.139	-0.172	-0.172	-0.172	-0.161	-0.166	-0.167						
OVER 140 TO 160	-0.264	-0.218	-0.190	-0.163	-0.157	-0.152	-0.292	-0.246	-0.218	-0.191	-0.185	-0.180						
OVER 160 TO 180	-0.174	-0.174	-0.174	-0.163	-0.168	-0.169	-0.210	-0.210	-0.210	-0.199	-0.204	-0.205						
OVER 180 TO 200	-0.294	-0.248	-0.220	-0.193	-0.187	-0.182	-0.330	-0.284	-0.256	-0.229	-0.223	-0.218						
OVER 200 TO 225	-0.214	-0.214	-0.214	-0.201	-0.207	-0.209	-0.258	-0.258	-0.258	-0.245	-0.251	-0.253						
OVER 225 TO 250	-0.354	-0.301	-0.268	-0.236	-0.229	-0.224	-0.398	-0.345	-0.312	-0.280	-0.273	-0.268						
OVER 250 TO 280	-0.254	-0.254	-0.254	-0.241	-0.247	-0.248	-0.310	-0.310	-0.310	-0.297	-0.303	-0.305						
OVER 280 TO 315	-0.394	-0.341	-0.308	-0.276	-0.269	-0.264	-0.450	-0.397	-0.364	-0.332	-0.325	-0.320						
OVER 315 TO 355	-0.300	-0.300	-0.300	-0.285	-0.293	-0.294	-0.365	-0.365	-0.365	-0.350	-0.358	-0.359						
OVER 355 TO 400	-0.460	-0.400	-0.363	-0.325	-0.318	-0.312	-0.525	-0.465	-0.428	-0.390	-0.383	-0.377						
OVER 400 TO 450	-0.340	-0.340	-0.340	-0.325	-0.333	-0.334	-0.415	-0.415	-0.415	-0.400	-0.408	-0.409						
OVER 450 TO 500	-0.500	-0.440	-0.403	-0.365	-0.358	-0.352	-0.575	-0.515	-0.478	-0.440	-0.433	-0.427						
OVER 500 TO 550	-0.380	-0.380	-0.380	-0.365	-0.373	-0.374	-0.465	-0.465	-0.465	-0.450	-0.458	-0.459						
OVER 550 TO 600	-0.540	-0.480	-0.443	-0.405	-0.398	-0.392	-0.625	-0.565	-0.528	-0.490	-0.483	-0.477						
OVER 600 TO 650	-0.425	-0.425	-0.425	-0.408	-0.416	-0.419	-0.520	-0.520	-0.520	-0.503	-0.511	-0.514						
OVER 650 TO 700	-0.610	-0.540	-0.497	-0.454	-0.445	-0.439	-0.705	-0.635	-0.592	-0.549	-0.540	-0.534						
OVER 700 TO 750	-0.470	-0.470	-0.470	-0.453	-0.461	-0.464	-0.575	-0.575	-0.575	-0.558	-0.566	-0.569						
OVER 750 TO 800	-0.655	-0.585	-0.542	-0.499	-0.490	-0.484	-0.760	-0.690	-0.647	-0.604	-0.595	-0.589						
OVER 800 TO 850	-0.520	-0.520	-0.520	-0.503	-0.511	-0.514	-0.640	-0.640	-0.640	-0.623	-0.631	-0.634						
OVER 850 TO 900	-0.705	-0.635	-0.592	-0.549	-0.540	-0.534	-0.825	-0.755	-0.712	-0.669	-0.660	-0.654						
OVER 900 TO 950	-0.580	-0.580	-0.580	-0.560	-0.571	-0.573	-0.710	-0.710	-0.710	-0.690	-0.701	-0.703						
OVER 950 TO 1000	-0.790	-0.710	-0.661	-0.612	-0.603	-0.596	-0.920	-0.840	-0.791	-0.742	-0.733	-0.726						
OVER 1000 TO 1100	-0.650	-0.650	-0.650	-0.630	-0.641	-0.643	-0.790	-0.790	-0.790	-0.770	-0.781	-0.783						
OVER 1100 TO 1200	-0.860	-0.780	-0.731	-0.682	-0.673	-0.666	-1.000	-0.920	-0.871	-0.822	-0.813	-0.806						
OVER 1200 TO 1300	-0.730	-0.730	-0.730	-0.709	-0.719	-0.723	-0.900	-0.900	-0.900	-0.879	-0.889	-0.893						
OVER 1300 TO 1400	-0.960	-0.870	-0.819	-0.766	-0.755	-0.748	-1.130	-1.040	-0.989	-0.936	-0.925	-0.918						
OVER 1400 TO 1500	-0.820	-0.820	-0.820	-0.799	-0.809	-0.813	-1.000	-1.000	-1.000	-0.979	-0.989	-0.993						
OVER 1500 TO 1600	-1.050	-0.960	-0.909	-0.856	-0.845	-0.838	-1.230	-1.140	-1.089	-1.036	-1.025	-1.018						
OVER 1600 TO 1700	-0.920	-0.920	-0.920	-0.897	-0.907	-0.913	-1.100	-1.100	-1.100	-1.077	-1.087	-1.093						
OVER 1700 TO 1800	-1.170	-1.075	-1.017	-0.960	-0.947	-0.940	-1.350	-1.255	-1.197	-1.140	-1.127	-1.120						
OVER 1800 TO 1900	-1.000	-1.000	-1.000	-0.977	-0.987	-0.993	-1.250	-1.250	-1.250	-1.227	-1.237	-1.243						
OVER 1900 TO 2000	-1.250	-1.155	-1.097	-1.040	-1.027	-1.020	-1.500	-1.405	-1.347	-1.290	-1.277	-1.270						

Table A13 Tolerance Zones for External (Shaft) Dimensions (a14 through a9 and b14 through b9)

Dimensions in mm

BASIC SIZE	a14	a13	a12	a11	a10	a9	b14	b13	b12	b11	b10	b9
OVER 0 TØ 3	-0.270 -0.520	-0.270 -0.410	-0.270 -0.370	-0.270 -0.330	-0.270 -0.310	-0.270 -0.295	-0.140 -0.390	-0.140 -0.280	-0.140 -0.240	-0.140 -0.200	-0.140 -0.180	-0.140 -0.165
OVER 3 TØ 6	-0.270 -0.570	-0.270 -0.450	-0.270 -0.390	-0.270 -0.345	-0.270 -0.318	-0.270 -0.300	-0.140 -0.440	-0.140 -0.320	-0.140 -0.260	-0.140 -0.215	-0.140 -0.188	-0.140 -0.170
OVER 6 TØ 10	-0.280 -0.640	-0.280 -0.500	-0.280 -0.430	-0.280 -0.370	-0.280 -0.338	-0.280 -0.316	-0.150 -0.510	-0.150 -0.370	-0.150 -0.300	-0.150 -0.240	-0.150 -0.208	-0.150 -0.186
OVER 10 TØ 14	-0.290 -0.720	-0.290 -0.560	-0.290 -0.470	-0.290 -0.400	-0.290 -0.360	-0.290 -0.333	-0.150 -0.580	-0.150 -0.420	-0.150 -0.330	-0.150 -0.260	-0.150 -0.220	-0.150 -0.193
OVER 14 TØ 18	-0.290 -0.720	-0.290 -0.560	-0.290 -0.470	-0.290 -0.400	-0.290 -0.360	-0.290 -0.333	-0.150 -0.580	-0.150 -0.420	-0.150 -0.330	-0.150 -0.260	-0.150 -0.220	-0.150 -0.193
OVER 18 TØ 24	-0.300 -0.820	-0.300 -0.630	-0.300 -0.510	-0.300 -0.430	-0.300 -0.384	-0.300 -0.352	-0.160 -0.680	-0.160 -0.490	-0.160 -0.370	-0.160 -0.290	-0.160 -0.244	-0.160 -0.212
OVER 24 TØ 30	-0.300 -0.820	-0.300 -0.630	-0.300 -0.510	-0.300 -0.430	-0.300 -0.384	-0.300 -0.352	-0.160 -0.680	-0.160 -0.490	-0.160 -0.370	-0.160 -0.290	-0.160 -0.244	-0.160 -0.212
OVER 30 TØ 40	-0.310 -0.930	-0.310 -0.700	-0.310 -0.560	-0.310 -0.470	-0.310 -0.410	-0.310 -0.372	-0.170 -0.790	-0.170 -0.560	-0.170 -0.420	-0.170 -0.330	-0.170 -0.270	-0.170 -0.232
OVER 40 TØ 50	-0.320 -0.940	-0.320 -0.710	-0.320 -0.570	-0.320 -0.480	-0.320 -0.420	-0.320 -0.382	-0.180 -0.800	-0.180 -0.570	-0.180 -0.430	-0.180 -0.340	-0.180 -0.280	-0.180 -0.242
OVER 50 TØ 65	-0.340 -1.080	-0.340 -0.800	-0.340 -0.640	-0.340 -0.530	-0.340 -0.460	-0.340 -0.414	-0.190 -0.930	-0.190 -0.650	-0.190 -0.490	-0.190 -0.380	-0.190 -0.310	-0.190 -0.264
OVER 65 TØ 80	-0.360 -1.100	-0.360 -0.820	-0.360 -0.660	-0.360 -0.550	-0.360 -0.480	-0.360 -0.434	-0.200 -0.940	-0.200 -0.660	-0.200 -0.500	-0.200 -0.350	-0.200 -0.320	-0.200 -0.274
OVER 80 TØ 100	-0.380 -1.250	-0.380 -0.920	-0.380 -0.730	-0.380 -0.600	-0.380 -0.520	-0.380 -0.467	-0.220 -1.090	-0.220 -0.760	-0.220 -0.570	-0.220 -0.440	-0.220 -0.360	-0.220 -0.307
OVER 100 TØ 120	-0.410 -1.280	-0.410 -0.950	-0.410 -0.760	-0.410 -0.630	-0.410 -0.550	-0.410 -0.497	-0.240 -1.110	-0.240 -0.780	-0.240 -0.590	-0.240 -0.460	-0.240 -0.380	-0.240 -0.327
OVER 120 TØ 140	-0.460 -1.460	-0.460 -1.090	-0.460 -0.860	-0.460 -0.710	-0.460 -0.620	-0.460 -0.560	-0.260 -1.260	-0.260 -0.890	-0.260 -0.660	-0.260 -0.510	-0.260 -0.420	-0.260 -0.360
OVER 140 TØ 160	-0.520 -1.520	-0.520 -1.150	-0.520 -0.920	-0.520 -0.770	-0.520 -0.680	-0.520 -0.620	-0.280 -1.280	-0.280 -0.910	-0.280 -0.680	-0.280 -0.530	-0.280 -0.440	-0.280 -0.380
OVER 160 TØ 180	-0.580 -1.580	-0.580 -1.210	-0.580 -0.980	-0.580 -0.830	-0.580 -0.740	-0.580 -0.680	-0.310 -1.310	-0.310 -0.940	-0.310 -0.710	-0.310 -0.560	-0.310 -0.470	-0.310 -0.410
OVER 180 TØ 200	-0.660 -1.810	-0.660 -1.380	-0.660 -1.120	-0.660 -0.950	-0.660 -0.845	-0.660 -0.775	-0.340 -1.490	-0.340 -1.060	-0.340 -0.800	-0.340 -0.620	-0.340 -0.525	-0.340 -0.455
OVER 200 TØ 225	-0.740 -1.890	-0.740 -1.460	-0.740 -1.200	-0.740 -1.030	-0.740 -0.925	-0.740 -0.855	-0.380 -1.530	-0.380 -1.100	-0.380 -0.840	-0.380 -0.670	-0.380 -0.565	-0.380 -0.495
OVER 225 TØ 250	-0.820 -1.970	-0.820 -1.540	-0.820 -1.280	-0.820 -1.110	-0.820 -1.005	-0.820 -0.935	-0.420 -1.570	-0.420 -1.140	-0.420 -0.880	-0.420 -0.710	-0.420 -0.605	-0.420 -0.535
OVER 250 TØ 280	-0.920 -2.220	-0.920 -1.730	-0.920 -1.440	-0.920 -1.240	-0.920 -1.130	-0.920 -1.050	-0.480 -1.780	-0.480 -1.290	-0.480 -1.000	-0.480 -0.800	-0.480 -0.690	-0.480 -0.610
OVER 280 TØ 315	-1.050 -2.350	-1.050 -1.860	-1.050 -1.570	-1.050 -1.370	-1.050 -1.260	-1.050 -1.180	-0.540 -1.840	-0.540 -1.350	-0.540 -1.060	-0.540 -0.860	-0.540 -0.750	-0.540 -0.670
OVER 315 TØ 355	-1.200 -2.600	-1.200 -2.090	-1.200 -1.770	-1.200 -1.560	-1.200 -1.430	-1.200 -1.340	-0.600 -2.000	-0.600 -1.490	-0.600 -1.170	-0.600 -0.960	-0.600 -0.830	-0.600 -0.740
OVER 355 TØ 400	-1.350 -2.750	-1.350 -2.240	-1.350 -1.920	-1.350 -1.710	-1.350 -1.580	-1.350 -1.490	-0.680 -2.080	-0.680 -1.570	-0.680 -1.250	-0.680 -1.040	-0.680 -0.910	-0.680 -0.820
OVER 400 TØ 450	-1.500 -3.050	-1.500 -2.470	-1.500 -2.130	-1.500 -1.900	-1.500 -1.750	-1.500 -1.655	-0.760 -2.310	-0.760 -1.730	-0.760 -1.390	-0.760 -1.160	-0.760 -1.010	-0.760 -0.915
OVER 450 TØ 500	-1.650 -3.200	-1.650 -2.620	-1.650 -2.280	-1.650 -2.050	-1.650 -1.900	-1.650 -1.805	-0.840 -2.390	-0.840 -1.810	-0.840 -1.470	-0.840 -1.240	-0.840 -1.090	-0.840 -0.995

Table A14 Tolerance Zones for External (Shaft) Dimensions (c13 through c8 and d12 through d7)

Dimensions in mm

BASIC SIZE		c13	c12	c11	c10	c9	c8	d12	d11	d10	d9	d8	d7
OVER	0	-0.060	-0.060	-0.060	-0.060	-0.060	-0.060	-0.020	-0.020	-0.020	-0.020	-0.020	-0.020
TO	3	-0.200	-0.160	-0.120	-0.100	-0.085	-0.074	-0.120	-0.080	-0.060	-0.045	-0.034	-0.030
OVER	3	-0.070	-0.070	-0.070	-0.070	-0.070	-0.070	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030
TO	6	-0.250	-0.190	-0.145	-0.118	-0.100	-0.088	-0.150	-0.105	-0.078	-0.060	-0.048	-0.042
OVER	6	-0.080	-0.080	-0.080	-0.080	-0.080	-0.080	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040
TO	10	-0.300	-0.230	-0.170	-0.138	-0.116	-0.102	-0.190	-0.130	-0.098	-0.076	-0.062	-0.055
OVER	10	-0.095	-0.095	-0.095	-0.095	-0.095	-0.095	-0.050	-0.050	-0.050	-0.050	-0.050	-0.050
TO	14	-0.365	-0.275	-0.205	-0.165	-0.138	-0.122	-0.230	-0.160	-0.120	-0.093	-0.077	-0.068
OVER	14	-0.095	-0.095	-0.095	-0.095	-0.095	-0.095	-0.050	-0.050	-0.050	-0.050	-0.050	-0.050
TO	18	-0.365	-0.275	-0.205	-0.165	-0.138	-0.122	-0.230	-0.160	-0.120	-0.093	-0.077	-0.068
OVER	18	-0.110	-0.110	-0.110	-0.110	-0.110	-0.110	-0.065	-0.065	-0.065	-0.065	-0.065	-0.065
TO	24	-0.440	-0.320	-0.240	-0.194	-0.162	-0.143	-0.275	-0.195	-0.149	-0.117	-0.098	-0.086
OVER	24	-0.110	-0.110	-0.110	-0.110	-0.110	-0.110	-0.065	-0.065	-0.065	-0.065	-0.065	-0.065
TO	30	-0.440	-0.320	-0.240	-0.194	-0.162	-0.143	-0.275	-0.195	-0.149	-0.117	-0.098	-0.086
OVER	30	-0.120	-0.120	-0.120	-0.120	-0.120	-0.120	-0.080	-0.080	-0.080	-0.080	-0.080	-0.080
TO	40	-0.510	-0.370	-0.280	-0.220	-0.182	-0.159	-0.330	-0.240	-0.180	-0.142	-0.119	-0.105
OVER	40	-0.130	-0.130	-0.130	-0.130	-0.130	-0.130	-0.080	-0.080	-0.080	-0.080	-0.080	-0.080
TO	50	-0.520	-0.380	-0.290	-0.230	-0.192	-0.169	-0.330	-0.240	-0.180	-0.142	-0.119	-0.105
OVER	50	-0.140	-0.140	-0.140	-0.140	-0.140	-0.140	-0.100	-0.100	-0.100	-0.100	-0.100	-0.100
TO	65	-0.600	-0.440	-0.330	-0.260	-0.214	-0.186	-0.400	-0.290	-0.220	-0.174	-0.146	-0.130
OVER	65	-0.150	-0.150	-0.150	-0.150	-0.150	-0.150	-0.100	-0.100	-0.100	-0.100	-0.100	-0.100
TO	80	-0.610	-0.450	-0.340	-0.270	-0.224	-0.196	-0.400	-0.290	-0.220	-0.174	-0.146	-0.130
OVER	80	-0.170	-0.170	-0.170	-0.170	-0.170	-0.170	-0.120	-0.120	-0.120	-0.120	-0.120	-0.120
TO	100	-0.710	-0.520	-0.390	-0.310	-0.257	-0.224	-0.470	-0.340	-0.260	-0.207	-0.174	-0.155
OVER	100	-0.180	-0.180	-0.180	-0.180	-0.180	-0.180	-0.120	-0.120	-0.120	-0.120	-0.120	-0.120
TO	120	-0.720	-0.530	-0.400	-0.320	-0.267	-0.234	-0.470	-0.340	-0.260	-0.207	-0.174	-0.155
OVER	120	-0.200	-0.200	-0.200	-0.200	-0.200	-0.200	-0.145	-0.145	-0.145	-0.145	-0.145	-0.145
TO	140	-0.830	-0.600	-0.450	-0.360	-0.300	-0.263	-0.545	-0.395	-0.305	-0.245	-0.208	-0.185
OVER	140	-0.210	-0.210	-0.210	-0.210	-0.210	-0.210	-0.145	-0.145	-0.145	-0.145	-0.145	-0.145
TO	160	-0.840	-0.610	-0.460	-0.370	-0.310	-0.273	-0.545	-0.395	-0.305	-0.245	-0.208	-0.185
OVER	160	-0.230	-0.230	-0.230	-0.230	-0.230	-0.230	-0.145	-0.145	-0.145	-0.145	-0.145	-0.145
TO	180	-0.860	-0.630	-0.480	-0.390	-0.330	-0.293	-0.545	-0.395	-0.305	-0.245	-0.208	-0.185
OVER	180	-0.240	-0.240	-0.240	-0.240	-0.240	-0.240	-0.170	-0.170	-0.170	-0.170	-0.170	-0.170
TO	200	-0.960	-0.700	-0.530	-0.425	-0.355	-0.312	-0.630	-0.460	-0.355	-0.285	-0.242	-0.216
OVER	200	-0.260	-0.260	-0.260	-0.260	-0.260	-0.260	-0.170	-0.170	-0.170	-0.170	-0.170	-0.170
TO	225	-0.980	-0.720	-0.550	-0.445	-0.375	-0.332	-0.630	-0.460	-0.355	-0.285	-0.242	-0.216
OVER	225	-0.280	-0.280	-0.280	-0.280	-0.280	-0.280	-0.170	-0.170	-0.170	-0.170	-0.170	-0.170
TO	250	-1.000	-0.740	-0.570	-0.465	-0.395	-0.352	-0.630	-0.460	-0.355	-0.285	-0.242	-0.216
OVER	250	-0.300	-0.300	-0.300	-0.300	-0.300	-0.300	-0.190	-0.190	-0.190	-0.190	-0.190	-0.190
TO	280	-1.110	-0.820	-0.620	-0.510	-0.430	-0.381	-0.710	-0.510	-0.400	-0.320	-0.271	-0.242
OVER	280	-0.330	-0.330	-0.330	-0.330	-0.330	-0.330	-0.190	-0.190	-0.190	-0.190	-0.190	-0.190
TO	315	-1.140	-0.850	-0.650	-0.540	-0.460	-0.411	-0.710	-0.510	-0.400	-0.320	-0.271	-0.242
OVER	315	-0.360	-0.360	-0.360	-0.360	-0.360	-0.360	-0.210	-0.210	-0.210	-0.210	-0.210	-0.210
TO	355	-1.250	-0.930	-0.720	-0.590	-0.500	-0.449	-0.780	-0.570	-0.440	-0.350	-0.299	-0.267
OVER	355	-0.400	-0.400	-0.400	-0.400	-0.400	-0.400	-0.210	-0.210	-0.210	-0.210	-0.210	-0.210
TO	400	-1.290	-0.970	-0.760	-0.630	-0.540	-0.489	-0.780	-0.570	-0.440	-0.350	-0.299	-0.267
OVER	400	-0.440	-0.440	-0.440	-0.440	-0.440	-0.440	-0.230	-0.230	-0.230	-0.230	-0.230	-0.230
TO	450	-1.410	-1.070	-0.840	-0.690	-0.595	-0.537	-0.860	-0.630	-0.480	-0.385	-0.327	-0.293
OVER	450	-0.480	-0.480	-0.480	-0.480	-0.480	-0.480	-0.230	-0.230	-0.230	-0.230	-0.230	-0.230
TO	500	-1.450	-1.110	-0.880	-0.730	-0.635	-0.577	-0.860	-0.630	-0.480	-0.385	-0.327	-0.293

Table A15 Tolerance Zones for External (Shaft) Dimensions (e11 through e6 and f10 through f5)

Dimensions in mm

BASIC SIZE	e11	e10	e9	e8	e7	e6	f10	f9	f8	f7	f6	f5
OVER 0	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006
TO 3	-0.074	-0.054	-0.039	-0.028	-0.024	-0.020	-0.046	-0.031	-0.020	-0.016	-0.012	-0.010
OVER 3	-0.020	-0.020	-0.020	-0.020	-0.020	-0.020	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010
TO 6	-0.095	-0.068	-0.050	-0.038	-0.032	-0.028	-0.058	-0.040	-0.028	-0.022	-0.018	-0.015
OVER 6	-0.025	-0.025	-0.025	-0.025	-0.025	-0.025	-0.013	-0.013	-0.013	-0.013	-0.013	-0.013
TO 10	-0.115	-0.083	-0.061	-0.047	-0.040	-0.034	-0.071	-0.049	-0.035	-0.028	-0.022	-0.019
OVER 10	-0.032	-0.032	-0.032	-0.032	-0.032	-0.032	-0.016	-0.016	-0.016	-0.016	-0.016	-0.016
TO 14	-0.142	-0.102	-0.075	-0.059	-0.050	-0.043	-0.086	-0.059	-0.043	-0.034	-0.027	-0.024
OVER 14	-0.032	-0.032	-0.032	-0.032	-0.032	-0.032	-0.016	-0.016	-0.016	-0.016	-0.016	-0.016
TO 18	-0.142	-0.102	-0.075	-0.059	-0.050	-0.043	-0.086	-0.059	-0.043	-0.034	-0.027	-0.024
OVER 18	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040	-0.020	-0.020	-0.020	-0.020	-0.020	-0.020
TO 24	-0.170	-0.124	-0.092	-0.073	-0.061	-0.053	-0.104	-0.072	-0.053	-0.041	-0.033	-0.029
OVER 24	-0.040	-0.040	-0.040	-0.040	-0.040	-0.040	-0.020	-0.020	-0.020	-0.020	-0.020	-0.020
TO 30	-0.170	-0.124	-0.092	-0.073	-0.061	-0.053	-0.104	-0.072	-0.053	-0.041	-0.033	-0.029
OVER 30	-0.050	-0.050	-0.050	-0.050	-0.050	-0.050	-0.025	-0.025	-0.025	-0.025	-0.025	-0.025
TO 40	-0.210	-0.150	-0.112	-0.089	-0.075	-0.066	-0.125	-0.087	-0.064	-0.050	-0.041	-0.036
OVER 40	-0.050	-0.050	-0.050	-0.050	-0.050	-0.050	-0.025	-0.025	-0.025	-0.025	-0.025	-0.025
TO 50	-0.210	-0.150	-0.112	-0.089	-0.075	-0.066	-0.125	-0.087	-0.064	-0.050	-0.041	-0.036
OVER 50	-0.060	-0.060	-0.060	-0.060	-0.060	-0.060	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030
TO 65	-0.250	-0.180	-0.134	-0.106	-0.090	-0.079	-0.150	-0.104	-0.076	-0.060	-0.049	-0.043
OVER 65	-0.060	-0.060	-0.060	-0.060	-0.060	-0.060	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030
TO 80	-0.250	-0.180	-0.134	-0.106	-0.090	-0.079	-0.150	-0.104	-0.076	-0.060	-0.049	-0.043
OVER 80	-0.072	-0.072	-0.072	-0.072	-0.072	-0.072	-0.036	-0.036	-0.036	-0.036	-0.036	-0.036
TO 100	-0.292	-0.212	-0.159	-0.126	-0.107	-0.094	-0.176	-0.123	-0.090	-0.071	-0.058	-0.051
OVER 100	-0.072	-0.072	-0.072	-0.072	-0.072	-0.072	-0.036	-0.036	-0.036	-0.036	-0.036	-0.036
TO 120	-0.292	-0.212	-0.159	-0.126	-0.107	-0.094	-0.176	-0.123	-0.090	-0.071	-0.058	-0.051
OVER 120	-0.085	-0.085	-0.085	-0.085	-0.085	-0.085	-0.043	-0.043	-0.043	-0.043	-0.043	-0.043
TO 140	-0.335	-0.245	-0.185	-0.148	-0.125	-0.110	-0.203	-0.143	-0.106	-0.083	-0.068	-0.061
OVER 140	-0.085	-0.085	-0.085	-0.085	-0.085	-0.085	-0.043	-0.043	-0.043	-0.043	-0.043	-0.043
TO 160	-0.335	-0.245	-0.185	-0.148	-0.125	-0.110	-0.203	-0.143	-0.106	-0.083	-0.068	-0.061
OVER 160	-0.085	-0.085	-0.085	-0.085	-0.085	-0.085	-0.043	-0.043	-0.043	-0.043	-0.043	-0.043
TO 180	-0.335	-0.245	-0.185	-0.148	-0.125	-0.110	-0.203	-0.143	-0.106	-0.083	-0.068	-0.061
OVER 180	-0.100	-0.100	-0.100	-0.100	-0.100	-0.100	-0.050	-0.050	-0.050	-0.050	-0.050	-0.050
TO 200	-0.390	-0.285	-0.215	-0.172	-0.146	-0.129	-0.235	-0.165	-0.122	-0.096	-0.079	-0.070
OVER 200	-0.100	-0.100	-0.100	-0.100	-0.100	-0.100	-0.050	-0.050	-0.050	-0.050	-0.050	-0.050
TO 225	-0.390	-0.285	-0.215	-0.172	-0.146	-0.129	-0.235	-0.165	-0.122	-0.096	-0.079	-0.070
OVER 225	-0.100	-0.100	-0.100	-0.100	-0.100	-0.100	-0.050	-0.050	-0.050	-0.050	-0.050	-0.050
TO 250	-0.390	-0.285	-0.215	-0.172	-0.146	-0.129	-0.235	-0.165	-0.122	-0.096	-0.079	-0.070
OVER 250	-0.110	-0.110	-0.110	-0.110	-0.110	-0.110	-0.056	-0.056	-0.056	-0.056	-0.056	-0.056
TO 280	-0.430	-0.320	-0.240	-0.191	-0.162	-0.142	-0.266	-0.186	-0.137	-0.108	-0.088	-0.079
OVER 280	-0.110	-0.110	-0.110	-0.110	-0.110	-0.110	-0.056	-0.056	-0.056	-0.056	-0.056	-0.056
TO 315	-0.430	-0.320	-0.240	-0.191	-0.162	-0.142	-0.266	-0.186	-0.137	-0.108	-0.088	-0.079
OVER 315	-0.125	-0.125	-0.125	-0.125	-0.125	-0.125	-0.062	-0.062	-0.062	-0.062	-0.062	-0.062
TO 355	-0.485	-0.355	-0.265	-0.214	-0.182	-0.161	-0.292	-0.202	-0.151	-0.119	-0.098	-0.087
OVER 355	-0.125	-0.125	-0.125	-0.125	-0.125	-0.125	-0.062	-0.062	-0.062	-0.062	-0.062	-0.062
TO 400	-0.485	-0.355	-0.265	-0.214	-0.182	-0.161	-0.292	-0.202	-0.151	-0.119	-0.098	-0.087
OVER 400	-0.135	-0.135	-0.135	-0.135	-0.135	-0.135	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068
TO 450	-0.535	-0.385	-0.290	-0.232	-0.198	-0.175	-0.318	-0.223	-0.165	-0.131	-0.108	-0.095
OVER 450	-0.135	-0.135	-0.135	-0.135	-0.135	-0.135	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068
TO 500	-0.535	-0.385	-0.290	-0.232	-0.198	-0.175	-0.318	-0.223	-0.165	-0.131	-0.108	-0.095

Table A16 Tolerance Zones for External (Shaft) Dimensions (g9 through g4 and j7 through j5)

Dimensions in mm

BASIC SIZE		g9	g8	g7	g6	g5	g4	j7	j6	j5
OVER	0	-0.002	-0.002	-0.002	-0.002	-0.002	-0.002	+0.006	+0.004	+0.002
TS	3	-0.027	-0.016	-0.012	-0.008	-0.006	-0.005	-0.004	-0.002	-0.002
OVER	3	-0.004	-0.004	-0.004	-0.004	-0.004	-0.004	+0.008	+0.006	+0.003
TS	6	-0.034	-0.022	-0.016	-0.012	-0.009	-0.008	-0.004	-0.002	-0.002
OVER	6	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	+0.010	+0.007	+0.004
TS	10	-0.041	-0.027	-0.020	-0.014	-0.011	-0.009	-0.005	-0.002	-0.002
OVER	10	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	+0.012	+0.008	+0.005
TS	14	-0.049	-0.033	-0.024	-0.017	-0.014	-0.011	-0.006	-0.003	-0.003
OVER	14	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	+0.012	+0.008	+0.005
TS	18	-0.049	-0.033	-0.024	-0.017	-0.014	-0.011	-0.006	-0.003	-0.003
OVER	18	-0.007	-0.007	-0.007	-0.007	-0.007	-0.007	+0.013	+0.009	+0.005
TS	24	-0.059	-0.040	-0.028	-0.020	-0.016	-0.013	-0.008	-0.004	-0.004
OVER	24	-0.007	-0.007	-0.007	-0.007	-0.007	-0.007	+0.013	+0.009	+0.005
TS	30	-0.059	-0.040	-0.028	-0.020	-0.016	-0.013	-0.008	-0.004	-0.004
OVER	30	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	+0.015	+0.011	+0.006
TS	40	-0.071	-0.048	-0.034	-0.025	-0.020	-0.016	-0.010	-0.005	-0.005
OVER	40	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	+0.015	+0.011	+0.006
TS	50	-0.071	-0.048	-0.034	-0.025	-0.020	-0.016	-0.010	-0.005	-0.005
OVER	50	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010	+0.018	+0.012	+0.006
TS	65	-0.084	-0.056	-0.040	-0.029	-0.023	-0.018	-0.012	-0.007	-0.007
OVER	65	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010	+0.018	+0.012	+0.006
TS	80	-0.084	-0.056	-0.040	-0.029	-0.023	-0.018	-0.012	-0.007	-0.007
OVER	80	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	+0.020	+0.013	+0.006
TS	100	-0.099	-0.066	-0.047	-0.034	-0.027	-0.022	-0.015	-0.009	-0.009
OVER	100	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	+0.020	+0.013	+0.006
TS	120	-0.099	-0.066	-0.047	-0.034	-0.027	-0.022	-0.015	-0.009	-0.009
OVER	120	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	+0.022	+0.014	+0.007
TS	140	-0.114	-0.077	-0.054	-0.039	-0.032	-0.026	-0.018	-0.011	-0.011
OVER	140	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	+0.022	+0.014	+0.007
TS	160	-0.114	-0.077	-0.054	-0.039	-0.032	-0.026	-0.018	-0.011	-0.011
OVER	160	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	+0.022	+0.014	+0.007
TS	180	-0.114	-0.077	-0.054	-0.039	-0.032	-0.026	-0.018	-0.011	-0.011
OVER	180	-0.015	-0.015	-0.015	-0.015	-0.015	-0.015	+0.025	+0.016	+0.007
TS	200	-0.130	-0.087	-0.061	-0.044	-0.035	-0.029	-0.021	-0.013	-0.013
OVER	200	-0.015	-0.015	-0.015	-0.015	-0.015	-0.015	+0.025	+0.016	+0.007
TS	225	-0.130	-0.087	-0.061	-0.044	-0.035	-0.029	-0.021	-0.013	-0.013
OVER	225	-0.015	-0.015	-0.015	-0.015	-0.015	-0.015	+0.025	+0.016	+0.007
TS	250	-0.130	-0.087	-0.061	-0.044	-0.035	-0.029	-0.021	-0.013	-0.013
OVER	250	-0.017	-0.017	-0.017	-0.017	-0.017	-0.017	+0.026	+0.016	+0.007
TS	280	-0.147	-0.098	-0.069	-0.049	-0.040	-0.033	-0.026	-0.016	-0.016
OVER	280	-0.017	-0.017	-0.017	-0.017	-0.017	-0.017	+0.026	+0.016	+0.007
TS	315	-0.147	-0.098	-0.069	-0.049	-0.040	-0.033	-0.026	-0.016	-0.016
OVER	315	-0.018	-0.018	-0.018	-0.018	-0.018	-0.018	+0.029	+0.018	+0.007
TS	355	-0.158	-0.107	-0.075	-0.054	-0.043	-0.036	-0.028	-0.018	-0.018
OVER	355	-0.018	-0.018	-0.018	-0.018	-0.018	-0.018	+0.029	+0.018	+0.007
TS	400	-0.158	-0.107	-0.075	-0.054	-0.043	-0.036	-0.028	-0.018	-0.018
OVER	400	-0.020	-0.020	-0.020	-0.020	-0.020	-0.020	+0.031	+0.020	+0.007
TS	450	-0.175	-0.117	-0.083	-0.060	-0.047	-0.040	-0.032	-0.020	-0.020
OVER	450	-0.020	-0.020	-0.020	-0.020	-0.020	-0.020	+0.031	+0.020	+0.007
TS	500	-0.175	-0.117	-0.083	-0.060	-0.047	-0.040	-0.032	-0.020	-0.020

abl A17 Tolerance Zones for External (Shaft) Dimensions (h16 through h1)

Dimensions in mm

BASIC SIZE	h16	h15	h14	h13	h12	h11	h10	h9	h8	h7	h6	h5	h4	h3	h2	h1
VER 0 T0 3	0.000 -0.600	0.000 -0.400	0.000 -0.250	0.000 -0.140	0.000 -0.100	0.000 -0.060	0.000 -0.040	0.000 -0.025	0.000 -0.014	0.000 -0.010	0.000 -0.006	0.000 -0.004	0.000 -0.003	0.000 -0.002	0.0000 -0.0012	0.0000 -0.0008
VER 3 T0 6	0.000 -0.750	0.000 -0.480	0.000 -0.300	0.000 -0.180	0.000 -0.120	0.000 -0.075	0.000 -0.048	0.000 -0.030	0.000 -0.018	0.000 -0.012	0.000 -0.008	0.000 -0.005	0.000 -0.004	0.0000 -0.0025	0.0000 -0.0015	0.000 -0.001
VER 6 T0 10	0.000 -0.900	0.000 -0.580	0.000 -0.360	0.000 -0.220	0.000 -0.150	0.000 -0.090	0.000 -0.058	0.000 -0.036	0.000 -0.022	0.000 -0.015	0.000 -0.009	0.000 -0.006	0.000 -0.004	0.0000 -0.0025	0.0000 -0.0015	0.000 -0.001
VER 10 T0 14	0.000 -1.100	0.000 -0.700	0.000 -0.430	0.000 -0.270	0.000 -0.180	0.000 -0.110	0.000 -0.070	0.000 -0.043	0.000 -0.027	0.000 -0.018	0.000 -0.011	0.000 -0.008	0.000 -0.005	0.000 -0.003	0.000 -0.002	0.0000 -0.0012
VER 14 T0 18	0.000 -1.100	0.000 -0.700	0.000 -0.430	0.000 -0.270	0.000 -0.180	0.000 -0.110	0.000 -0.070	0.000 -0.043	0.000 -0.027	0.000 -0.018	0.000 -0.011	0.000 -0.008	0.000 -0.005	0.000 -0.003	0.000 -0.002	0.0000 -0.0012
VER 18 T0 24	0.000 -1.300	0.000 -0.840	0.000 -0.520	0.000 -0.330	0.000 -0.210	0.000 -0.130	0.000 -0.084	0.000 -0.052	0.000 -0.033	0.000 -0.021	0.000 -0.013	0.000 -0.009	0.000 -0.006	0.000 -0.004	0.0000 -0.0025	0.0000 -0.0015
VER 24 T0 30	0.000 -1.300	0.000 -0.840	0.000 -0.520	0.000 -0.330	0.000 -0.210	0.000 -0.130	0.000 -0.084	0.000 -0.052	0.000 -0.033	0.000 -0.021	0.000 -0.013	0.000 -0.009	0.000 -0.006	0.000 -0.004	0.0000 -0.0025	0.0000 -0.0015
VER 30 T0 40	0.000 -1.600	0.000 -1.000	0.000 -0.620	0.000 -0.390	0.000 -0.250	0.000 -0.160	0.000 -0.100	0.000 -0.062	0.000 -0.039	0.000 -0.025	0.000 -0.016	0.000 -0.011	0.000 -0.007	0.000 -0.004	0.0000 -0.0025	0.0000 -0.0015
VER 40 T0 50	0.000 -1.600	0.000 -1.000	0.000 -0.620	0.000 -0.390	0.000 -0.250	0.000 -0.160	0.000 -0.100	0.000 -0.062	0.000 -0.039	0.000 -0.025	0.000 -0.016	0.000 -0.011	0.000 -0.007	0.000 -0.004	0.0000 -0.0025	0.0000 -0.0015
VER 50 T0 65	0.000 -1.900	0.000 -1.200	0.000 -0.740	0.000 -0.460	0.000 -0.300	0.000 -0.190	0.000 -0.120	0.000 -0.074	0.000 -0.046	0.000 -0.030	0.000 -0.019	0.000 -0.013	0.000 -0.008	0.000 -0.005	0.000 -0.003	0.000 -0.002
VER 65 T0 80	0.000 -1.900	0.000 -1.200	0.000 -0.740	0.000 -0.460	0.000 -0.300	0.000 -0.190	0.000 -0.120	0.000 -0.074	0.000 -0.046	0.000 -0.030	0.000 -0.019	0.000 -0.013	0.000 -0.008	0.000 -0.005	0.000 -0.003	0.000 -0.002
VER 80 T0 100	0.000 -2.200	0.000 -1.400	0.000 -0.870	0.000 -0.540	0.000 -0.350	0.000 -0.220	0.000 -0.140	0.000 -0.087	0.000 -0.054	0.000 -0.035	0.000 -0.022	0.000 -0.015	0.000 -0.010	0.000 -0.006	0.000 -0.004	0.0000 -0.0025
VER 100 T0 120	0.000 -2.200	0.000 -1.400	0.000 -0.870	0.000 -0.540	0.000 -0.350	0.000 -0.220	0.000 -0.140	0.000 -0.087	0.000 -0.054	0.000 -0.035	0.000 -0.022	0.000 -0.015	0.000 -0.010	0.000 -0.006	0.000 -0.004	0.0000 -0.0025
VER 120 T0 140	0.000 -2.500	0.000 -1.600	0.000 -1.000	0.000 -0.630	0.000 -0.400	0.000 -0.250	0.000 -0.160	0.000 -0.100	0.000 -0.063	0.000 -0.040	0.000 -0.025	0.000 -0.018	0.000 -0.012	0.000 -0.008	0.000 -0.005	0.0000 -0.0035
VER 140 T0 160	0.000 -2.500	0.000 -1.600	0.000 -1.000	0.000 -0.630	0.000 -0.400	0.000 -0.250	0.000 -0.160	0.000 -0.100	0.000 -0.063	0.000 -0.040	0.000 -0.025	0.000 -0.018	0.000 -0.012	0.000 -0.008	0.000 -0.005	0.0000 -0.0035
VER 160 T0 180	0.000 -2.500	0.000 -1.600	0.000 -1.000	0.000 -0.630	0.000 -0.400	0.000 -0.250	0.000 -0.160	0.000 -0.100	0.000 -0.063	0.000 -0.040	0.000 -0.025	0.000 -0.018	0.000 -0.012	0.000 -0.008	0.000 -0.005	0.0000 -0.0035
VER 180 T0 200	0.000 -2.900	0.000 -1.850	0.000 -1.150	0.000 -0.720	0.000 -0.460	0.000 -0.290	0.000 -0.185	0.000 -0.115	0.000 -0.072	0.000 -0.046	0.000 -0.029	0.000 -0.020	0.000 -0.014	0.000 -0.010	0.000 -0.007	0.0000 -0.0045
VER 200 T0 225	0.000 -2.900	0.000 -1.850	0.000 -1.150	0.000 -0.720	0.000 -0.460	0.000 -0.290	0.000 -0.185	0.000 -0.115	0.000 -0.072	0.000 -0.046	0.000 -0.029	0.000 -0.020	0.000 -0.014	0.000 -0.010	0.000 -0.007	0.0000 -0.0045
VER 225 T0 250	0.000 -2.900	0.000 -1.850	0.000 -1.150	0.000 -0.720	0.000 -0.460	0.000 -0.290	0.000 -0.185	0.000 -0.115	0.000 -0.072	0.000 -0.046	0.000 -0.029	0.000 -0.020	0.000 -0.014	0.000 -0.010	0.000 -0.007	0.0000 -0.0045
VER 250 T0 280	0.000 -3.200	0.000 -2.100	0.000 -1.300	0.000 -0.810	0.000 -0.520	0.000 -0.320	0.000 -0.210	0.000 -0.130	0.000 -0.081	0.000 -0.052	0.000 -0.032	0.000 -0.023	0.000 -0.016	0.000 -0.012	0.000 -0.008	0.000 -0.006
VER 280 T0 315	0.000 -3.200	0.000 -2.100	0.000 -1.300	0.000 -0.810	0.000 -0.520	0.000 -0.320	0.000 -0.210	0.000 -0.130	0.000 -0.081	0.000 -0.052	0.000 -0.032	0.000 -0.023	0.000 -0.016	0.000 -0.012	0.000 -0.008	0.000 -0.006
VER 315 T0 355	0.000 -3.600	0.000 -2.300	0.000 -1.400	0.000 -0.890	0.000 -0.570	0.000 -0.360	0.000 -0.230	0.000 -0.140	0.000 -0.089	0.000 -0.057	0.000 -0.036	0.000 -0.025	0.000 -0.018	0.000 -0.013	0.000 -0.009	0.000 -0.007
VER 355 T0 400	0.000 -3.600	0.000 -2.300	0.000 -1.400	0.000 -0.890	0.000 -0.570	0.000 -0.360	0.000 -0.230	0.000 -0.140	0.000 -0.089	0.000 -0.057	0.000 -0.036	0.000 -0.025	0.000 -0.018	0.000 -0.013	0.000 -0.009	0.000 -0.007
VER 400 T0 450	0.000 -4.000	0.000 -2.500	0.000 -1.550	0.000 -0.970	0.000 -0.630	0.000 -0.400	0.000 -0.250	0.000 -0.155	0.000 -0.097	0.000 -0.063	0.000 -0.040	0.000 -0.027	0.000 -0.020	0.000 -0.015	0.000 -0.010	0.000 -0.008
VER 450 T0 500	0.000 -4.000	0.000 -2.500	0.000 -1.550	0.000 -0.970	0.000 -0.630	0.000 -0.400	0.000 -0.250	0.000 -0.155	0.000 -0.097	0.000 -0.063	0.000 -0.040	0.000 -0.027	0.000 -0.020	0.000 -0.015	0.000 -0.010	0.000 -0.008

Table A18 Tolerance Zones for External (Shaft) Dimensions (js16 through js1)

Dimensions in mm

BASIC SIZE	js16	js15	js14	js13	js12	js11	js10	js9	js8	js7	js6	js5	js4	js3	js2	js1
OVER 0 TO 3	+0.300 -0.300	+0.200 -0.200	+0.125 -0.125	+0.070 -0.070	+0.050 -0.050	+0.030 -0.030	+0.020 -0.020	+0.012 -0.012	+0.007 -0.007	+0.005 -0.005	+0.003 -0.003	+0.002 -0.002	+0.0015 -0.0015	+0.001 -0.001	+0.0006 -0.0006	+0.0004 -0.0004
OVER 3 TO 6	+0.375 -0.375	+0.240 -0.240	+0.150 -0.150	+0.090 -0.090	+0.060 -0.060	+0.037 -0.037	+0.024 -0.024	+0.015 -0.015	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075	+0.0005 -0.0005
OVER 6 TO 10	+0.450 -0.450	+0.290 -0.290	+0.180 -0.180	+0.110 -0.110	+0.075 -0.075	+0.045 -0.045	+0.029 -0.029	+0.018 -0.018	+0.011 -0.011	+0.007 -0.007	+0.0045 -0.0045	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075	+0.0005 -0.0005
OVER 10 TO 14	+0.550 -0.550	+0.350 -0.350	+0.215 -0.215	+0.135 -0.135	+0.090 -0.090	+0.055 -0.055	+0.035 -0.035	+0.021 -0.021	+0.013 -0.013	+0.009 -0.009	+0.0055 -0.0055	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001	+0.0006 -0.0006
OVER 14 TO 18	+0.550 -0.550	+0.350 -0.350	+0.215 -0.215	+0.135 -0.135	+0.090 -0.090	+0.055 -0.055	+0.035 -0.035	+0.021 -0.021	+0.013 -0.013	+0.009 -0.009	+0.0055 -0.0055	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001	+0.0006 -0.0006
OVER 18 TO 24	+0.650 -0.650	+0.420 -0.420	+0.260 -0.260	+0.165 -0.165	+0.105 -0.105	+0.065 -0.065	+0.042 -0.042	+0.026 -0.026	+0.016 -0.016	+0.010 -0.010	+0.0065 -0.0065	+0.0045 -0.0045	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 24 TO 30	+0.650 -0.650	+0.420 -0.420	+0.260 -0.260	+0.165 -0.165	+0.105 -0.105	+0.065 -0.065	+0.042 -0.042	+0.026 -0.026	+0.016 -0.016	+0.010 -0.010	+0.0065 -0.0065	+0.0045 -0.0045	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 30 TO 40	+0.800 -0.800	+0.500 -0.500	+0.310 -0.310	+0.195 -0.195	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.019 -0.019	+0.012 -0.012	+0.008 -0.008	+0.0055 -0.0055	+0.0035 -0.0035	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 40 TO 50	+0.800 -0.800	+0.500 -0.500	+0.310 -0.310	+0.195 -0.195	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.019 -0.019	+0.012 -0.012	+0.008 -0.008	+0.0055 -0.0055	+0.0035 -0.0035	+0.002 -0.002	+0.00125 -0.00125	+0.00075 -0.00075
OVER 50 TO 65	+0.950 -0.950	+0.600 -0.600	+0.370 -0.370	+0.230 -0.230	+0.150 -0.150	+0.095 -0.095	+0.060 -0.060	+0.037 -0.037	+0.023 -0.023	+0.015 -0.015	+0.0095 -0.0095	+0.0065 -0.0065	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001
OVER 65 TO 80	+0.950 -0.950	+0.600 -0.600	+0.370 -0.370	+0.230 -0.230	+0.150 -0.150	+0.095 -0.095	+0.060 -0.060	+0.037 -0.037	+0.023 -0.023	+0.015 -0.015	+0.0095 -0.0095	+0.0065 -0.0065	+0.004 -0.004	+0.0025 -0.0025	+0.0015 -0.0015	+0.001 -0.001
OVER 80 TO 100	+1.100 -1.100	+0.700 -0.700	+0.435 -0.435	+0.270 -0.270	+0.175 -0.175	+0.110 -0.110	+0.070 -0.070	+0.043 -0.043	+0.027 -0.027	+0.017 -0.017	+0.011 -0.011	+0.0075 -0.0075	+0.005 -0.005	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125
OVER 100 TO 120	+1.100 -1.100	+0.700 -0.700	+0.435 -0.435	+0.270 -0.270	+0.175 -0.175	+0.110 -0.110	+0.070 -0.070	+0.043 -0.043	+0.027 -0.027	+0.017 -0.017	+0.011 -0.011	+0.0075 -0.0075	+0.005 -0.005	+0.003 -0.003	+0.002 -0.002	+0.00125 -0.00125
OVER 120 TO 140	+1.250 -1.250	+0.800 -0.800	+0.500 -0.500	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.020 -0.020	+0.0125 -0.0125	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.00175 -0.00175
OVER 140 TO 160	+1.250 -1.250	+0.800 -0.800	+0.500 -0.500	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.020 -0.020	+0.0125 -0.0125	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.00175 -0.00175
OVER 160 TO 180	+1.250 -1.250	+0.800 -0.800	+0.500 -0.500	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.080 -0.080	+0.050 -0.050	+0.031 -0.031	+0.020 -0.020	+0.0125 -0.0125	+0.009 -0.009	+0.006 -0.006	+0.004 -0.004	+0.0025 -0.0025	+0.00175 -0.00175
OVER 180 TO 200	+1.450 -1.450	+0.925 -0.925	+0.575 -0.575	+0.360 -0.360	+0.230 -0.230	+0.145 -0.145	+0.092 -0.092	+0.057 -0.057	+0.036 -0.036	+0.023 -0.023	+0.0145 -0.0145	+0.010 -0.010	+0.007 -0.007	+0.005 -0.005	+0.0035 -0.0035	+0.00225 -0.00225
OVER 200 TO 225	+1.450 -1.450	+0.925 -0.925	+0.575 -0.575	+0.360 -0.360	+0.230 -0.230	+0.145 -0.145	+0.092 -0.092	+0.057 -0.057	+0.036 -0.036	+0.023 -0.023	+0.0145 -0.0145	+0.010 -0.010	+0.007 -0.007	+0.005 -0.005	+0.0035 -0.0035	+0.00225 -0.00225
OVER 225 TO 250	+1.450 -1.450	+0.925 -0.925	+0.575 -0.575	+0.360 -0.360	+0.230 -0.230	+0.145 -0.145	+0.092 -0.092	+0.057 -0.057	+0.036 -0.036	+0.023 -0.023	+0.0145 -0.0145	+0.010 -0.010	+0.007 -0.007	+0.005 -0.005	+0.0035 -0.0035	+0.00225 -0.00225
OVER 250 TO 280	+1.600 -1.600	+1.050 -1.050	+0.650 -0.650	+0.405 -0.405	+0.260 -0.260	+0.160 -0.160	+0.105 -0.105	+0.065 -0.065	+0.040 -0.040	+0.026 -0.026	+0.016 -0.016	+0.0115 -0.0115	+0.008 -0.008	+0.006 -0.006	+0.004 -0.004	+0.003 -0.003
OVER 280 TO 315	+1.600 -1.600	+1.050 -1.050	+0.650 -0.650	+0.405 -0.405	+0.260 -0.260	+0.160 -0.160	+0.105 -0.105	+0.065 -0.065	+0.040 -0.040	+0.026 -0.026	+0.016 -0.016	+0.0115 -0.0115	+0.008 -0.008	+0.006 -0.006	+0.004 -0.004	+0.003 -0.003
OVER 315 TO 355	+1.800 -1.800	+1.150 -1.150	+0.700 -0.700	+0.445 -0.445	+0.285 -0.285	+0.180 -0.180	+0.115 -0.115	+0.070 -0.070	+0.044 -0.044	+0.028 -0.028	+0.018 -0.018	+0.0125 -0.0125	+0.009 -0.009	+0.0065 -0.0065	+0.0045 -0.0045	+0.0035 -0.0035
OVER 355 TO 400	+1.800 -1.800	+1.150 -1.150	+0.700 -0.700	+0.445 -0.445	+0.285 -0.285	+0.180 -0.180	+0.115 -0.115	+0.070 -0.070	+0.044 -0.044	+0.028 -0.028	+0.018 -0.018	+0.0125 -0.0125	+0.009 -0.009	+0.0065 -0.0065	+0.0045 -0.0045	+0.0035 -0.0035
OVER 400 TO 450	+2.000 -2.000	+1.250 -1.250	+0.775 -0.775	+0.485 -0.485	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.077 -0.077	+0.048 -0.048	+0.031 -0.031	+0.020 -0.020	+0.0135 -0.0135	+0.010 -0.010	+0.0075 -0.0075	+0.005 -0.005	+0.004 -0.004
OVER 450 TO 500	+2.000 -2.000	+1.250 -1.250	+0.775 -0.775	+0.485 -0.485	+0.315 -0.315	+0.200 -0.200	+0.125 -0.125	+0.077 -0.077	+0.048 -0.048	+0.031 -0.031	+0.020 -0.020	+0.0135 -0.0135	+0.010 -0.010	+0.0075 -0.0075	+0.005 -0.005	+0.004 -0.004

Note: Some js deviations in the grades 7 to 11 have been rounded off to 1/2 (IT - 0.001) when the IT value is odd.

Table A19 Tolerance Zones for External (Shaft) Dimensions (k9 through k4 and m9 through m4)

Dimensions in mm

BASIC SIZE	k9	k8	k7	k6	k5	k4	m9	m8	m7	m6	m5	m4
OVER 0 TO 3	+0.025 0.000	+0.014 0.000	+0.010 0.000	+0.006 0.000	+0.004 0.000	+0.003 0.000	+0.027 +0.002	+0.016 +0.002	+0.012 +0.002	+0.008 +0.002	+0.006 +0.002	+0.005 +0.002
OVER 3 TO 6	+0.030 0.000	+0.018 0.000	+0.013 +0.001	+0.009 +0.001	+0.006 +0.001	+0.005 +0.001	+0.034 +0.004	+0.022 +0.004	+0.016 +0.004	+0.012 +0.004	+0.009 +0.004	+0.008 +0.004
OVER 6 TO 10	+0.036 0.000	+0.022 0.000	+0.016 +0.001	+0.010 +0.001	+0.007 +0.001	+0.005 +0.001	+0.042 +0.006	+0.028 +0.006	+0.021 +0.006	+0.015 +0.006	+0.012 +0.006	+0.010 +0.006
OVER 10 TO 14	+0.043 0.000	+0.027 0.000	+0.019 +0.001	+0.012 +0.001	+0.009 +0.001	+0.006 +0.001	+0.050 +0.007	+0.034 +0.007	+0.025 +0.007	+0.018 +0.007	+0.015 +0.007	+0.012 +0.007
OVER 14 TO 18	+0.043 0.000	+0.027 0.000	+0.019 +0.001	+0.012 +0.001	+0.009 +0.001	+0.006 +0.001	+0.050 +0.007	+0.034 +0.007	+0.025 +0.007	+0.018 +0.007	+0.015 +0.007	+0.012 +0.007
OVER 18 TO 24	+0.052 0.000	+0.033 0.000	+0.023 +0.002	+0.015 +0.002	+0.011 +0.002	+0.008 +0.002	+0.060 +0.008	+0.041 +0.008	+0.029 +0.008	+0.021 +0.008	+0.017 +0.008	+0.014 +0.008
OVER 24 TO 30	+0.052 0.000	+0.033 0.000	+0.023 +0.002	+0.015 +0.002	+0.011 +0.002	+0.008 +0.002	+0.060 +0.008	+0.041 +0.008	+0.029 +0.008	+0.021 +0.008	+0.017 +0.008	+0.014 +0.008
OVER 30 TO 40	+0.062 0.000	+0.039 0.000	+0.027 +0.002	+0.018 +0.002	+0.013 +0.002	+0.009 +0.002	+0.071 +0.009	+0.048 +0.009	+0.034 +0.009	+0.025 +0.009	+0.020 +0.009	+0.016 +0.009
OVER 40 TO 50	+0.062 0.000	+0.039 0.000	+0.027 +0.002	+0.018 +0.002	+0.013 +0.002	+0.009 +0.002	+0.071 +0.009	+0.048 +0.009	+0.034 +0.009	+0.025 +0.009	+0.020 +0.009	+0.016 +0.009
OVER 50 TO 65	+0.074 0.000	+0.046 0.000	+0.032 +0.002	+0.021 +0.002	+0.015 +0.002	+0.010 +0.002	+0.085 +0.011	+0.057 +0.011	+0.041 +0.011	+0.030 +0.011	+0.024 +0.011	+0.019 +0.011
OVER 65 TO 80	+0.074 0.000	+0.046 0.000	+0.032 +0.002	+0.021 +0.002	+0.015 +0.002	+0.010 +0.002	+0.085 +0.011	+0.057 +0.011	+0.041 +0.011	+0.030 +0.011	+0.024 +0.011	+0.019 +0.011
OVER 80 TO 100	+0.087 0.000	+0.054 0.000	+0.038 +0.003	+0.025 +0.003	+0.018 +0.003	+0.013 +0.003	+0.100 +0.013	+0.067 +0.013	+0.048 +0.013	+0.035 +0.013	+0.028 +0.013	+0.023 +0.013
OVER 100 TO 120	+0.087 0.000	+0.054 0.000	+0.038 +0.003	+0.025 +0.003	+0.018 +0.003	+0.013 +0.003	+0.100 +0.013	+0.067 +0.013	+0.048 +0.013	+0.035 +0.013	+0.028 +0.013	+0.023 +0.013
OVER 120 TO 140	+0.100 0.000	+0.063 0.000	+0.043 +0.003	+0.028 +0.003	+0.021 +0.003	+0.015 +0.003	+0.115 +0.015	+0.078 +0.015	+0.055 +0.015	+0.040 +0.015	+0.033 +0.015	+0.027 +0.015
OVER 140 TO 160	+0.100 0.000	+0.063 0.000	+0.043 +0.003	+0.028 +0.003	+0.021 +0.003	+0.015 +0.003	+0.115 +0.015	+0.078 +0.015	+0.055 +0.015	+0.040 +0.015	+0.033 +0.015	+0.027 +0.015
OVER 160 TO 180	+0.100 0.000	+0.063 0.000	+0.043 +0.003	+0.028 +0.003	+0.021 +0.003	+0.015 +0.003	+0.115 +0.015	+0.078 +0.015	+0.055 +0.015	+0.040 +0.015	+0.033 +0.015	+0.027 +0.015
OVER 180 TO 200	+0.115 0.000	+0.072 0.000	+0.050 +0.004	+0.033 +0.004	+0.024 +0.004	+0.018 +0.004	+0.132 +0.017	+0.089 +0.017	+0.063 +0.017	+0.046 +0.017	+0.037 +0.017	+0.031 +0.017
OVER 200 TO 225	+0.115 0.000	+0.072 0.000	+0.050 +0.004	+0.033 +0.004	+0.024 +0.004	+0.018 +0.004	+0.132 +0.017	+0.089 +0.017	+0.063 +0.017	+0.046 +0.017	+0.037 +0.017	+0.031 +0.017
OVER 225 TO 250	+0.115 0.000	+0.072 0.000	+0.050 +0.004	+0.033 +0.004	+0.024 +0.004	+0.018 +0.004	+0.132 +0.017	+0.089 +0.017	+0.063 +0.017	+0.046 +0.017	+0.037 +0.017	+0.031 +0.017
OVER 250 TO 280	+0.130 0.000	+0.081 0.000	+0.056 +0.004	+0.036 +0.004	+0.027 +0.004	+0.020 +0.004	+0.150 +0.020	+0.101 +0.020	+0.072 +0.020	+0.052 +0.020	+0.043 +0.020	+0.036 +0.020
OVER 280 TO 315	+0.130 0.000	+0.081 0.000	+0.056 +0.004	+0.036 +0.004	+0.027 +0.004	+0.020 +0.004	+0.150 +0.020	+0.101 +0.020	+0.072 +0.020	+0.052 +0.020	+0.043 +0.020	+0.036 +0.020
OVER 315 TO 355	+0.140 0.000	+0.089 0.000	+0.061 +0.004	+0.040 +0.004	+0.029 +0.004	+0.022 +0.004	+0.161 +0.021	+0.110 +0.021	+0.078 +0.021	+0.057 +0.021	+0.046 +0.021	+0.039 +0.021
OVER 355 TO 400	+0.140 0.000	+0.089 0.000	+0.061 +0.004	+0.040 +0.004	+0.029 +0.004	+0.022 +0.004	+0.161 +0.021	+0.110 +0.021	+0.078 +0.021	+0.057 +0.021	+0.046 +0.021	+0.039 +0.021
OVER 400 TO 450	+0.155 0.000	+0.097 0.000	+0.068 +0.005	+0.045 +0.005	+0.032 +0.005	+0.025 +0.005	+0.178 +0.023	+0.120 +0.023	+0.086 +0.023	+0.063 +0.023	+0.050 +0.023	+0.043 +0.023
OVER 450 TO 500	+0.155 0.000	+0.097 0.000	+0.068 +0.005	+0.045 +0.005	+0.032 +0.005	+0.025 +0.005	+0.178 +0.023	+0.120 +0.023	+0.086 +0.023	+0.063 +0.023	+0.050 +0.023	+0.043 +0.023

Table A20 Tolerance Zones for External (Shaft) Dimensions (n9 through n4 and p9 through p4)

Dimensions in mm

BASIC SIZE	n9	n8	n7	n6	n5	n4	p9	p8	p7	p6	p5	p4
OVER 0 TO 3	+0.029 +0.004	+0.018 +0.004	+0.014 +0.004	+0.010 +0.004	+0.008 +0.004	+0.007 +0.004	+0.031 +0.006	+0.020 +0.006	+0.016 +0.006	+0.012 +0.006	+0.010 +0.006	+0.009 +0.006
OVER 3 TO 6	+0.038 +0.008	+0.026 +0.008	+0.020 +0.008	+0.016 +0.008	+0.013 +0.008	+0.012 +0.008	+0.042 +0.012	+0.030 +0.012	+0.024 +0.012	+0.020 +0.012	+0.017 +0.012	+0.016 +0.012
OVER 6 TO 10	+0.046 +0.010	+0.032 +0.010	+0.025 +0.010	+0.019 +0.010	+0.016 +0.010	+0.014 +0.010	+0.051 +0.015	+0.037 +0.015	+0.030 +0.015	+0.024 +0.015	+0.021 +0.015	+0.019 +0.015
OVER 10 TO 14	+0.055 +0.012	+0.039 +0.012	+0.030 +0.012	+0.023 +0.012	+0.020 +0.012	+0.017 +0.012	+0.061 +0.018	+0.045 +0.018	+0.036 +0.018	+0.029 +0.018	+0.026 +0.018	+0.023 +0.018
OVER 14 TO 18	+0.055 +0.012	+0.039 +0.012	+0.030 +0.012	+0.023 +0.012	+0.020 +0.012	+0.017 +0.012	+0.061 +0.018	+0.045 +0.018	+0.036 +0.018	+0.029 +0.018	+0.026 +0.018	+0.023 +0.018
OVER 18 TO 24	+0.067 +0.015	+0.048 +0.015	+0.036 +0.015	+0.028 +0.015	+0.024 +0.015	+0.021 +0.015	+0.074 +0.022	+0.055 +0.022	+0.043 +0.022	+0.035 +0.022	+0.031 +0.022	+0.028 +0.022
OVER 24 TO 30	+0.067 +0.015	+0.048 +0.015	+0.036 +0.015	+0.028 +0.015	+0.024 +0.015	+0.021 +0.015	+0.074 +0.022	+0.055 +0.022	+0.043 +0.022	+0.035 +0.022	+0.031 +0.022	+0.028 +0.022
OVER 30 TO 40	+0.079 +0.017	+0.056 +0.017	+0.042 +0.017	+0.033 +0.017	+0.028 +0.017	+0.024 +0.017	+0.088 +0.026	+0.065 +0.026	+0.051 +0.026	+0.042 +0.026	+0.037 +0.026	+0.033 +0.026
OVER 40 TO 50	+0.079 +0.017	+0.056 +0.017	+0.042 +0.017	+0.033 +0.017	+0.028 +0.017	+0.024 +0.017	+0.088 +0.026	+0.065 +0.026	+0.051 +0.026	+0.042 +0.026	+0.037 +0.026	+0.033 +0.026
OVER 50 TO 65	+0.094 +0.020	+0.066 +0.020	+0.050 +0.020	+0.039 +0.020	+0.033 +0.020	+0.028 +0.020	+0.106 +0.032	+0.078 +0.032	+0.062 +0.032	+0.051 +0.032	+0.045 +0.032	+0.040 +0.032
OVER 65 TO 80	+0.094 +0.020	+0.066 +0.020	+0.050 +0.020	+0.039 +0.020	+0.033 +0.020	+0.028 +0.020	+0.106 +0.032	+0.078 +0.032	+0.062 +0.032	+0.051 +0.032	+0.045 +0.032	+0.040 +0.032
OVER 80 TO 100	+0.110 +0.023	+0.077 +0.023	+0.058 +0.023	+0.045 +0.023	+0.038 +0.023	+0.033 +0.023	+0.124 +0.037	+0.091 +0.037	+0.072 +0.037	+0.059 +0.037	+0.052 +0.037	+0.047 +0.037
OVER 100 TO 120	+0.110 +0.023	+0.077 +0.023	+0.058 +0.023	+0.045 +0.023	+0.038 +0.023	+0.033 +0.023	+0.124 +0.037	+0.091 +0.037	+0.072 +0.037	+0.059 +0.037	+0.052 +0.037	+0.047 +0.037
OVER 120 TO 140	+0.127 +0.027	+0.090 +0.027	+0.067 +0.027	+0.052 +0.027	+0.045 +0.027	+0.039 +0.027	+0.143 +0.043	+0.106 +0.043	+0.083 +0.043	+0.068 +0.043	+0.061 +0.043	+0.055 +0.043
OVER 140 TO 160	+0.127 +0.027	+0.090 +0.027	+0.067 +0.027	+0.052 +0.027	+0.045 +0.027	+0.039 +0.027	+0.143 +0.043	+0.106 +0.043	+0.083 +0.043	+0.068 +0.043	+0.061 +0.043	+0.055 +0.043
OVER 160 TO 180	+0.127 +0.027	+0.090 +0.027	+0.067 +0.027	+0.052 +0.027	+0.045 +0.027	+0.039 +0.027	+0.143 +0.043	+0.106 +0.043	+0.083 +0.043	+0.068 +0.043	+0.061 +0.043	+0.055 +0.043
OVER 180 TO 200	+0.146 +0.031	+0.103 +0.031	+0.077 +0.031	+0.060 +0.031	+0.051 +0.031	+0.045 +0.031	+0.165 +0.050	+0.122 +0.050	+0.096 +0.050	+0.079 +0.050	+0.070 +0.050	+0.064 +0.050
OVER 200 TO 225	+0.146 +0.031	+0.103 +0.031	+0.077 +0.031	+0.060 +0.031	+0.051 +0.031	+0.045 +0.031	+0.165 +0.050	+0.122 +0.050	+0.096 +0.050	+0.079 +0.050	+0.070 +0.050	+0.064 +0.050
OVER 225 TO 250	+0.146 +0.031	+0.103 +0.031	+0.077 +0.031	+0.060 +0.031	+0.051 +0.031	+0.045 +0.031	+0.165 +0.050	+0.122 +0.050	+0.096 +0.050	+0.079 +0.050	+0.070 +0.050	+0.064 +0.050
OVER 250 TO 280	+0.164 +0.034	+0.115 +0.034	+0.086 +0.034	+0.066 +0.034	+0.057 +0.034	+0.050 +0.034	+0.186 +0.056	+0.137 +0.056	+0.108 +0.056	+0.088 +0.056	+0.079 +0.056	+0.072 +0.056
OVER 280 TO 315	+0.164 +0.034	+0.115 +0.034	+0.086 +0.034	+0.066 +0.034	+0.057 +0.034	+0.050 +0.034	+0.186 +0.056	+0.137 +0.056	+0.108 +0.056	+0.088 +0.056	+0.079 +0.056	+0.072 +0.056
OVER 315 TO 355	+0.177 +0.037	+0.126 +0.037	+0.094 +0.037	+0.073 +0.037	+0.062 +0.037	+0.055 +0.037	+0.202 +0.062	+0.151 +0.062	+0.119 +0.062	+0.098 +0.062	+0.087 +0.062	+0.080 +0.062
OVER 355 TO 400	+0.177 +0.037	+0.126 +0.037	+0.094 +0.037	+0.073 +0.037	+0.062 +0.037	+0.055 +0.037	+0.202 +0.062	+0.151 +0.062	+0.119 +0.062	+0.098 +0.062	+0.087 +0.062	+0.080 +0.062
OVER 400 TO 450	+0.195 +0.040	+0.137 +0.040	+0.103 +0.040	+0.080 +0.040	+0.067 +0.040	+0.060 +0.040	+0.223 +0.068	+0.165 +0.068	+0.131 +0.068	+0.108 +0.068	+0.095 +0.068	+0.088 +0.068
OVER 450 TO 500	+0.195 +0.040	+0.137 +0.040	+0.103 +0.040	+0.080 +0.040	+0.067 +0.040	+0.060 +0.040	+0.223 +0.068	+0.165 +0.068	+0.131 +0.068	+0.108 +0.068	+0.095 +0.068	+0.088 +0.068

Table A21 Tolerance Zones for External (Shaft) Dimensions (r9 through r4 and s9 through s4)

Dimensions in mm

BASIC SIZE	r9	r8	r7	r6	r5	r4	s9	s8	s7	s6	s5	s4
OVER 0 TO 3	+0.035 +0.010	+0.024 +0.010	+0.020 +0.010	+0.016 +0.010	+0.014 +0.010	+0.013 +0.010	+0.039 +0.014	+0.028 +0.014	+0.024 +0.014	+0.020 +0.014	+0.018 +0.014	+0.017 +0.014
OVER 3 TO 6	+0.045 +0.015	+0.033 +0.015	+0.027 +0.015	+0.023 +0.015	+0.020 +0.015	+0.019 +0.015	+0.049 +0.019	+0.037 +0.019	+0.031 +0.019	+0.027 +0.019	+0.024 +0.019	+0.023 +0.019
OVER 6 TO 10	+0.055 +0.019	+0.041 +0.019	+0.034 +0.019	+0.028 +0.019	+0.025 +0.019	+0.023 +0.019	+0.059 +0.023	+0.045 +0.023	+0.038 +0.023	+0.032 +0.023	+0.029 +0.023	+0.027 +0.023
OVER 10 TO 14	+0.066 +0.023	+0.050 +0.023	+0.041 +0.023	+0.034 +0.023	+0.031 +0.023	+0.028 +0.023	+0.071 +0.028	+0.055 +0.028	+0.046 +0.028	+0.039 +0.028	+0.036 +0.028	+0.033 +0.028
OVER 14 TO 18	+0.066 +0.023	+0.050 +0.023	+0.041 +0.023	+0.034 +0.023	+0.031 +0.023	+0.028 +0.023	+0.071 +0.028	+0.055 +0.028	+0.046 +0.028	+0.039 +0.028	+0.036 +0.028	+0.033 +0.028
OVER 18 TO 24	+0.080 +0.028	+0.061 +0.028	+0.049 +0.028	+0.041 +0.028	+0.037 +0.028	+0.034 +0.028	+0.087 +0.035	+0.068 +0.035	+0.056 +0.035	+0.048 +0.035	+0.044 +0.035	+0.041 +0.035
OVER 24 TO 30	+0.080 +0.028	+0.061 +0.028	+0.049 +0.028	+0.041 +0.028	+0.037 +0.028	+0.034 +0.028	+0.087 +0.035	+0.068 +0.035	+0.056 +0.035	+0.048 +0.035	+0.044 +0.035	+0.041 +0.035
OVER 30 TO 40	+0.096 +0.034	+0.073 +0.034	+0.059 +0.034	+0.050 +0.034	+0.045 +0.034	+0.041 +0.034	+0.105 +0.043	+0.082 +0.043	+0.068 +0.043	+0.059 +0.043	+0.054 +0.043	+0.050 +0.043
OVER 40 TO 50	+0.096 +0.034	+0.073 +0.034	+0.059 +0.034	+0.050 +0.034	+0.045 +0.034	+0.041 +0.034	+0.105 +0.043	+0.082 +0.043	+0.068 +0.043	+0.059 +0.043	+0.054 +0.043	+0.050 +0.043
OVER 50 TO 65	+0.115 +0.041	+0.087 +0.041	+0.071 +0.041	+0.060 +0.041	+0.054 +0.041	+0.049 +0.041	+0.127 +0.053	+0.099 +0.053	+0.083 +0.053	+0.072 +0.053	+0.066 +0.053	+0.061 +0.053
OVER 65 TO 80	+0.117 +0.043	+0.089 +0.043	+0.073 +0.043	+0.062 +0.043	+0.056 +0.043	+0.051 +0.043	+0.133 +0.059	+0.105 +0.059	+0.089 +0.059	+0.078 +0.059	+0.072 +0.059	+0.067 +0.059
OVER 80 TO 100	+0.138 +0.051	+0.105 +0.051	+0.086 +0.051	+0.073 +0.051	+0.066 +0.051	+0.061 +0.051	+0.158 +0.071	+0.125 +0.071	+0.106 +0.071	+0.093 +0.071	+0.086 +0.071	+0.081 +0.071
OVER 100 TO 120	+0.141 +0.054	+0.108 +0.054	+0.089 +0.054	+0.076 +0.054	+0.069 +0.054	+0.064 +0.054	+0.166 +0.079	+0.133 +0.079	+0.114 +0.079	+0.101 +0.079	+0.094 +0.079	+0.089 +0.079
OVER 120 TO 140	+0.163 +0.063	+0.126 +0.063	+0.103 +0.063	+0.088 +0.063	+0.081 +0.063	+0.075 +0.063	+0.192 +0.092	+0.155 +0.092	+0.132 +0.092	+0.117 +0.092	+0.110 +0.092	+0.104 +0.092
OVER 140 TO 160	+0.165 +0.065	+0.128 +0.065	+0.105 +0.065	+0.090 +0.065	+0.083 +0.065	+0.077 +0.065	+0.200 +0.100	+0.163 +0.100	+0.140 +0.100	+0.125 +0.100	+0.118 +0.100	+0.112 +0.100
OVER 160 TO 180	+0.168 +0.068	+0.131 +0.068	+0.108 +0.068	+0.093 +0.068	+0.086 +0.068	+0.080 +0.068	+0.208 +0.108	+0.171 +0.108	+0.148 +0.108	+0.133 +0.108	+0.126 +0.108	+0.120 +0.108
OVER 180 TO 200	+0.192 +0.077	+0.149 +0.077	+0.123 +0.077	+0.106 +0.077	+0.097 +0.077	+0.091 +0.077	+0.237 +0.122	+0.194 +0.122	+0.168 +0.122	+0.151 +0.122	+0.142 +0.122	+0.136 +0.122
OVER 200 TO 225	+0.195 +0.080	+0.152 +0.080	+0.126 +0.080	+0.109 +0.080	+0.100 +0.080	+0.094 +0.080	+0.245 +0.130	+0.202 +0.130	+0.176 +0.130	+0.159 +0.130	+0.150 +0.130	+0.144 +0.130
OVER 225 TO 250	+0.199 +0.084	+0.156 +0.084	+0.130 +0.084	+0.113 +0.084	+0.104 +0.084	+0.098 +0.084	+0.255 +0.140	+0.212 +0.140	+0.186 +0.140	+0.169 +0.140	+0.160 +0.140	+0.154 +0.140
OVER 250 TO 280	+0.224 +0.094	+0.175 +0.094	+0.146 +0.094	+0.126 +0.094	+0.117 +0.094	+0.110 +0.094	+0.288 +0.158	+0.239 +0.158	+0.210 +0.158	+0.190 +0.158	+0.181 +0.158	+0.174 +0.158
OVER 280 TO 315	+0.228 +0.098	+0.179 +0.098	+0.150 +0.098	+0.130 +0.098	+0.121 +0.098	+0.114 +0.098	+0.300 +0.170	+0.251 +0.170	+0.222 +0.170	+0.202 +0.170	+0.193 +0.170	+0.186 +0.170
OVER 315 TO 355	+0.248 +0.108	+0.197 +0.108	+0.165 +0.108	+0.144 +0.108	+0.133 +0.108	+0.126 +0.108	+0.330 +0.190	+0.279 +0.190	+0.247 +0.190	+0.226 +0.190	+0.215 +0.190	+0.208 +0.190
OVER 355 TO 400	+0.254 +0.114	+0.203 +0.114	+0.171 +0.114	+0.150 +0.114	+0.139 +0.114	+0.132 +0.114	+0.348 +0.208	+0.297 +0.208	+0.265 +0.208	+0.244 +0.208	+0.233 +0.208	+0.226 +0.208
OVER 400 TO 450	+0.281 +0.126	+0.223 +0.126	+0.189 +0.126	+0.166 +0.126	+0.153 +0.126	+0.146 +0.126	+0.387 +0.232	+0.329 +0.232	+0.295 +0.232	+0.272 +0.232	+0.259 +0.232	+0.252 +0.232
OVER 450 TO 500	+0.287 +0.132	+0.229 +0.132	+0.195 +0.132	+0.172 +0.132	+0.159 +0.132	+0.152 +0.132	+0.407 +0.252	+0.349 +0.252	+0.315 +0.252	+0.292 +0.252	+0.279 +0.252	+0.272 +0.252

Table A22 Tolerance Zones for External (Shaft) Dimensions (t9 through t4 and u9 through u4)

Dimensions in mm

BASIC SIZE	t9	t8	t7	t6	t5	t4	u9	u8	u7	u6	u5	u4						
OVER 0 T0 3	NUMERICAL VALUES FOR TOLERANCE ZONES IN THIS AREA NOT DEFINED.						+0.043	+0.032	+0.028	+0.024	+0.022	+0.021	+0.021					
OVER 3 T0 6							+0.053	+0.041	+0.035	+0.031	+0.028	+0.027	+0.023	+0.023	+0.023	+0.023	+0.023	+0.023
OVER 6 T0 10							+0.064	+0.050	+0.043	+0.037	+0.034	+0.032	+0.028	+0.028	+0.028	+0.028	+0.028	+0.028
OVER 10 T0 14							+0.076	+0.060	+0.051	+0.044	+0.041	+0.038	+0.033	+0.033	+0.033	+0.033	+0.033	+0.033
OVER 14 T0 18							+0.076	+0.060	+0.051	+0.044	+0.041	+0.038	+0.033	+0.033	+0.033	+0.033	+0.033	+0.033
OVER 18 T0 24							+0.093	+0.074	+0.062	+0.054	+0.050	+0.047	+0.041	+0.041	+0.041	+0.041	+0.041	+0.041
OVER 24 T0 30	+0.093	+0.074	+0.062	+0.054	+0.050	+0.047	+0.048	+0.048	+0.048	+0.048	+0.048	+0.048						
OVER 30 T0 40	+0.110	+0.087	+0.073	+0.064	+0.059	+0.055	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060						
OVER 40 T0 50	+0.116	+0.093	+0.079	+0.070	+0.065	+0.061	+0.070	+0.070	+0.070	+0.070	+0.070	+0.070						
OVER 50 T0 65	+0.140	+0.112	+0.096	+0.085	+0.079	+0.074	+0.087	+0.087	+0.087	+0.087	+0.087	+0.087						
OVER 65 T0 80	+0.149	+0.121	+0.105	+0.094	+0.088	+0.083	+0.102	+0.102	+0.102	+0.102	+0.102	+0.102						
OVER 80 T0 100	+0.178	+0.145	+0.126	+0.113	+0.106	+0.101	+0.124	+0.124	+0.124	+0.124	+0.124	+0.124						
OVER 100 T0 120	+0.191	+0.158	+0.139	+0.126	+0.119	+0.114	+0.144	+0.144	+0.144	+0.144	+0.144	+0.144						
OVER 120 T0 140	+0.222	+0.185	+0.162	+0.147	+0.140	+0.134	+0.170	+0.170	+0.170	+0.170	+0.170	+0.170						
OVER 140 T0 160	+0.234	+0.197	+0.174	+0.159	+0.152	+0.146	+0.190	+0.190	+0.190	+0.190	+0.190	+0.190						
OVER 160 T0 180	+0.246	+0.209	+0.186	+0.171	+0.164	+0.158	+0.210	+0.210	+0.210	+0.210	+0.210	+0.210						
OVER 180 T0 200	+0.281	+0.238	+0.212	+0.195	+0.186	+0.180	+0.236	+0.236	+0.236	+0.236	+0.236	+0.236						
OVER 200 T0 225	+0.295	+0.252	+0.226	+0.209	+0.200	+0.194	+0.258	+0.258	+0.258	+0.258	+0.258	+0.258						
OVER 225 T0 250	+0.311	+0.268	+0.242	+0.225	+0.216	+0.210	+0.284	+0.284	+0.284	+0.284	+0.284	+0.284						
OVER 250 T0 280	+0.348	+0.299	+0.270	+0.250	+0.241	+0.234	+0.315	+0.315	+0.315	+0.315	+0.315	+0.315						
OVER 280 T0 315	+0.370	+0.321	+0.292	+0.272	+0.263	+0.256	+0.350	+0.350	+0.350	+0.350	+0.350	+0.350						
OVER 315 T0 355	+0.408	+0.357	+0.325	+0.304	+0.293	+0.286	+0.390	+0.390	+0.390	+0.390	+0.390	+0.390						
OVER 355 T0 400	+0.434	+0.383	+0.351	+0.330	+0.319	+0.312	+0.435	+0.435	+0.435	+0.435	+0.435	+0.435						
OVER 400 T0 450	+0.485	+0.427	+0.393	+0.370	+0.357	+0.350	+0.490	+0.490	+0.490	+0.490	+0.490	+0.490						
OVER 450 T0 500	+0.515	+0.457	+0.423	+0.400	+0.387	+0.380	+0.540	+0.540	+0.540	+0.540	+0.540	+0.540						

Table A23 Tolerance Zones for External (Shaft) Dimensions (v9 through v4 and x9 through x4)

Dimensions in μm

BASIC SIZE	v9	v8	v7	v6	v5	v4	x9	x8	x7	x6	x5	x4	
OVER 0 TØ 3	NUMERICAL VALUES FOR TOLERANCE ZONES IN THIS AREA NOT DEFINED.						+0.045	+0.034	+0.030	+0.026	+0.024	+0.023	+0.023
OVER 3 TØ 6							+0.054	+0.046	+0.040	+0.036	+0.033	+0.032	
OVER 6 TØ 10							+0.070	+0.056	+0.049	+0.043	+0.040	+0.038	
OVER 10 TØ 14							+0.083	+0.067	+0.058	+0.051	+0.048	+0.045	
OVER 14 TØ 18	+0.082	+0.066	+0.057	+0.050	+0.047	+0.044	+0.084	+0.072	+0.063	+0.056	+0.053	+0.050	
OVER 18 TØ 24	+0.099	+0.080	+0.068	+0.060	+0.056	+0.053	+0.106	+0.087	+0.075	+0.067	+0.063	+0.060	
OVER 24 TØ 30	+0.107	+0.088	+0.076	+0.068	+0.064	+0.061	+0.116	+0.097	+0.085	+0.077	+0.073	+0.070	
OVER 30 TØ 40	+0.130	+0.107	+0.093	+0.084	+0.079	+0.075	+0.142	+0.119	+0.105	+0.096	+0.091	+0.087	
OVER 40 TØ 50	+0.143	+0.120	+0.106	+0.097	+0.092	+0.088	+0.159	+0.136	+0.122	+0.113	+0.108	+0.104	
OVER 50 TØ 65	+0.176	+0.148	+0.132	+0.121	+0.115	+0.110	+0.196	+0.168	+0.152	+0.141	+0.135	+0.130	
OVER 65 TØ 80	+0.194	+0.166	+0.150	+0.139	+0.133	+0.128	+0.220	+0.192	+0.176	+0.165	+0.159	+0.154	
OVER 80 TØ 100	+0.233	+0.200	+0.181	+0.168	+0.161	+0.156	+0.265	+0.232	+0.213	+0.200	+0.193	+0.188	
OVER 100 TØ 120	+0.259	+0.226	+0.207	+0.194	+0.187	+0.182	+0.297	+0.264	+0.245	+0.232	+0.225	+0.220	
OVER 120 TØ 140	+0.302	+0.265	+0.242	+0.227	+0.220	+0.214	+0.348	+0.311	+0.288	+0.273	+0.266	+0.260	
OVER 140 TØ 160	+0.328	+0.291	+0.268	+0.253	+0.246	+0.240	+0.380	+0.343	+0.320	+0.305	+0.298	+0.292	
OVER 160 TØ 180	+0.352	+0.315	+0.292	+0.277	+0.270	+0.264	+0.410	+0.373	+0.350	+0.335	+0.328	+0.322	
OVER 180 TØ 200	+0.399	+0.356	+0.330	+0.313	+0.304	+0.298	+0.465	+0.422	+0.396	+0.379	+0.370	+0.364	
OVER 200 TØ 225	+0.425	+0.382	+0.356	+0.339	+0.330	+0.324	+0.500	+0.457	+0.431	+0.414	+0.405	+0.399	
OVER 225 TØ 250	+0.455	+0.412	+0.386	+0.369	+0.360	+0.354	+0.540	+0.497	+0.471	+0.454	+0.445	+0.439	
OVER 250 TØ 280	+0.515	+0.466	+0.437	+0.417	+0.408	+0.401	+0.605	+0.556	+0.527	+0.507	+0.498	+0.491	
OVER 280 TØ 315	+0.555	+0.506	+0.477	+0.457	+0.448	+0.441	+0.655	+0.606	+0.577	+0.557	+0.548	+0.541	
OVER 315 TØ 355	+0.615	+0.564	+0.532	+0.511	+0.500	+0.493	+0.730	+0.679	+0.647	+0.626	+0.615	+0.608	
OVER 355 TØ 400	+0.670	+0.619	+0.587	+0.566	+0.555	+0.548	+0.800	+0.749	+0.717	+0.696	+0.685	+0.678	
OVER 400 TØ 450	+0.750	+0.692	+0.658	+0.635	+0.622	+0.615	+0.895	+0.837	+0.803	+0.780	+0.767	+0.760	
OVER 450 TØ 500	+0.815	+0.757	+0.723	+0.700	+0.687	+0.680	+0.975	+0.917	+0.883	+0.860	+0.847	+0.840	

Table A24 Tolerance Zones for External (Shaft) Dimensions (y9 through y4 and z9 through z4)

Dimensions in mm

BASIC SIZE	y9	y8	y7	y6	y5	y4	z9	z8	z7	z6	z5	z4						
OVER 0 TD 3	NUMERICAL VALUES FOR TOLERANCE ZONES IN THIS AREA NOT DEFINED.						+0.051	+0.040	+0.036	+0.032	+0.030	+0.029	+0.029					
							+0.026	+0.026	+0.026	+0.026	+0.026	+0.026	+0.026	+0.026	+0.026	+0.026	+0.026	+0.026
OVER 3 TD 6							+0.065	+0.053	+0.047	+0.043	+0.040	+0.039	+0.035	+0.035	+0.035	+0.035	+0.035	+0.035
							+0.035	+0.035	+0.035	+0.035	+0.035	+0.035	+0.035	+0.035	+0.035	+0.035	+0.035	+0.035
OVER 6 TD 10							+0.078	+0.064	+0.057	+0.051	+0.048	+0.046	+0.042	+0.042	+0.042	+0.042	+0.042	+0.042
							+0.042	+0.042	+0.042	+0.042	+0.042	+0.042	+0.042	+0.042	+0.042	+0.042	+0.042	+0.042
OVER 10 TD 14							+0.093	+0.077	+0.068	+0.061	+0.058	+0.055	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050
							+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050	+0.050
OVER 14 TD 18							+0.103	+0.087	+0.078	+0.071	+0.068	+0.065	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060
							+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060	+0.060
OVER 18 TD 24	+0.115	+0.096	+0.084	+0.076	+0.072	+0.069	+0.125	+0.106	+0.094	+0.086	+0.082	+0.079						
	+0.063	+0.063	+0.063	+0.063	+0.063	+0.063	+0.073	+0.073	+0.073	+0.073	+0.073	+0.073						
OVER 24 TD 30	+0.127	+0.108	+0.096	+0.088	+0.084	+0.081	+0.140	+0.121	+0.109	+0.101	+0.097	+0.094						
	+0.075	+0.075	+0.075	+0.075	+0.075	+0.075	+0.088	+0.088	+0.088	+0.088	+0.088	+0.088						
OVER 30 TD 40	+0.156	+0.133	+0.119	+0.110	+0.105	+0.101	+0.174	+0.151	+0.137	+0.128	+0.123	+0.119						
	+0.094	+0.094	+0.094	+0.094	+0.094	+0.094	+0.112	+0.112	+0.112	+0.112	+0.112	+0.112						
OVER 40 TD 50	+0.176	+0.153	+0.139	+0.130	+0.125	+0.121	+0.198	+0.175	+0.161	+0.152	+0.147	+0.143						
	+0.114	+0.114	+0.114	+0.114	+0.114	+0.114	+0.136	+0.136	+0.136	+0.136	+0.136	+0.136						
OVER 50 TD 65	+0.218	+0.190	+0.174	+0.163	+0.157	+0.152	+0.246	+0.218	+0.202	+0.191	+0.185	+0.180						
	+0.144	+0.144	+0.144	+0.144	+0.144	+0.144	+0.172	+0.172	+0.172	+0.172	+0.172	+0.172						
OVER 65 TD 80	+0.248	+0.220	+0.204	+0.193	+0.187	+0.182	+0.284	+0.256	+0.240	+0.229	+0.223	+0.218						
	+0.174	+0.174	+0.174	+0.174	+0.174	+0.174	+0.210	+0.210	+0.210	+0.210	+0.210	+0.210						
OVER 80 TD 100	+0.301	+0.268	+0.249	+0.236	+0.229	+0.224	+0.345	+0.312	+0.293	+0.280	+0.273	+0.268						
	+0.214	+0.214	+0.214	+0.214	+0.214	+0.214	+0.258	+0.258	+0.258	+0.258	+0.258	+0.258						
OVER 100 TD 120	+0.341	+0.308	+0.289	+0.276	+0.269	+0.264	+0.397	+0.364	+0.345	+0.332	+0.325	+0.320						
	+0.254	+0.254	+0.254	+0.254	+0.254	+0.254	+0.310	+0.310	+0.310	+0.310	+0.310	+0.310						
OVER 120 TD 140	+0.400	+0.363	+0.340	+0.325	+0.318	+0.312	+0.465	+0.428	+0.405	+0.390	+0.383	+0.377						
	+0.300	+0.300	+0.300	+0.300	+0.300	+0.300	+0.365	+0.365	+0.365	+0.365	+0.365	+0.365						
OVER 140 TD 160	+0.440	+0.403	+0.380	+0.365	+0.358	+0.352	+0.515	+0.478	+0.455	+0.440	+0.433	+0.427						
	+0.340	+0.340	+0.340	+0.340	+0.340	+0.340	+0.415	+0.415	+0.415	+0.415	+0.415	+0.415						
OVER 160 TD 180	+0.480	+0.443	+0.420	+0.405	+0.398	+0.392	+0.565	+0.528	+0.505	+0.490	+0.483	+0.477						
	+0.380	+0.380	+0.380	+0.380	+0.380	+0.380	+0.465	+0.465	+0.465	+0.465	+0.465	+0.465						
OVER 180 TD 200	+0.540	+0.497	+0.471	+0.454	+0.445	+0.439	+0.635	+0.592	+0.566	+0.549	+0.540	+0.534						
	+0.425	+0.425	+0.425	+0.425	+0.425	+0.425	+0.520	+0.520	+0.520	+0.520	+0.520	+0.520						
OVER 200 TD 225	+0.585	+0.542	+0.516	+0.499	+0.490	+0.484	+0.690	+0.647	+0.621	+0.604	+0.595	+0.589						
	+0.470	+0.470	+0.470	+0.470	+0.470	+0.470	+0.575	+0.575	+0.575	+0.575	+0.575	+0.575						
OVER 225 TD 250	+0.635	+0.592	+0.566	+0.549	+0.540	+0.534	+0.755	+0.712	+0.686	+0.669	+0.660	+0.654						
	+0.520	+0.520	+0.520	+0.520	+0.520	+0.520	+0.640	+0.640	+0.640	+0.640	+0.640	+0.640						
OVER 250 TD 280	+0.710	+0.661	+0.632	+0.612	+0.603	+0.596	+0.840	+0.791	+0.762	+0.742	+0.733	+0.726						
	+0.580	+0.580	+0.580	+0.580	+0.580	+0.580	+0.710	+0.710	+0.710	+0.710	+0.710	+0.710						
OVER 280 TD 315	+0.780	+0.731	+0.702	+0.682	+0.673	+0.666	+0.920	+0.871	+0.842	+0.822	+0.813	+0.806						
	+0.650	+0.650	+0.650	+0.650	+0.650	+0.650	+0.790	+0.790	+0.790	+0.790	+0.790	+0.790						
OVER 315 TD 355	+0.870	+0.819	+0.787	+0.766	+0.755	+0.748	+1.040	+0.989	+0.957	+0.936	+0.925	+0.918						
	+0.730	+0.730	+0.730	+0.730	+0.730	+0.730	+0.900	+0.900	+0.900	+0.900	+0.900	+0.900						
OVER 355 TD 400	+0.960	+0.909	+0.877	+0.856	+0.845	+0.838	+1.140	+1.089	+1.057	+1.036	+1.025	+1.018						
	+0.820	+0.820	+0.820	+0.820	+0.820	+0.820	+1.000	+1.000	+1.000	+1.000	+1.000	+1.000						
OVER 400 TD 450	+1.075	+1.017	+0.983	+0.960	+0.947	+0.940	+1.255	+1.197	+1.163	+1.140	+1.127	+1.120						
	+0.920	+0.920	+0.920	+0.920	+0.920	+0.920	+1.100	+1.100	+1.100	+1.100	+1.100	+1.100						
OVER 450 TD 500	+1.155	+1.097	+1.063	+1.040	+1.027	+1.020	+1.405	+1.347	+1.313	+1.290	+1.277	+1.270						
	+1.000	+1.000	+1.000	+1.000	+1.000	+1.000	+1.250	+1.250	+1.250	+1.250	+1.250	+1.250						

APPENDIX B

TABLE OF INTERNATIONAL TOLERANCE GRADES, FUNDAMENTAL DEVIATIONS AND THEIR DERIVATIONS

CONTENTS

	Page
B1. Introduction	42
B2. Interpretation of ISO Symbols Using Table Values	50
B2.1 Hole Letter Codes A thru JS	50
B2.2 Hole Letter Codes J thru ZC	51
B2.3 Shaft Letter Codes a thru js	53
B2.4 Shaft Letter Codes j thru zc	54
B3. Derivation of Table Values	56
B3.1 International Tolerance Grades	56
B3.2 Derivation of Fundamental Derivations for Shafts	57
B3.3 Derivation of Fundamental Deviations for Holes	59
B4. Conversion of Fits	60

TABLE

B1 International Tolerance Grades	43
B2 Fundamental Deviations for Holes	44, 45, 46
B3 Fundamental Deviations for Shafts	47, 48, 49
B4 Formulas for IT Grades 6 thru 16	56
B5 Formulas for IT Grades 01 thru 5	56
B6 Coefficients for Calculation of Fundamental Deviations for Shafts	64

APPENDIX B

B1. INTRODUCTION

This appendix provides the data needed to calculate limit dimensions for nonpreferred tolerance designations (that is those not shown in Figures 2 and 3 of this standard) and for basic sizes larger than 500 millimeters. This appendix contains:

- a. *International tolerance grades from IT01 thru IT16* for basic sizes up to and including 3150 millimeters (Table B1). Tolerance zones with IT grades larger than IT16 are sometimes used. A footnote in Table B1 gives a simple formula for calculating IT17, IT18, etc.
- b. *Fundamental deviations* for basic sizes up to 3150 millimeters:

Holes	Table B2
Shafts	Table B3
- c. *Interpretation of ISO symbols* using the table values for basic sizes up to 3150 millimeters (paragraph B2).
- d. *Formulas for the derivation of table values*. These formulas are for reference only. Rounding variations introduced in calculations may result in values which are inconsistent with the published national and international standards (paragraph B3).
- e. *Guidelines for converting fits* (paragraph B4).

TABLE B1 INTERNATIONAL TOLERANCE GRADES

Dimensions are in mm.

Basic sizes		Tolerance grades ³																	
Over	Up to and including	IT01	IT0	IT1	IT2	IT3	IT4	IT5	IT6	IT7	IT8	IT9	IT10	IT11	IT12	IT13	IT14	IT15	IT16
0	3	0.0003	0.0005	0.0008	0.0012	0.002	0.003	0.004	0.006	0.010	0.014	0.025	0.040	0.060	0.100	0.140	0.250	0.400	0.600
3	6	0.0004	0.0006	0.001	0.0015	0.0025	0.004	0.005	0.008	0.012	0.018	0.030	0.048	0.075	0.120	0.180	0.300	0.480	0.750
6	10	0.0004	0.0006	0.001	0.0015	0.0025	0.004	0.006	0.009	0.015	0.022	0.036	0.058	0.090	0.150	0.220	0.360	0.580	0.900
10	18	0.0005	0.0008	0.0012	0.002	0.003	0.005	0.008	0.011	0.018	0.027	0.043	0.070	0.110	0.180	0.270	0.430	0.700	1.100
18	30	0.0006	0.001	0.0015	0.0025	0.004	0.006	0.009	0.013	0.021	0.033	0.052	0.084	0.130	0.210	0.330	0.520	0.840	1.300
30	50	0.0006	0.001	0.0015	0.0025	0.004	0.007	0.011	0.016	0.025	0.039	0.062	0.100	0.160	0.250	0.390	0.620	1.000	1.600
50	80	0.0008	0.0012	0.002	0.003	0.005	0.008	0.013	0.019	0.030	0.046	0.074	0.120	0.190	0.300	0.460	0.740	1.200	1.900
80	120	0.001	0.0015	0.0025	0.004	0.006	0.010	0.015	0.022	0.035	0.054	0.087	0.140	0.220	0.350	0.540	0.870	1.400	2.200
120	180	0.0012	0.002	0.0035	0.005	0.008	0.012	0.018	0.025	0.040	0.063	0.100	0.160	0.250	0.400	0.630	1.000	1.600	2.500
180	250	0.002	0.003	0.0045	0.007	0.010	0.014	0.020	0.029	0.046	0.072	0.115	0.185	0.290	0.460	0.720	1.150	1.850	2.900
250	315	0.0025	0.004	0.006	0.008	0.012	0.016	0.023	0.032	0.052	0.081	0.130	0.210	0.320	0.520	0.810	1.300	2.100	3.200
315	400	0.003	0.005	0.007	0.009	0.013	0.018	0.025	0.036	0.057	0.089	0.140	0.230	0.360	0.570	0.890	1.400	2.300	3.600
400	500	0.004	0.006	0.008	0.010	0.015	0.020	0.027	0.040	0.063	0.097	0.155	0.250	0.400	0.630	0.970	1.550	2.500	4.000
500	630	0.0045	0.006	0.009	0.011	0.016	0.022	0.030	0.044	0.070	0.110	0.175	0.280	0.440	0.700	1.100	1.750	2.800	4.400
630	800	0.005	0.007	0.010	0.013	0.018	0.025	0.035	0.050	0.080	0.125	0.200	0.320	0.500	0.800	1.250	2.000	3.200	5.000
800	1000	0.0055	0.008	0.011	0.015	0.021	0.029	0.040	0.056	0.090	0.140	0.230	0.360	0.560	0.900	1.400	2.300	3.600	5.600
1000	1250	0.0065	0.009	0.013	0.018	0.024	0.034	0.046	0.066	0.105	0.165	0.260	0.420	0.660	1.050	1.650	2.600	4.200	6.600
1250	1600	0.008	0.011	0.015	0.021	0.029	0.040	0.054	0.078	0.125	0.195	0.310	0.500	0.780	1.250	1.950	3.100	5.000	7.800
1600	2000	0.009	0.013	0.018	0.025	0.035	0.048	0.065	0.092	0.150	0.230	0.370	0.600	0.920	1.500	2.300	3.700	6.000	9.200
2000	2500	0.011	0.015	0.022	0.030	0.041	0.057	0.077	0.110	0.175	0.280	0.440	0.700	1.100	1.750	2.800	4.400	7.000	11.000
2500	3150	0.013	0.018	0.026	0.036	0.050	0.069	0.093	0.135	0.210	0.330	0.540	0.860	1.350	2.100	3.300	5.400	8.600	13.500

³ IT Values for tolerance grades larger than IT16 can be calculated by using the following formulas:
 IT 17 = IT12 x 10; IT18 = IT13 x 10; etc.

TABLE B2 FUNDAMENTAL DEVIATIONS FOR HOLES

Dimensions are in mm.

Fundamental Deviation		Lower Deviation													
Letter		A	B	C	CD	D	E	EF	F	FG	G	H	JS ⁴		
IT Grade		01 to 16													
Basic Sizes															
Over	Up to and Including														
0	3	+ 0.270	+ 0.140	+ 0.060	+ 0.034	+ 0.020	+ 0.014	+ 0.010	+ 0.006	+ 0.004	+ 0.002	0			
3	6	+ 0.270	+ 0.140	+ 0.070	+ 0.046	+ 0.030	+ 0.020	+ 0.014	+ 0.010	+ 0.006	+ 0.004	0			
6	10	+ 0.280	+ 0.150	+ 0.080	+ 0.056	+ 0.040	+ 0.025	+ 0.018	+ 0.013	+ 0.008	+ 0.005	0			
10	14	+ 0.290	+ 0.150	+ 0.095	-	+ 0.050	+ 0.032	-	+ 0.016	-	+ 0.006	0	- IT/2		
14	18														
18	24	+ 0.300	+ 0.160	+ 0.110	-	+ 0.065	+ 0.040	-	+ 0.020	-	+ 0.007	0		- IT/2	
24	30														
30	40	+ 0.310	+ 0.170	+ 0.120	-	+ 0.080	+ 0.050	-	+ 0.025	-	+ 0.009	0			- IT/2
40	50	+ 0.320	+ 0.180	+ 0.130	-	+ 0.100	+ 0.060	-	+ 0.030	-	+ 0.010	0			
50	65	+ 0.340	+ 0.190	+ 0.140	-	+ 0.120	+ 0.072	-	+ 0.036	-	+ 0.012	0			
65	80	+ 0.360	+ 0.200	+ 0.150	-	+ 0.145	+ 0.085	-	+ 0.043	-	+ 0.014	0			
80	100	+ 0.380	+ 0.220	+ 0.170	-	+ 0.170	+ 0.100	-	+ 0.050	-	+ 0.015	0			
100	120	+ 0.410	+ 0.240	+ 0.180	-	+ 0.190	+ 0.110	-	+ 0.056	-	+ 0.017	0			
120	140	+ 0.460	+ 0.260	+ 0.200	-	+ 0.210	+ 0.125	-	+ 0.062	-	+ 0.018	0			
140	160	+ 0.520	+ 0.280	+ 0.210	-	+ 0.230	+ 0.135	-	+ 0.068	-	+ 0.020	0			
160	180	+ 0.580	+ 0.310	+ 0.230	-	+ 0.250	+ 0.145	-	+ 0.076	-	+ 0.022	0			
180	200	+ 0.660	+ 0.340	+ 0.240	-	+ 0.260	+ 0.155	-	+ 0.082	-	+ 0.024	0			
200	225	+ 0.740	+ 0.380	+ 0.260	-	+ 0.280	+ 0.165	-	+ 0.088	-	+ 0.026	0			
225	250	+ 0.820	+ 0.420	+ 0.280	-	+ 0.290	+ 0.175	-	+ 0.094	-	+ 0.028	0			
250	280	+ 0.920	+ 0.480	+ 0.300	-	+ 0.300	+ 0.185	-	+ 0.100	-	+ 0.030	0			
280	315	+ 1.050	+ 0.540	+ 0.330	-	+ 0.310	+ 0.195	-	+ 0.106	-	+ 0.032	0			
315	355	+ 1.200	+ 0.600	+ 0.360	-	+ 0.320	+ 0.205	-	+ 0.112	-	+ 0.034	0			
355	400	+ 1.350	+ 0.680	+ 0.400	-	+ 0.330	+ 0.215	-	+ 0.118	-	+ 0.036	0			
400	450	+ 1.500	+ 0.760	+ 0.440	-	+ 0.340	+ 0.225	-	+ 0.124	-	+ 0.038	0			
450	500	+ 1.650	+ 0.840	+ 0.480	-	+ 0.350	+ 0.235	-	+ 0.130	-	+ 0.040	0			
IT Grade		6 to 16													
500	630	-	-	-	-	+ 0.260	+ 0.145	-	+ 0.076	-	+ 0.022	0	- IT/2		
630	800	-	-	-	-	+ 0.290	+ 0.160	-	+ 0.080	-	+ 0.024	0			
800	1000	-	-	-	-	+ 0.320	+ 0.170	-	+ 0.086	-	+ 0.026	0			
1000	1250	-	-	-	-	+ 0.350	+ 0.195	-	+ 0.098	-	+ 0.028	0			
1250	1600	-	-	-	-	+ 0.390	+ 0.220	-	+ 0.110	-	+ 0.030	0			
1600	2000	-	-	-	-	+ 0.430	+ 0.240	-	+ 0.120	-	+ 0.032	0			
2000	2500	-	-	-	-	+ 0.480	+ 0.260	-	+ 0.130	-	+ 0.034	0			
2500	3150	-	-	-	-	+ 0.520	+ 0.290	-	+ 0.145	-	+ 0.038	0			

⁴ The JS deviations in the grades 7 to 11 should be rounded off to 1/2 (IT-0.001) when the IT value is odd.

TABLE B2 FUNDAMENTAL DEVIATIONS FOR HOLES (Continued)

Dimensions are in mm.

Fundamental Deviation		Upper Deviation														
Letter		J			K		M		N			P to ZC	P	R	S	T
T Grade		6	7	8	< 8	> 8	< 8'	> 8	< 8	> 8	< 7	Above 7				
Basic Sizes																
Over	Up to and including															
0	3	+0.002	+0.004	+0.006	0	0	-0.002	-0.002	-0.004	-0.004		-0.006	-0.010	-0.014	-	
3	6	+0.005	+0.006	+0.010	-0.001 + Δ	-	-0.004 + Δ	-0.004	-0.008 + Δ	0		-0.012	-0.015	-0.019	-	
6	10	+0.005	+0.008	+0.012	-0.001 + Δ	-	-0.006 + Δ	-0.006	-0.010 + Δ	0		-0.015	-0.019	-0.023	-	
10	14	+0.006	+0.010	+0.015	-0.001 + Δ	-	-0.007 + Δ	-0.007	-0.012 + Δ	0		-0.018	-0.23	-0.028	-	
14	18															
18	24	+0.008	+0.012	+0.020	-0.002 + Δ	-	-0.008 + Δ	-0.008	-0.015 + Δ	0		-0.022	-0.028	-0.035	-	
24	30														-0.041	
30	40	+0.010	+0.014	+0.024	-0.002 + Δ	-	-0.009 + Δ	-0.009	-0.017 + Δ	0		-0.026	-0.034	-0.043	-0.048	
40	50														-0.054	
50	65	+0.013	+0.018	+0.028	+0.002 + Δ	-	-0.011 + Δ	-0.011	-0.020 + Δ	0		-0.032	-0.041	-0.053	-0.066	
65	80														-0.075	
80	100	+0.016	+0.022	+0.034	-0.003 + Δ	-	-0.013 + Δ	-0.013	-0.023 + Δ	0		-0.037	-0.051	-0.071	-0.091	
100	120														-0.104	
120	140	+0.018	+0.026	+0.041	-0.003 + Δ	-	-0.015 + Δ	-0.015	-0.027 + Δ	0		-0.043	-0.063	-0.092	-0.122	
140	160												-0.134			
160	180	+0.022	+0.030	+0.047	-0.004 + Δ	-	-0.017 + Δ	-0.017	-0.031 + Δ	0		-0.050	-0.068	-0.108	-0.146	
180	200												-0.166			
200	225	+0.025	+0.036	+0.055	-0.004 + Δ	-	-0.020 + Δ	-0.020	-0.034 + Δ	0		-0.056	-0.077	-0.122	-0.166	
225	250												-0.180			
250	280	+0.029	+0.039	+0.060	-0.004 + Δ	-	-0.021 + Δ	-0.021	-0.037 + Δ	0		-0.062	-0.080	-0.130	-0.180	
280	315												-0.196			
315	355	+0.033	+0.043	+0.066	-0.005 + Δ	-	-0.023 + Δ	-0.023	-0.040 + Δ	0		-0.068	-0.094	-0.158	-0.218	
355	400												-0.240			
400	450	+0.033	+0.043	+0.066	-0.005 + Δ	-	-0.023 + Δ	-0.023	-0.040 + Δ	0		-0.068	-0.098	-0.170	-0.240	
450	500												-0.268			
T Grade		6 to 16														
500	560				0		-0.026		-0.044							
560	630				0		-0.030		-0.050							
630	710				0		-0.034		-0.056							
710	800				0		-0.040		-0.066							
800	900				0		-0.048		-0.078							
900	1000				0		-0.058		-0.092							
1000	1120				0		-0.068		-0.110							
1120	1250				0		-0.076		-0.135							
1250	1400				0		-0.080		-0.110							
1400	1600				0		-0.088		-0.110							
1600	1800				0		-0.092		-0.110							
1800	2000				0		-0.098		-0.110							
2000	2240				0		-0.102		-0.110							
2240	2500				0		-0.108		-0.110							
2500	2800				0		-0.114		-0.110							
2800	3150				0		-0.120		-0.110							

Same deviation as for grade above 7 increased by Δ

TABLE B2 FUNDAMENTAL DEVIATIONS FOR HOLES (Continued)

Dimensions are in mm

Upper Deviation								Values for Δ^4						Fundamental Deviation	
U	V	X	Y	Z	ZA	ZB	ZC	IT Grades:						Letter	IT Grade
Above 7								3	4	5	6	7	8	Over	Up to and including
-0.018	-	-0.020	-	-0.026	-0.032	-0.040	-0.060	0	0	0	0	0	0	0	3
-0.023	-	-0.028	-	-0.035	-0.042	-0.050	-0.080	0.001	0.0015	0.001	0.003	0.004	0.006	3	6
-0.028	-	-0.034	-	-0.042	-0.052	-0.067	-0.097	0.001	0.0015	0.002	0.003	0.006	0.007	6	10
-0.033	-	-0.040	-	-0.050	-0.064	-0.090	-0.130	0.001	0.002	0.003	0.003	0.007	0.009	10	14
	-0.039	-0.045	-	-0.060	-0.077	-0.108	-0.150							14	18
-0.041	-0.047	-0.064	-0.063	-0.073	-0.098	-0.136	-0.188	0.0015	0.002	0.003	0.004	0.008	0.012	18	24
-0.048	-0.055	-0.064	-0.075	-0.088	-0.118	-0.160	-0.218							24	30
-0.060	-0.068	-0.080	-0.094	-0.112	-0.148	-0.200	-0.274	0.0015	0.003	0.004	0.005	0.009	0.014	30	40
-0.070	-0.081	-0.097	-0.114	-0.136	-0.180	-0.242	-0.325							40	50
-0.087	-0.102	-0.122	-0.144	-0.172	-0.226	-0.300	-0.405	0.002	0.003	0.005	0.006	0.011	0.016	50	65
-0.102	-0.120	-0.146	-0.174	-0.210	-0.274	-0.360	-0.480							65	80
-0.124	-0.146	-0.178	-0.214	-0.258	-0.335	-0.445	-0.585	0.002	0.004	0.005	0.007	0.013	0.019	80	100
-0.144	-0.172	-0.210	-0.254	-0.310	-0.400	-0.525	-0.690							100	120
-0.170	-0.202	-0.248	-0.300	-0.365	-0.470	-0.620	-0.800	0.003	0.004	0.006	0.007	0.015	0.023	120	140
-0.190	-0.228	-0.280	-0.340	-0.415	-0.535	-0.700	-0.900							140	160
-0.210	-0.252	-0.310	-0.380	-0.465	-0.600	-0.780	-1.000	0.003	0.004	0.006	0.009	0.017	0.026	160	180
-0.236	-0.284	-0.350	-0.425	-0.520	-0.670	-0.880	-1.150							180	200
-0.258	-0.310	-0.385	-0.470	-0.575	-0.740	-0.960	-1.250	0.003	0.004	0.006	0.009	0.017	0.026	200	225
-0.284	-0.340	-0.425	-0.520	-0.640	-0.820	-1.050	-1.350							225	250
-0.315	-0.385	-0.475	-0.580	-0.710	-0.920	-1.200	-1.550	0.004	0.004	0.007	0.009	0.020	0.029	250	280
-0.350	-0.425	-0.525	-0.650	-0.790	-1.000	-1.300	-1.700							280	315
-0.390	-0.475	-0.590	-0.730	-0.900	-1.150	-1.500	-1.900	0.004	0.005	0.007	0.011	0.021	0.032	315	355
-0.435	-0.530	-0.660	-0.820	-1.000	-1.300	-1.650	-2.100							355	400
-0.490	-0.595	-0.740	-0.920	-1.100	-1.450	-1.850	-2.400	0.005	0.005	0.007	0.013	0.023	0.034	400	450
-0.540	-0.660	-0.820	-1.000	-1.250	-1.600	-2.100	-2.600							450	500
6 to 16														IT Grade	
-0.600												500	560		
-0.660												560	630		
-0.740												630	710		
-0.840												710	800		
-0.940												800	900		
-1.050												900	1000		
-1.150												1000	1120		
-1.300												1120	1250		
-1.450												1250	1400		
-1.600												1400	1600		
-1.850												1600	1800		
-2.000												1800	2000		
-2.300												2000	2240		
-2.500												2240	2500		
-2.900												2500	2800		
-3.200												2800	3150		

⁵ Special case: for M6, upper deviation = -0.009 from 250 to 315 (instead of -0.011).

⁶ In determining K, M, N up to IT grade 8 and P to ZC up to IT grade 7, add the Δ value appropriate to the IT grade as indicated, for example for P7 from 18 to 30, $\Delta = 0.008$ \therefore upper deviation = -0.014.

TABLE B3 FUNDAMENTAL DEVIATIONS FOR SHAFTS

Dimensions are in mm.

Fundamental Deviation		Upper Deviation											
Letter		a	b	c	cd	d	e	ef	f	fg	g	h	js ²
IT Grade		01 to 16											
Basic Sizes													
Over	Up to and including												
0	3	-0.270	-0.140	-0.060	-0.034	-0.020	-0.014	-0.010	-0.006	-0.004	-0.002	0	
3	6	-0.270	-0.140	-0.070	-0.046	-0.030	-0.020	-0.014	-0.010	-0.006	-0.004	0	
6	10	-0.280	-0.150	-0.080	-0.056	-0.040	-0.025	-0.018	-0.013	-0.008	-0.005	0	
10	14												
14	18	-0.290	-0.150	-0.095	-	-0.050	-0.032	-	-0.016	-	-0.006	0	
18	24												
24	30	-0.300	-0.160	-0.110	-	-0.065	-0.040	-	-0.020	-	-0.007	0	+ IT/2
30	40	-0.310	-0.170	-0.120	-	-0.080	-0.050	-	-0.025	-	-0.009	0	
40	50	-0.320	-0.180	-0.130	-	-0.100	-0.060	-	-0.030	-	-0.010	0	
50	65	-0.340	-0.190	-0.140	-	-0.120	-0.072	-	-0.036	-	-0.012	0	
65	80	-0.360	-0.200	-0.150	-	-0.145	-0.085	-	-0.043	-	-0.014	0	
80	100	-0.380	-0.220	-0.170	-	-0.170	-0.100	-	-0.050	-	-0.015	0	
100	120	0.410	-0.240	-0.180	-	-0.190	-0.110	-	-0.056	-	-0.017	0	
120	140	-0.460	-0.260	-0.200	-	-0.210	-0.125	-	-0.062	-	-0.018	0	
140	160	0.520	-0.280	-0.210	-	-0.230	-0.135	-	-0.068	-	-0.020	0	
160	180	-0.580	-0.310	-0.230	-	-0.250	-0.145	-	-0.074	-	-0.022	0	
180	200	-0.660	-0.340	-0.240	-	-0.270	-0.155	-	-0.080	-	-0.024	0	
200	225	-0.740	-0.380	-0.260	-	-0.290	-0.165	-	-0.086	-	-0.026	0	
225	250	-0.820	-0.420	-0.280	-	-0.310	-0.175	-	-0.092	-	-0.028	0	
250	280	-0.920	-0.480	-0.300	-	-0.330	-0.185	-	-0.098	-	-0.030	0	
280	315	-1.050	-0.540	-0.330	-	-0.350	-0.195	-	-0.104	-	-0.032	0	
315	355	-1.200	-0.600	-0.360	-	-0.370	-0.205	-	-0.110	-	-0.034	0	
355	400	-1.350	-0.680	-0.400	-	-0.390	-0.215	-	-0.116	-	-0.036	0	
400	450	-1.500	-0.760	-0.440	-	-0.410	-0.225	-	-0.122	-	-0.038	0	
450	500	-1.650	-0.840	-0.480	-	-0.430	-0.235	-	-0.128	-	-0.040	0	
IT Grade		6 to 16											
500	630	-	-	-	-	-0.260	-0.145	-	-0.076	-	-0.022	0	
630	800	-	-	-	-	-0.290	-0.160	-	-0.080	-	-0.024	0	
800	1000	-	-	-	-	-0.320	-0.170	-	-0.086	-	-0.026	0	
1000	1250	-	-	-	-	-0.350	-0.195	-	-0.098	-	-0.028	0	+ IT/2
1250	1600	-	-	-	-	-0.390	-0.220	-	-0.110	-	-0.030	0	
1600	2000	-	-	-	-	-0.430	-0.240	-	-0.120	-	-0.032	0	
2000	2500	-	-	-	-	-0.480	-0.260	-	-0.130	-	-0.034	0	
2500	3150	-	-	-	-	-0.520	-0.290	-	-0.145	-	-0.038	0	

² The js deviations in the grades 7 to 11 should be rounded off to 1/2 (IT-0.001) when the IT value is odd.

TABLE B3 FUNDAMENTAL DEVIATIONS FOR SHAFTS
(Continued)

Dimensions are in mm.

Fundamental Deviation		Lower Deviation									
Letter		j			k		m	n	p	r	s
IT Grade		5-6	7	8	4-7	≤ 3 > 7	01 to 16				
Basic Size											
Over	Up to and including										
0	3	-0.002	-0.004	-0.006	0	0	+0.002	+0.004	+0.006	+0.010	+0.014
3	6	-0.002	-0.004	-	+0.001	0	+0.004	+0.008	+0.012	+0.015	+0.019
6	10	-0.002	-0.005	-	+0.001	0	+0.006	+0.010	+0.015	+0.019	+0.023
10	14	-0.003	-0.006	-	+0.001	0	+0.007	+0.012	+0.018	+0.023	+0.028
14	18	-0.004	-0.008	-	+0.002	0	+0.008	+0.015	+0.022	+0.028	+0.035
18	24	-0.004	-0.008	-	+0.002	0	+0.008	+0.015	+0.022	+0.028	+0.035
24	30	-0.005	-0.010	-	+0.002	0	+0.009	+0.017	+0.026	+0.034	+0.043
30	40	-0.005	-0.010	-	+0.002	0	+0.009	+0.017	+0.026	+0.034	+0.043
40	50	-0.007	-0.012	-	+0.002	0	+0.011	+0.020	+0.032	+0.041	+0.053
50	65	-0.007	-0.012	-	+0.002	0	+0.011	+0.020	+0.032	+0.043	+0.059
65	80	-0.009	-0.015	-	+0.003	0	+0.013	+0.023	+0.037	+0.051	+0.071
80	100	-0.009	-0.015	-	+0.003	0	+0.013	+0.023	+0.037	+0.054	+0.079
100	120	-0.011	-0.018	-	+0.003	0	+0.015	+0.027	+0.043	+0.063	+0.092
120	140	-0.011	-0.018	-	+0.003	0	+0.015	+0.027	+0.043	+0.065	+0.100
140	160	-0.011	-0.018	-	+0.003	0	+0.015	+0.027	+0.043	+0.068	+0.108
160	180	-0.013	-0.021	-	+0.004	0	+0.017	+0.031	+0.050	+0.077	+0.122
180	200	-0.013	-0.021	-	+0.004	0	+0.017	+0.031	+0.050	+0.080	+0.130
200	225	-0.013	-0.021	-	+0.004	0	+0.017	+0.031	+0.050	+0.084	+0.140
225	250	-0.016	-0.026	-	+0.004	0	+0.020	+0.034	+0.056	+0.094	+0.158
250	280	-0.016	-0.026	-	+0.004	0	+0.020	+0.034	+0.056	+0.098	+0.170
280	315	-0.018	-0.028	-	+0.004	0	+0.021	+0.037	+0.062	+0.108	+0.190
315	355	-0.018	-0.028	-	+0.004	0	+0.021	+0.037	+0.062	+0.114	+0.208
355	400	-0.020	-0.032	-	+0.005	0	+0.023	+0.040	+0.068	+0.126	+0.232
400	450	-0.020	-0.032	-	+0.005	0	+0.023	+0.040	+0.068	+0.132	+0.252
450	500	-0.020	-0.032	-	+0.005	0	+0.023	+0.040	+0.068	+0.132	+0.252
IT Grade		6 to 16									
500	560				0	+0.026	+0.044	+0.078	+0.150	+0.280	
560	630				0	+0.026	+0.044	+0.078	+0.155	+0.310	
630	710				0	+0.030	+0.050	+0.088	+0.175	+0.340	
710	800				0	+0.030	+0.050	+0.088	+0.185	+0.380	
800	900				0	+0.034	+0.056	+0.100	+0.210	+0.430	
900	1000				0	+0.034	+0.056	+0.100	+0.220	+0.470	
1000	1120				0	+0.040	+0.066	+0.120	+0.250	+0.520	
1120	1250				0	+0.040	+0.066	+0.120	+0.260	+0.580	
1250	1400				0	+0.048	+0.078	+0.140	+0.300	+0.640	
1400	1600				0	+0.048	+0.078	+0.140	+0.330	+0.720	
1600	1800				0	+0.058	+0.092	+0.170	+0.370	+0.820	
1800	2000				0	+0.058	+0.092	+0.170	+0.400	+0.920	
2000	2240				0	+0.068	+0.110	+0.195	+0.440	+1.000	
2240	2500				0	+0.068	+0.110	+0.195	+0.460	+1.100	
2500	2800				0	+0.076	+0.135	+0.240	+0.550	+1.250	
2800	3150				0	+0.076	+0.135	+0.240	+0.580	+1.400	

TABLE B3 FUNDAMENTAL DEVIATIONS FOR SHAFTS
(Continued)

Dimensions are in mm.

Lower Deviation									Fundamental Deviation	
t	u	v	x	y	z	za	zb	zc	Letter	
01 to 16									IT Grade	
									Basic Size	
									Over	Up to and including
-	+ 0.018	-	+ 0.020	-	+ 0.026	+ 0.032	+ 0.040	+ 0.060	0	3
-	+ 0.023	-	+ 0.028	-	+ 0.035	+ 0.042	+ 0.050	+ 0.080	3	6
-	+ 0.028	-	+ 0.034	-	+ 0.042	+ 0.052	+ 0.067	+ 0.097	6	10
-	+ 0.033	-	+ 0.040	-	+ 0.050	+ 0.064	+ 0.090	+ 0.130	10	14
		+ 0.039	+ 0.045	-	+ 0.060	+ 0.077	+ 0.108	+ 0.150	14	18
-	+ 0.041	+ 0.047	+ 0.054	+ 0.063	+ 0.073	+ 0.098	+ 0.136	+ 0.188	18	24
+ 0.041	+ 0.048	+ 0.055	+ 0.064	+ 0.075	+ 0.088	+ 0.118	+ 0.160	+ 0.218	24	30
+ 0.048	+ 0.060	+ 0.068	+ 0.080	+ 0.094	+ 0.112	+ 0.148	+ 0.200	+ 0.274	30	40
+ 0.054	+ 0.070	+ 0.081	+ 0.097	+ 0.114	+ 0.136	+ 0.180	+ 0.242	+ 0.325	40	50
+ 0.066	+ 0.087	+ 0.102	+ 0.122	+ 0.144	+ 0.172	+ 0.226	+ 0.300	+ 0.405	50	65
+ 0.075	+ 0.102	+ 0.120	+ 0.146	+ 0.174	+ 0.210	+ 0.274	+ 0.360	+ 0.480	65	80
+ 0.091	+ 0.124	+ 0.146	+ 0.178	+ 0.214	+ 0.258	+ 0.335	+ 0.445	+ 0.585	80	100
+ 0.104	+ 0.144	+ 0.172	+ 0.210	+ 0.254	+ 0.310	+ 0.400	+ 0.525	+ 0.690	100	120
+ 0.122	+ 0.170	+ 0.202	+ 0.248	+ 0.300	+ 0.365	+ 0.470	+ 0.620	+ 0.800	120	140
+ 0.134	+ 0.190	+ 0.228	+ 0.280	+ 0.340	+ 0.415	+ 0.535	+ 0.700	+ 0.900	140	160
+ 0.146	+ 0.210	+ 0.252	+ 0.310	+ 0.380	+ 0.465	+ 0.600	+ 0.780	+ 1.000	160	180
+ 0.166	+ 0.236	+ 0.284	+ 0.350	+ 0.425	+ 0.520	+ 0.670	+ 0.880	+ 1.150	180	200
+ 0.180	+ 0.258	+ 0.310	+ 0.385	+ 0.470	+ 0.575	+ 0.740	+ 0.960	+ 1.250	200	225
+ 0.196	+ 0.284	+ 0.340	+ 0.425	+ 0.520	+ 0.640	+ 0.820	+ 1.050	+ 1.350	225	250
+ 0.218	+ 0.315	+ 0.385	+ 0.475	+ 0.580	+ 0.710	+ 0.920	+ 1.200	+ 1.550	250	280
+ 0.240	+ 0.350	+ 0.425	+ 0.525	+ 0.650	+ 0.790	+ 1.000	+ 1.300	+ 1.700	280	315
+ 0.268	+ 0.390	+ 0.475	+ 0.590	+ 0.730	+ 0.900	+ 1.150	+ 1.500	+ 1.900	315	355
+ 0.294	+ 0.435	+ 0.530	+ 0.660	+ 0.820	+ 1.000	+ 1.300	+ 1.650	+ 2.100	355	400
+ 0.330	+ 0.490	+ 0.595	+ 0.740	+ 0.920	+ 1.100	+ 1.450	+ 1.850	+ 2.400	400	450
+ 0.360	+ 0.540	+ 0.660	+ 0.820	+ 1.000	+ 1.250	+ 1.600	+ 2.100	+ 2.600	450	500
6 to 16									IT Grade	
+ 0.400	+ 0.600								500	560
+ 0.450	+ 0.660								560	630
+ 0.500	+ 0.740								630	710
+ 0.560	+ 0.840								710	800
+ 0.620	+ 0.940								800	900
+ 0.680	+ 1.050								900	1000
+ 0.780	+ 1.150								1000	1120
+ 0.840	+ 1.300								1120	1250
+ 0.960	+ 1.450								1250	1400
+ 1.050	+ 1.600								1400	1600
+ 1.200	+ 1.850								1600	1800
+ 1.350	+ 2.000								1800	2000
+ 1.500	+ 2.300								2000	2240
+ 1.650	+ 2.500								2240	2500
+ 1.900	+ 2.900								2500	2800
+ 2.100	+ 3.200								2800	3150


B2. INTERPRETATION OF ISO SYMBOLS USING TABLE VALUES

B2.1 HOLE LETTER CODES A THRU JS


The fundamental deviation equals the lower deviation, and the following equation is valid.

$$\text{Upper Deviation} = \text{Lower Deviation} + \text{Tolerance Grade}$$

EXAMPLE 1. INTERNAL (HOLE) DIMENSION 5CD8

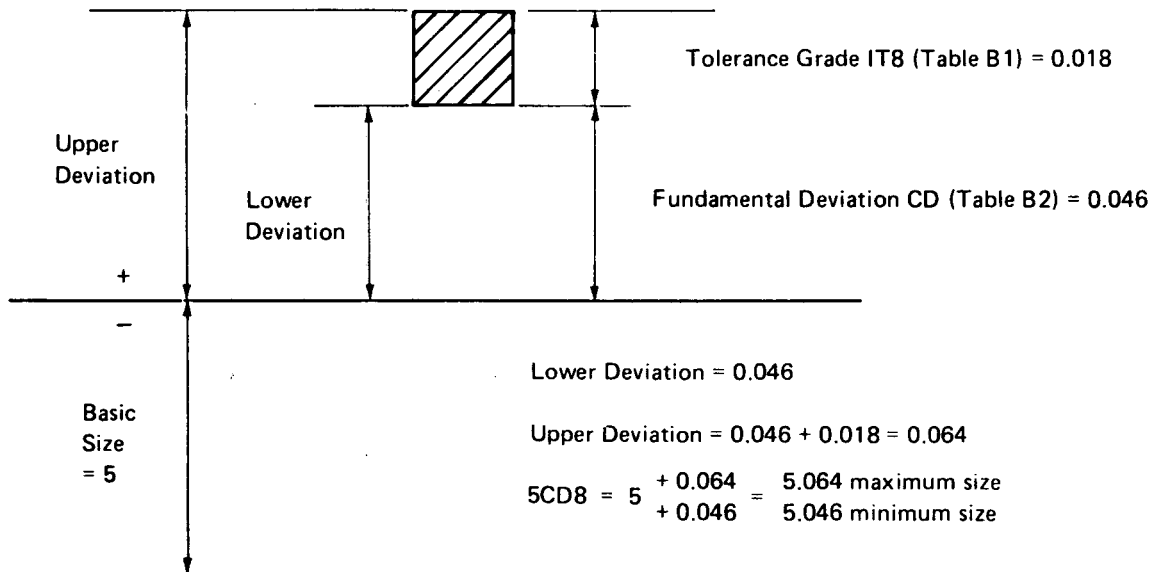

EXAMPLE 2. INTERNAL (HOLE) DIMENSION 1000H15

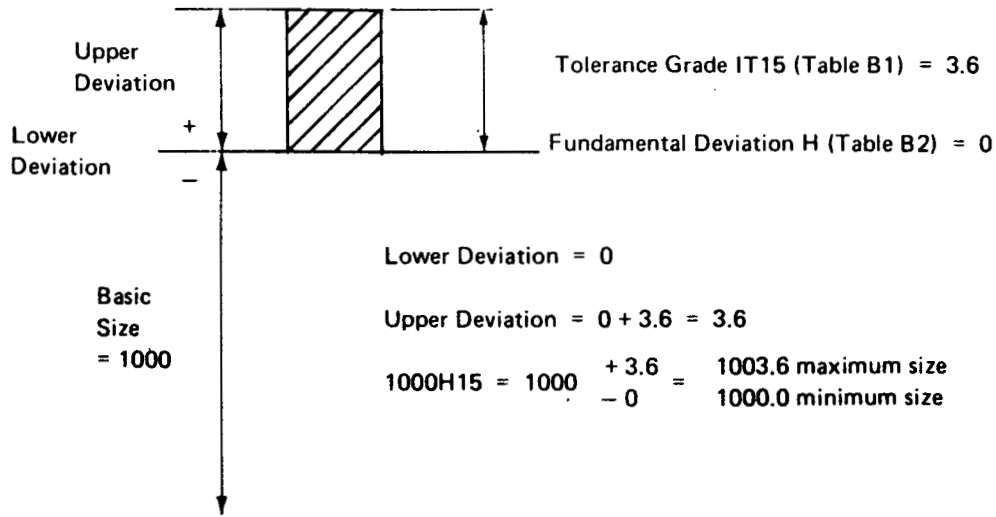


B2.2 HOLE LETTER CODES J THRU ZC


The fundamental deviation equals the upper deviation and the following equation is valid.

$$\text{Lower Deviation} = \text{Upper Deviation} - \text{Tolerance Grade}$$

EXAMPLE 3. INTERNAL (HOLE) DIMENSION 600K8

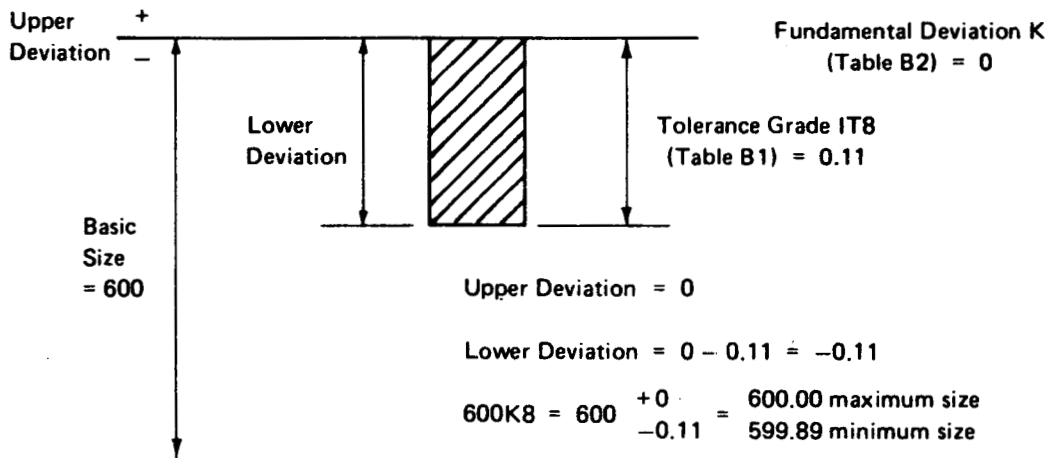

EXAMPLE 4. INTERNAL (HOLE) DIMENSION 80ZB9

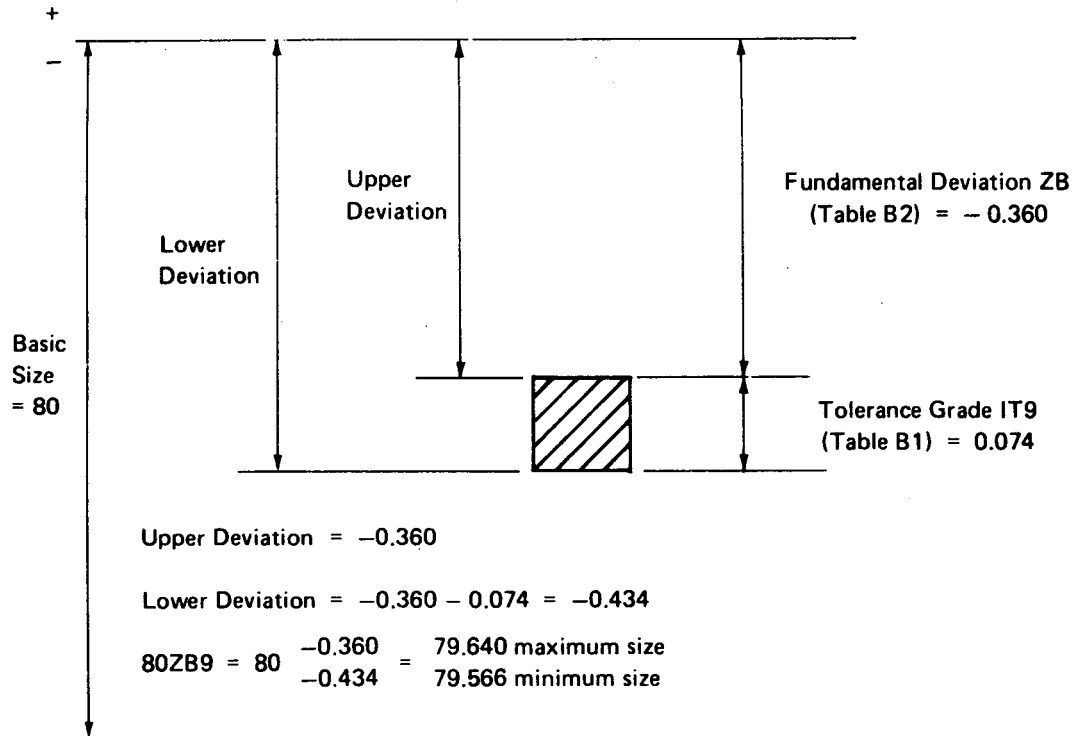


B2.3 SHAFT LETTER CODES a THRU js


Fundamental deviation equals upper deviation and the following equation is valid.

$$\text{Lower Deviation} = \text{Upper Deviation} - \text{Tolerance Grade}$$

EXAMPLE 5. EXTERNAL (SHAFT) DIMENSION 800h13

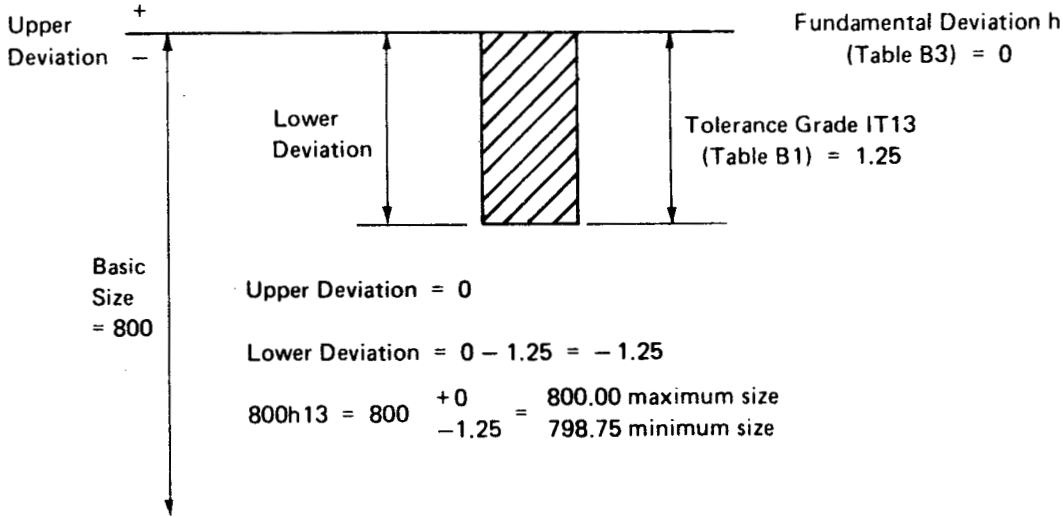

EXAMPLE 6. EXTERNAL (SHAFT) DIMENSION 50js17⁸

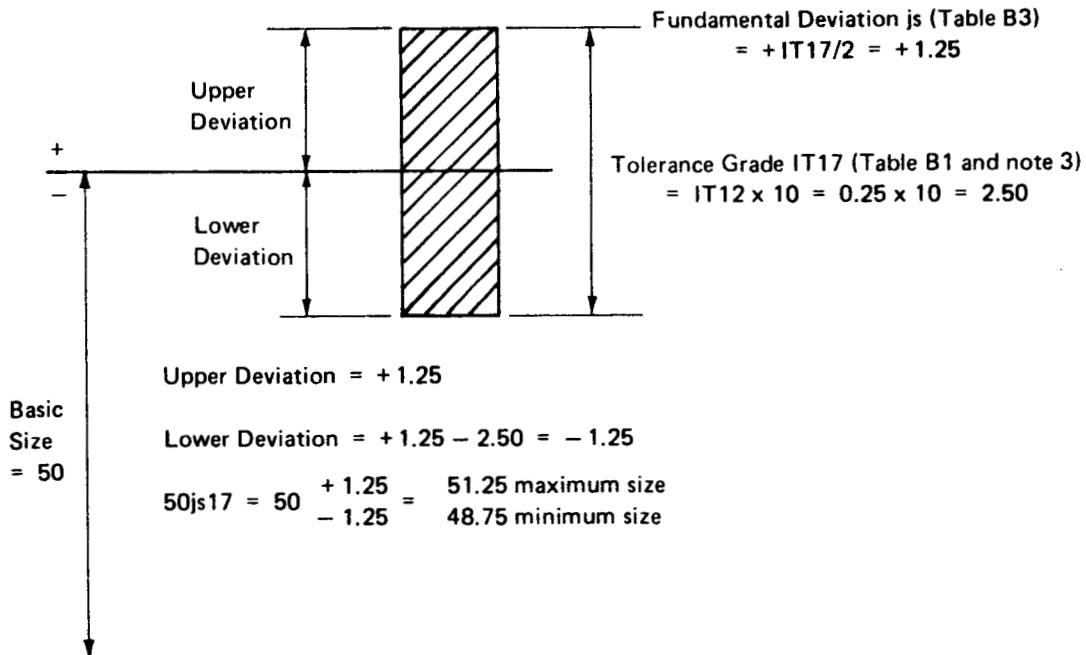


⁸ IT grades larger than IT16 are sometimes used.

B2.4 SHAFT LETTER CODES j THRU zc


The fundamental deviation equals the lower deviation and the following equation is valid.

$$\text{Upper Deviation} = \text{Lower Deviation} + \text{Tolerance Grade}$$

EXAMPLE 7. EXTERNAL (SHAFT) DIMENSION 16n11

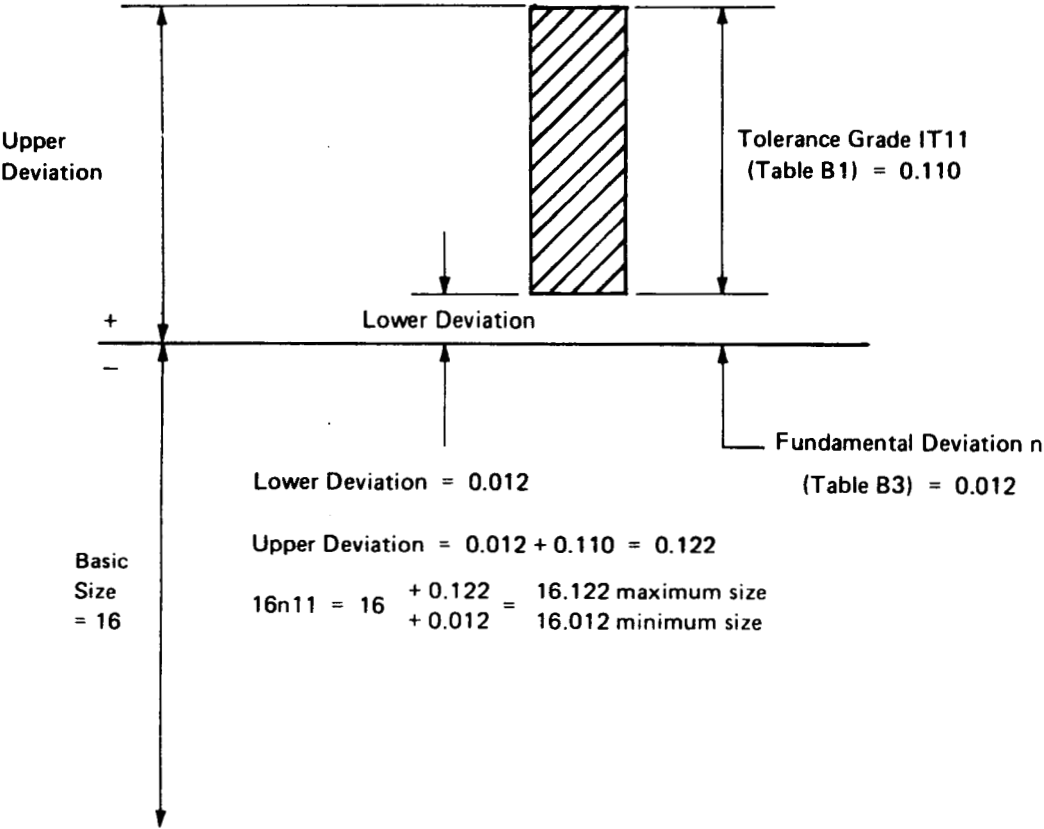

EXAMPLE 8. EXTERNAL (SHAFT) DIMENSION 25zc8

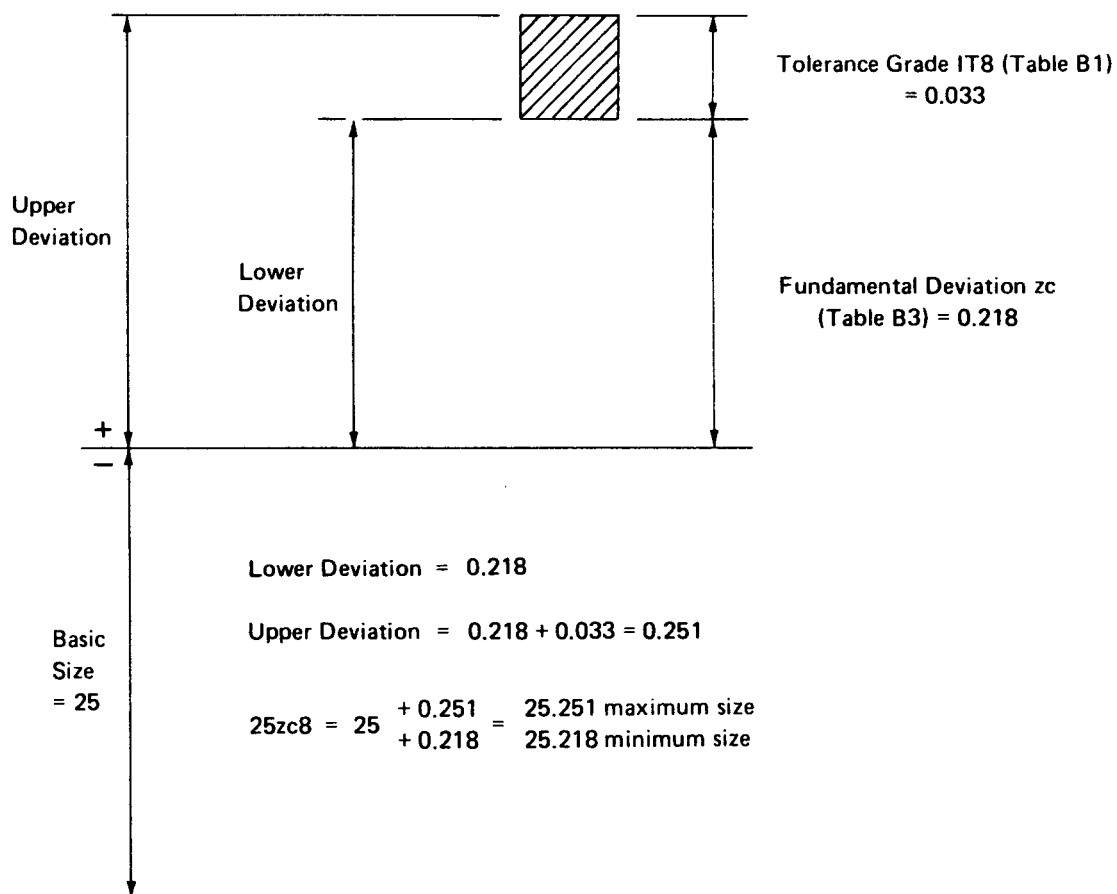

B3 DERIVATION OF TABLE VALUES

This section explains how the numerical values shown in Tables B1, B2 and B3 were derived.

B3.1 INTERNATIONAL TOLERANCE GRADES (IT)

Table B1 of International Tolerance Grades lists values based on former national standards. Formulas have been empirically determined to meet these values. Eighteen International Tolerance Grades are provided in this standard, and are designated IT01, IT0 and IT1 through IT16. The lower numerical grade number, the more precision or closer tolerance of manufacture is required. The numerical values of these tolerance grades are given in Table B1.

Determination of the steps of the more commonly used grades of IT6 through IT16 is based on the Renard R5 geometric series as shown in Table B4.

TABLE B4 Formulas for IT Grades 6 Through 16⁹

IT6	10i*	IT11	100i	IT16	1000i
IT7	16i	IT12	160i		
IT8	25i	IT13	250i		
IT9	40i	IT14	400i		
IT10	64i	IT15	640i		

$$*i = \frac{0.45 \sqrt[3]{D} + 0.001 D}{1000}$$

where i and D are in millimeters. The diameter D is considered as the geometrical mean of the maximum and minimum diameters of each step $D = \sqrt{(\text{maximum diameter}) \times (\text{minimum diameter})}$. For the whole of the step up to 3 millimeters, the diameter is considered as the geometrical mean of 1 and 3 mm.

Grades IT01 through IT5 are used for high precision and are calculated by a different method as shown in Table B5.

TABLE B5 Formulas for IT Grades 01 Through 5⁹

IT01	$\frac{(0.3 + 0.008D)}{1000}$
IT0	$\frac{(0.5 + 0.012D)}{1000}$
IT1	$\frac{(0.8 + 0.02D)}{1000}$
IT2	$(IT1) \left(\frac{7i}{IT1} \right)^{1/4}$
IT3	$(IT1) \left(\frac{7i}{IT1} \right)^{1/2}$
IT4	$(IT1) \left(\frac{7i}{IT1} \right)^{3/4}$
IT5	$7i$

⁹ Formulas for reference only. Table B1 values must be used to conform with accepted international tolerance grade values.

B3.2 DERIVATION OF FUNDAMENTAL DEVIATIONS FOR SHAFTS

The fundamental deviation has been previously defined as that one of two deviations closest to the basic size. Table B3 lists these values for shafts. This table has been developed based on experimental data and cannot in every case be totally calculated. Formulas have been derived, however, from the table values to fit most cases. The general formula is as follows:

$$\text{Fundamental Deviation} = \alpha + \frac{\beta D^\gamma}{1000}$$

where α , β , and γ are determined from Table B6 and D represents the geometric mean diameter of the particular step in millimeters. As noted in the table there are several exceptions to the general formula.

The fundamental deviation for shafts designated "a" through "h" is the upper deviation. The lower deviation is found by subtracting the numerical value of the IT grade from the fundamental deviation. The fundamental deviation for shafts designated "j" through "zc" is the lower deviation. The upper deviation is found by adding the numerical value of the IT grade to the fundamental deviation.

TABLE B6 COEFFICIENTS FOR THE CALCULATION OF FUNDAMENTAL DEVIATIONS FOR SHAFTS¹⁰

FUNDAMENTAL DEVIATION = $\alpha + \frac{\beta D^\gamma}{1000}$ Where D = Geometric Mean Diameter of Diameter Step				
FUNDAMENTAL DEVIATION	α	β	γ	NOTES
a	-0.265 0	-1.3 -3.5	1 1	$D < 120$ $D > 120$
b	-0.140 0	-0.85 -1.8	1 1	$D < 160$ $D > 160$
c	0 -0.095	-5.2 -0.8	0.2 1	$D < 40$ $D > 40$
cd	-	-	-	
d	0	-16	0.44	$cd = \sqrt{c \cdot d}$
e	0	-11	0.41	
ef	-	-	-	$ef = \sqrt{e \cdot f}$
f	0	-5.5	0.41	
fg	-	-	-	$fg = \sqrt{f \cdot g}$
g	0	-2.5	0.34	
h	0	0	0	
j	-	-	-	No formula
js	-	-	-	$js = \frac{IT^{11}}{2}$
k	0 0	0.6 0	0.33 0	IT4-IT7* $D \leq 500$ IT8-IT16* $D > 500$
m	$\frac{IT7^{11}}{1000}$ 0.013	-IT6 ¹¹ 0.024	0 1	$D \leq 500$ $D > 500$
n	0 0.021	5 0.04	0.34 1	$D \leq 500$ $D > 500$
p	IT7 ¹¹ 0.038	2 0.072	0 D	$D \leq 500$ $D > 500$
r	-	-	-	$r = \sqrt{p \cdot s}$
s	IT8 ¹¹ IT7 ¹¹	2 0.4	0 1	$D \leq 50$ $D > 50$
t	IT7 ¹¹	0.63	1	
u	IT7 ¹¹	1	1	
v	IT7 ¹¹	1.25	1	
x	IT7 ¹¹	1.6	1	
y	IT7 ¹¹	2	1	
z	IT7 ¹¹	2.5	1	
za	IT8 ¹¹	3.15	1	
zb	IT9 ¹¹	4	1	
zc	IT10 ¹¹	5	1	

¹⁰ Formulas for reference only. Table B3 values must be used to conform with accepted international fundamental deviation values.

¹¹ Use the Numerical Value for this International Tolerance Grade.

B3.3 DERIVATION OF FUNDAMENTAL DEVIATIONS FOR HOLES

The fundamental deviations for holes are based on the fundamental deviations for shafts. The relationship varies with both fundamental deviation letter and IT grade. The general rule for determining the fundamental deviation of a hole is as follows:

For fundamental deviations *A* through *H*, the lower deviation for holes equal minus the upper deviation for shafts and for fundamental deviations *J* through *ZC* the upper deviation for holes equals minus the lower deviation for shafts. This is shown pictorially in Figure B1.

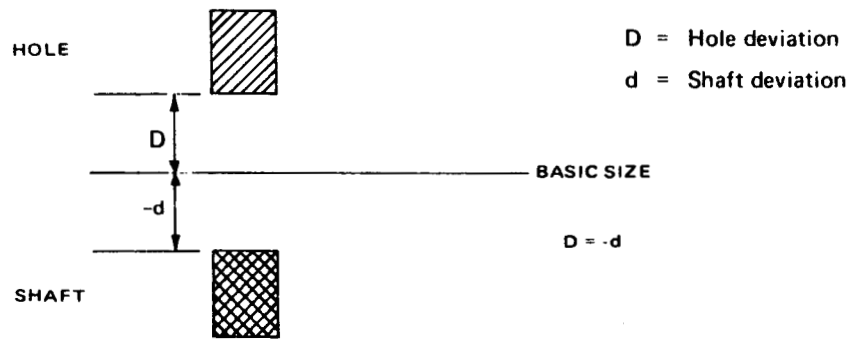


FIG. B1 GENERAL RULE

There are several exceptions to the general rule. The reasons for these exceptions must be maintained in order to keep the tables consistent with ISO standards. The exceptions to the general rule are as follows:

1. For holes *N* for IT grades 9 through 16 above 3 mm, the fundamental deviation = 0.000
2. For holes *J*, *K*, *M* and *N* up to IT grade 8 inclusive and *P* through *ZC* up to IT grade 7 inclusive above 3 mm, the fundamental deviation is calculated as follows: The upper deviation of the hole equals minus the lower deviation of the shaft plus the difference between the tolerance of the grade in question and that of the next finer grade.

$$\text{Upper Deviation (hole)} = -\text{lower deviation (shaft)} + \Delta$$

$$\begin{aligned} \text{Where } \Delta &= IT_n - IT_{n-1} \\ &= IT(\text{shaft}) - IT(\text{next finer shaft}) \end{aligned}$$

Using a hole 60 P7 as an example, the calculation is as follows:

$$\begin{aligned} -0.032 + (0.030 - 0.019) &= -0.021 \text{ or } 59.979 \text{ (Max. hole size)} \\ \text{(Table B3)} + \text{(Table B1 grade 7 - grade 6)} &= \text{(Table B2) (Table 5)} \end{aligned}$$

B4. CONVERSION OF FITS

It may sometimes be necessary or desirable to modify the tolerance zone on one or both of two mating parts, yet still keep the *total* tolerance and fit condition the same. Examples of this appear in Figure 6 of ANSI B4.2 when converting from a hole basis fit to a shaft basis fit. The corresponding fits are identical yet the individual tolerance zones are different.

The rule for converting from one type of fit to another can be simply stated as, "Reverse the fundamental deviations between the shaft and hole keeping the IT grade the same on each individual part." Two examples of this are shown below. Each of the examples represent a preferred fit from Figure 6 of ANSI B4.2 and are for a 60 millimeter basic size.

EXAMPLE 9. FIT 60H11/c11 CONVERTED TO 60C11/h11

Initial hole basis *loose running* fit, designation 60H11/c11 (values shown from Table 2).

$$\text{Hole } 60H11 \begin{pmatrix} 60.190 \\ 60.000 \end{pmatrix}; \quad \text{Shaft } 60c11 \begin{pmatrix} 59.860 \\ 59.670 \end{pmatrix}; \quad \text{Fit } 60H11/c11 \begin{pmatrix} 0.520 \\ 0.140 \end{pmatrix}$$

Desired shaft basis *loose running* fit, designation 60C11/h11 (values shown from Table 4).

$$\text{Hole } 60C11 \begin{pmatrix} 60.330 \\ 60.140 \end{pmatrix}; \quad \text{Shaft } 60h11 \begin{pmatrix} 60.000 \\ 59.810 \end{pmatrix}; \quad \text{Fit } 60C11/h11 \begin{pmatrix} 0.520 \\ 0.140 \end{pmatrix}$$

The above two fits have the same maximum clearance (0.520) and the minimum clearance (0.140). Pictorially this is shown in Figure B2.

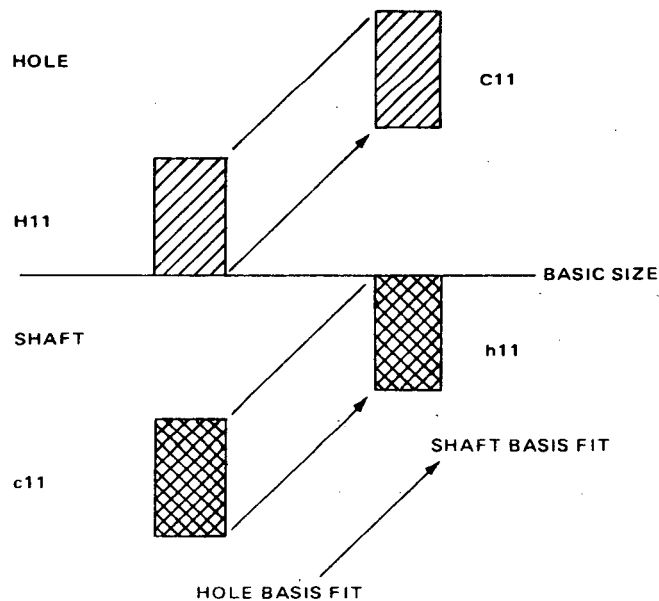


FIG. B2 CONVERSION FROM A HOLE BASIS CLEARANCE FIT TO A SHAFT BASIS CLEARANCE FIT

EXAMPLE 10. FIT 60H7/p6 CONVERTED TO 60P7/h6

Initial hole basis *locational interference* fit, designation 60H7/p6 (values shown from Table 3).

$$\text{Hole 60H7} \begin{pmatrix} 60.030 \\ 60.000 \end{pmatrix}; \quad \text{Shaft 60p6} \begin{pmatrix} 60.051 \\ 60.032 \end{pmatrix}; \quad \text{Fit 60H7/p6} \begin{pmatrix} -0.002 \\ -0.051 \end{pmatrix}$$

Desired shaft basis *locational interference* fit, designation 60P7/h6 (values shown from Table 5).

$$\text{Hole 60P7} \begin{pmatrix} 59.979 \\ 59.949 \end{pmatrix}; \quad \text{Shaft 60h6} \begin{pmatrix} 60.000 \\ 59.981 \end{pmatrix}; \quad \text{Fit 60P7/h6} \begin{pmatrix} -0.002 \\ -0.051 \end{pmatrix}$$

The above two fits have the same minimum interference (-0.002) and the maximum interference (-0.051). Pictorially, this is shown in Figure B3.

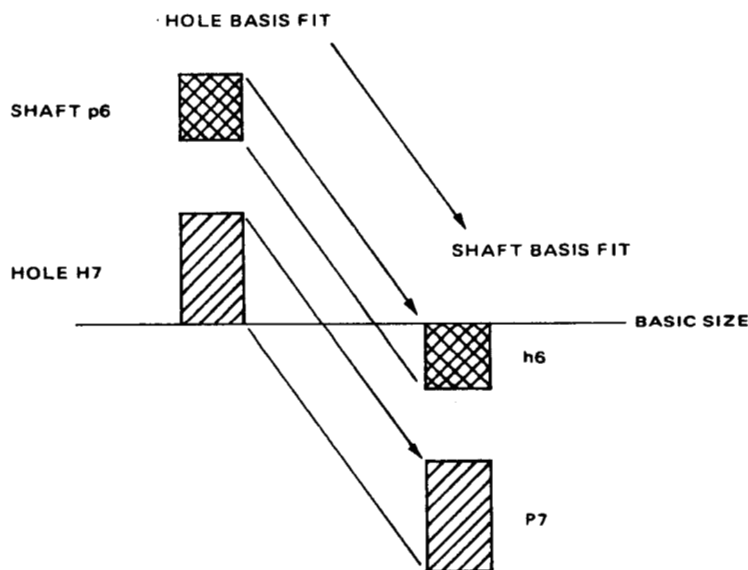


FIGURE B3 CONVERSION FROM A HOLE BASIS INTERFERENCE FIT TO A SHAFT BASIS INTERFERENCE FIT

Conversion of fits is not limited to shaft and hole basis fits as the following examples show:

$$\text{clearance fit} \quad C10/f10 = F10/c10$$

$$\text{interference fit} \quad P9/t9 = T9/p9$$

$$\text{clearance fit} \quad D7/f6 = F7/d6$$

$$\text{interference fit} \quad S7/u6 = U7/s6$$

$$\text{transition fit} \quad K8/n7 = N8/k7$$

The above examples can be confirmed by calculations using Tables A1 through A24.

APPENDIX C

APPLICATIONS

Many factors, such as length of engagement, bearing load, speed, lubrication, operating temperature, humidity, surface texture, and materials, must be taken into consideration in the selection of fits for a particular application. Choice of other than the preferred fits might be considered necessary to satisfy extreme conditions. Subsequent adjustments might also be desired as the result of experience in a particular application to suit critical functional requirements or to permit optimum manufacturing economy. Selection of departure from these recommendations will depend upon consideration of the engineering and economic factors that might be involved, however, the benefits derived from use of preferred fits should not be overlooked.

To indicate the machining processes which may normally be expected to produce work within the tolerances indicated by the IT tolerance grades given in this standard, Figure C1 has been provided. This information is intended merely as a guide in selecting suitable processes for a particular IT tolerance grade.

Practical usage of the various IT tolerance grades is shown in Figure C2.

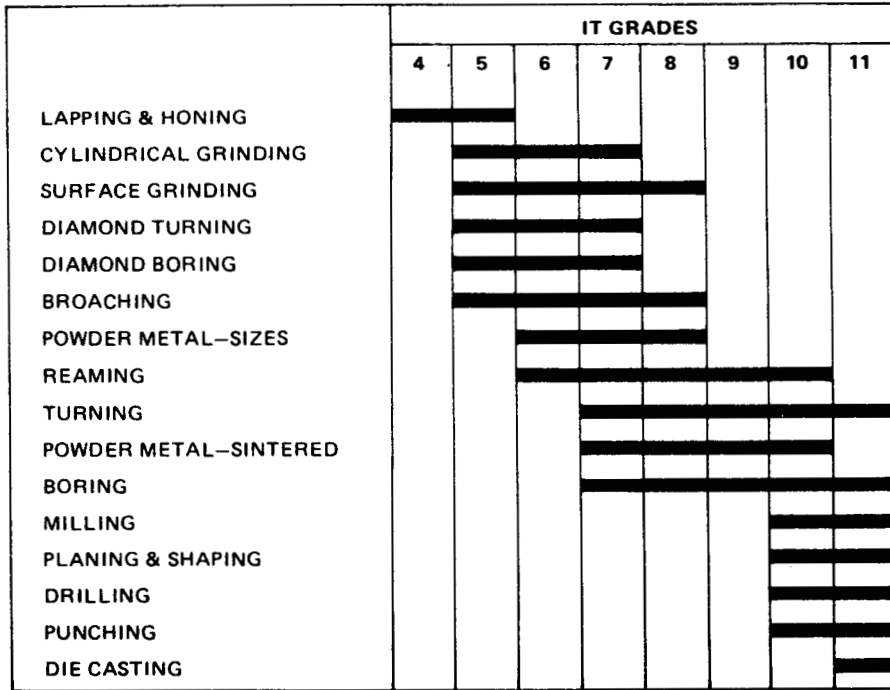


FIG. C1 MACHINING PROCESSES

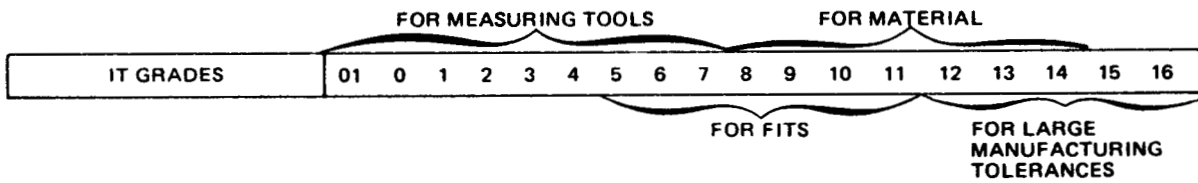


FIG. C2 PRACTICAL USE OF INTERNATIONAL TOLERANCE GRADES

APPENDIX D

REFERENCE TEMPERATURE

The standard reference temperature for industrial length measurements is 20 degrees Celsius.

For other temperatures, particularly when the gage is made from another type of material than the part to be inspected corrections should be made in accordance with the difference in thermal expansion¹² for the two parts.

Example: Measure a hole in an aluminum die casting with a steel gage at the room temperature 30 °C.

Temperature correction	Δ
Length specified	$L = 20.021 \text{ mm}$
Room temperature	$t = 30 \text{ }^\circ\text{C}$
Reference temperature	$t_R = 20 \text{ }^\circ\text{C}$
Linear thermal expansion coefficient for parts made from the material SAE 452 Grade 310	$\alpha_{\text{Part}} = 24.7 \times 10^{-6} \text{ mm/mm} \cdot ^\circ\text{C}$
Linear thermal expansion coefficient for gages made from 1.08% carbon steel	$\alpha_{\text{Gage}} = 10.8 \times 10^{-6} \text{ mm/mm} \cdot ^\circ\text{C}$

$$\begin{aligned}\Delta &= L (t - t_R) (\alpha_{\text{Part}} - \alpha_{\text{Gage}}) \\ &= 20.021 (30 - 20) (24.7 - 10.8) 10^{-6} \text{ mm} \\ &= 2782.919 10^{-6} \text{ mm} \\ &\approx 0.003 \text{ mm}\end{aligned}$$

The dimension to read on the gage for hole measurement is temperature corrected to 20.024 mm.

¹² Linear thermal expansion coefficients for metals and alloys are shown in the "Materials Handbook" published by American Society for Metals, Metals Park, Ohio 44073.



L00054